



# REVEGO

**Pocket systems for  
new space concepts**

Ordering and planning information

[www.blum.com](http://www.blum.com)

 **blum**<sup>®</sup>



reddot winner 2022



More and more people are merging their kitchen, dining, living and working space. This trend places high demands on modern living concepts. Pocket systems make it possible to quickly, easily and intuitively open up entire spaces when needed, and close them off again when not in use. This gives you completely new design possibilities for a wide range of applications.

Blum's new product category is the solution for optimum space utilisation: REVEGO pocket systems is a unique slide-in door system with sophisticated technology integrated into its own narrow cabinet — the pocket.



## Contents

- 10 Overview of product range
- 12 Planning approach and product selection
- 14 REVEGO uno, single door
- 24 REVEGO uno + uno  
Two single doors combined
- 34 REVEGO duo, double door
- 46 REVEGO uno + duo,  
single door and double door combined
- 64 REVEGO duo + duo,  
two double doors combined
- 76 Calculations and assembly of the profiles
- 81 EXPANDO T – for thin fronts
- 82 Assembly devices
- 83 Testing and inspection regulations





### Efficient manufacturing

REVEGO comes with all essential components thanks to the unique pocket construction with fully integrated fittings. You can easily pre-assemble pocket systems in your workshop or premises and transport them to end users in a carefully packaged state. This makes installation on site easier and increases efficiency.



Get a life-like experience of REVEGO.  
Download the AR application and get started:

[www.blum.com/rev3](http://www.blum.com/rev3)





### Rapid on-site installation

Final assembly on site is simplicity itself: set up, align and mount the pockets; install the doors and track; make adjustments to the gap layout – and that's it! The 3-dimensional adjustment options are easily accessible and intuitive to use. And thanks to the integrated service interface, it is really simple to remove the fittings – even from built-in furniture.



### Easy planning

Standardised pocket widths of 100 mm for REVEGO uno single door and 150 mm for REVEGO duo double door give you the freedom to design the furniture around the pocket exactly as you wish. Single and double door applications can be individually combined.



### The ultimate in convenience

No need for handles thanks to TIP-ON motion technology; users can open cabinet doors with a single touch and slide them away completely into the pocket. To close off the space, the user simply presses the door to release it from the pocket and then presses it again to elegantly conceal the entire area.



## REVEGO at a glance

- Fast and easy installation thanks to pre-mounted fittings
- Unique pocket construction with fully integrated technology
- Easy planning thanks to predefined pocket widths
- Enhanced ease and mesmerising motion
- Individual design possibilities through the combination of REVEGO uno (1) and REVEGO duo (2)
- Different nominal lengths allow you to adapt applications to the installation situation
- Smooth opening and closing without a handle thanks to integrated TIP-ON motion technology
- Can be designed with or without plinth option or as a worktop-mounted cabinet
- Precise and easily accessible 3-dimensional adjustment options
- Full overlay fronts completely conceal the pocket when closed for a perfect gap layout
- Pocket systems can be used in all living areas
- Suitable for systems to conceal runs of cabinets or walk-in solutions such as dressing rooms or pantries, etc.
- Fittings can be easily removed (even from built-in furniture) thanks to an integrated service interface





Use REVEGO uno single doors on their own, or combine them with REVEGO duo double doors as desired. The full overlay fronts with a height of up to 2980 mm conceal the pocket completely when closed.



It is easy to implement solutions with internal cabinetry or walk-in solutions such as dressing rooms or pantries.



From a front height of 1130 mm, REVEGO can also be implemented as a worktop-mounted cabinet.

### Easy product selection

Our Product Configurator makes it easy for you to choose your products and provides checked parts lists, planning information and CAD data.



[www.blum.com/rev1](http://www.blum.com/rev1)

# Our services at a glance

Our services support you every step of the way – from planning and design through to manufacturing and assembly. Take advantage of our tried-and-tested and user-friendly services for your projects with REVEGO.



## Concept, planning and product selection

Our Product Configurator will help you select the right products quickly and efficiently. It gives you checked parts lists and planning information, as well as accurate production drawings.



## Design

You can export REVEGO projects in various CAD formats for use in your own design software. Together with selected partners, we have also established interfaces for the straightforward transfer of data and completion of your project in your design software.



## Ordering

Simply transfer your parts lists from the Product Configurator directly to the web shop of selected distributors. Your REVEGO configurations are easily saved to "My projects", where you can then manage your customer projects.



## Manufacturing

Speed up your production process with our Product Configurator. Transfer the planning results to MINIPRESS top with EASYSTICK (using BXF) or directly to your CNC machine. In order to transfer the data to your CNC machine, you'll receive specially prepared CAM data (CAM DXF or complete WOP drilling programs) in the Product Configurator. This makes production processes on the CNC machine even quicker and easier.



Find out more about our digital services:  
[www.blum.com/pcf1](http://www.blum.com/pcf1)



Register now free of charge to take advantage of the digital services.  
[www.blum.com/esvs1](http://www.blum.com/esvs1)



## Overview of applications and planning notes

### REVEGO uno – single door right or left



Page 14

- Number of fronts: 1
- Installation width: 450 to 900 mm
- Internal width within the application: 350 to 800 mm
- Front width: 442–898 mm

### REVEGO uno + uno – two single doors combined



Page 24

- Number of fronts: 2
- Installation width: 900 to 1800 mm
- Internal width within the application: 700 to 1600 mm
- Front width: 442–898 mm

### REVEGO duo – double door right or left



Page 34

- Number of fronts: 2
- Installation width: 900 to 1500 mm
- Internal width within the application: 750 to 1350 mm
- Front width: 442–748 mm

## Overview of applications and planning notes

### REVEGO uno + duo – single door and double door combined



Page 46

- Number of fronts: 3
- Installation width: 1350 to 2400 mm
- Internal width within the application: 1100 to 2150 mm
- Front width: 442–748 mm and 442–898 mm

### REVEGO duo + duo – two double doors combined




Page 64

- Number of fronts: 4
- Installation width: 1800 to 3000 mm
- Internal width within the application: 1500 to 2700 mm
- Front width: 442–748 mm



Watch assembly video:  
[www.blum.com/rev2](http://www.blum.com/rev2)

## Planning approach and product selection

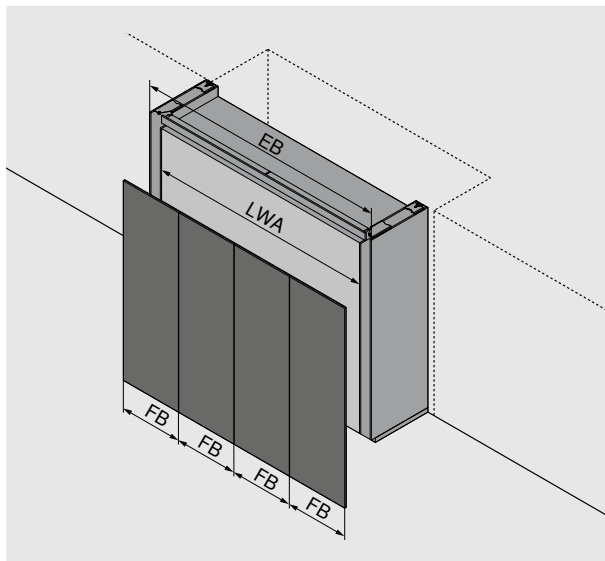

|     |                                       |
|-----|---------------------------------------|
| EB  | Installation width                    |
| LWA | Internal width within the application |
| FB  | Front width                           |

### Niche installation

Planning approach from outside moving inward with fixed installation width EB for the entire application. The space available determines the installation width EB and is the decisive factor for the number of fronts, front widths FB and thus for the choice of application. The fittings and cabinet dimensions within the application can be determined in the next step.

| 1.                                                                 | 2.                                                                                              | 3.                                                                                                                                                                                  |
|--------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| What recess width is available for the application?                | Determine the possible number of fronts and front widths FB based on the installation width EB. | The pocket dimensions, front protrusion FU and internal dimensions can now be defined on the planning pages of the respective application, and additional fittings can be selected. |
| The recess width is the installation width EB for the application. | This will determine the type of application.                                                    |                                                                                                                                                                                     |

### Free-standing installation

Planning approach from the inside moving outward with focus on the cabinet width KB and cabinetry within the application. The cabinetry to be concealed is the decisive factor for the potential number of fronts, front widths FB and thus for the choice of application. The installation dimensions and fittings are determined in the next step.

| 1.                                                                     | 2.                                                                                                                  | 3.                                                                                                                                                             |
|------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| What is the cabinet width KB that needs to be concealed?               | Determine the possible number of fronts and front widths FB based on the internal width within the application LWA. | The pocket dimensions and front protrusion FU can now be defined on the planning pages of the respective application, and additional fittings can be selected. |
| The cabinet width KB is the internal width within the application LWA. | This will determine the type of application and its installation width EB.                                          |                                                                                                                                                                |

### Front width FB and number of fronts

Planning approach with pre-defined front widths FB and number of fronts. The pre-defined front width FB and the number of fronts determine the choice of application and are the decisive factor for the installation width of the entire application. The fittings and cabinet dimensions within the application can be determined in the next step.


| 1.                                                           | 2.                                                                                                      | 3.                                                                                                                                                                                  |
|--------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| What front width FB and what number of fronts were selected? | The type of application and desired front width FB plus the side gaps determine the installation width. | The pocket dimensions, front protrusion FU and internal dimensions can now be defined on the planning pages of the respective application, and additional fittings can be selected. |
| The number of fronts defines the type of application.        |                                                                                                         |                                                                                                                                                                                     |




## Planning approach and product selection

### Min. distance

#### REVEGO uno

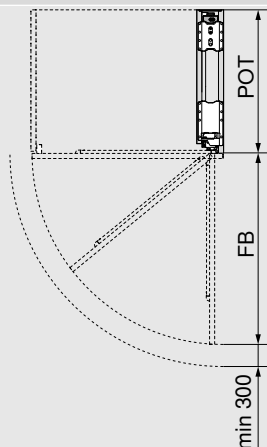

#### REVEGO duo

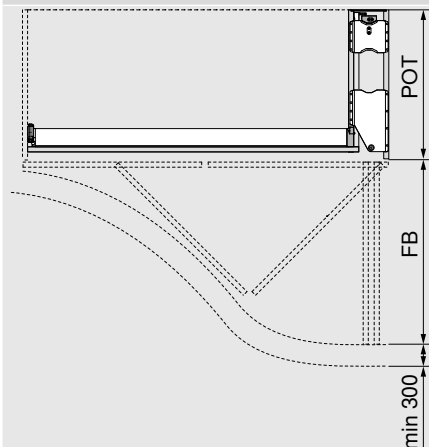

A minimum distance to the nearest element in front of the pocket must be kept free for safety reasons!


FB + min. 300 mm

FB Front width


POT Pocket depth

### Front protrusion FU

The minimum front protrusion results from the combination of nominal length, front width and the TIP-ON trigger path (AW) when using standard nominal lengths (pocket profile set with TIP-ON). By cutting the profiles to size, the front protrusion (FU) can be customised (min. FU = 7 mm).



#### Example



$$FU = FB + AW - NL$$

AW TIP-ON trigger path


FB Front width

FU Front protrusion

NL Nominal length

### Depth requirement

The depth requirement is the pocket depth (POT) and is determined by the nominal length + 100 mm, plus the pocket back.



NL Nominal length

PORW Pocket back

POT Pocket depth

### Note

- The internal dimensions within the application (internal width | internal height | internal depth) define the maximum space available for internal cabinetry
- Design the widest front first for combined applications
- The manual operating force is less than 70 N according to the durability test
- Drilling patterns, cut-to-size dimensions and detailed parts lists can be found in the Product Configurator

### Assembly

- You will need a CNC machine or **MINIPRESS top** with **EASYSTICK** from Blum to machine the wooden parts
- Please note that both horizontal drillings and additional wood machining (e.g. a track cut-out) will be needed
- We recommend using the drilling template for **REVEGO** for the horizontal drillings
- See appendix for calculation and assembly information for cutting profiles to size



For more safety information,  
please go to:


[www.blum.com/rev4](http://www.blum.com/rev4)

## REVEGO uno – single door right or left



| Space requirement                               |                                           |                                            |                                           |
|-------------------------------------------------|-------------------------------------------|--------------------------------------------|-------------------------------------------|
| Installation dimensions (mm)                    | Installation width EB                     | Installation height EH                     | Installation depth ET                     |
|                                                 | 450–900                                   | 1155–3012                                  | from 573                                  |
| Internal dimensions within the application (mm) | Internal width within the application LWA | Internal height within the application LHA | Internal depth within the application LTA |
|                                                 | up to 800                                 | up to 2999                                 | from 518                                  |
| Pocket dimensions (mm)                          | Pocket width POB                          | Pocket height POH                          | Pocket depth POT                          |
|                                                 | 100                                       | 1142–2999                                  | from 553                                  |
| Front dimensions (mm)                           | Front width FB                            | Front height FH                            | Front thickness FD                        |
|                                                 | 442–898                                   | 1130–2980                                  | 18–26                                     |
| Front weight FG                                 | up to 35 kg per front                     |                                            |                                           |

### Overview

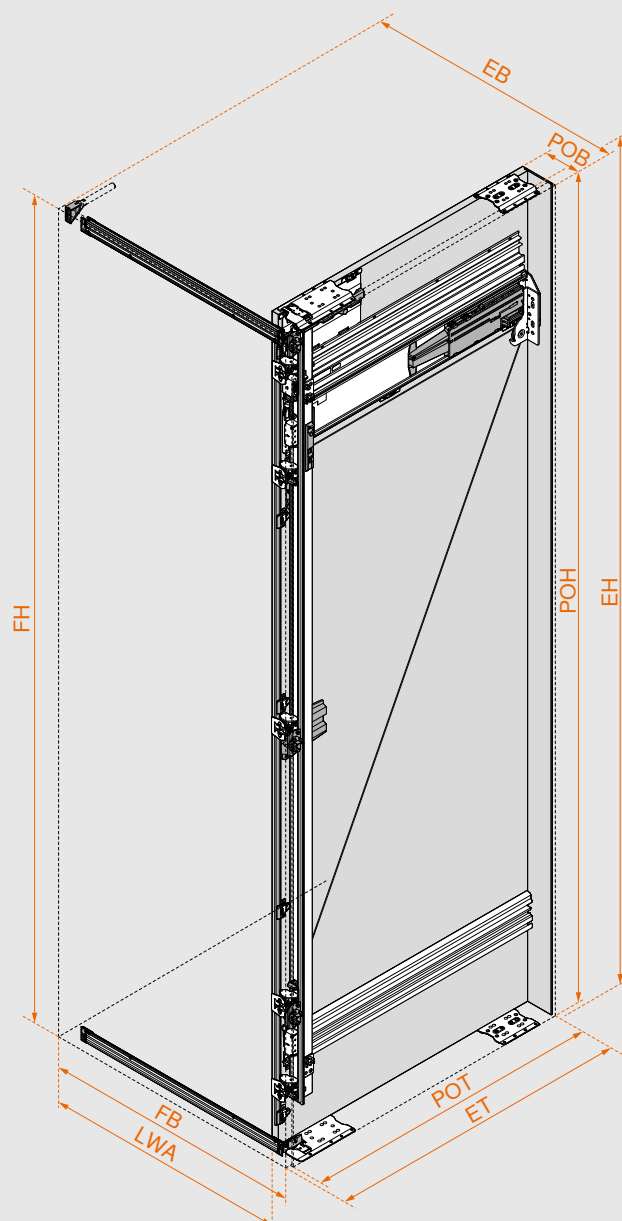

#### Fittings selection made easy

It is easy to work out the fittings and drilling positions you need using the Product Configurator.

With every product configuration, you will receive manufacturing drawings, cutting lists for wooden parts and fittings, 3D CAD data for your design software, as well as CAM programs including drilling information for direct machining on your CNC machine, in addition to the checked parts list.

Enter the web code in the Product Configurator, click on the short URL or scan the QR code. Don't have login information for digital services yet? Register here and get access free of charge.

Web code

DQIU7Y




**Product Configurator**  
www.blum.com/rev8



**Assembly and adjustment**  
www.blum.com/rev5

## Component overview

### Pocket

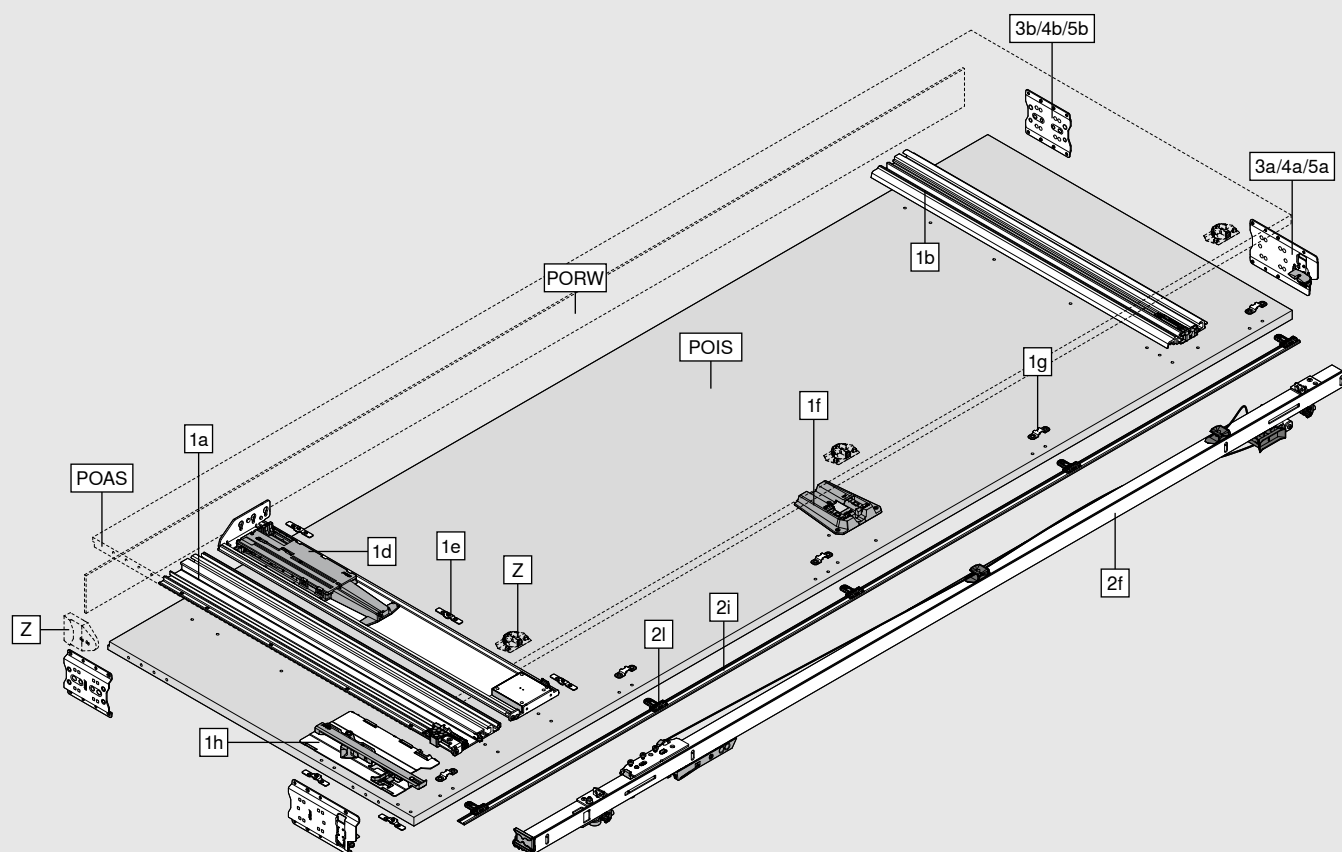


### Consisting of:

|          |                                             |
|----------|---------------------------------------------|
| 1a       | Top pocket profile                          |
| 1b       | Bottom pocket profile                       |
| 1d       | TIP-ON unit pocket                          |
| 1e       | Fixing clips                                |
| 1f       | BLUMOTION unit pocket                       |
| 1g       | Attachment for pocket cover strip           |
| 1h       | BLUMATIC unit                               |
| 2f       | Hinge bracket                               |
| 2i       | Pocket cover strip                          |
| 2l       | Mounting for pocket cover strip             |
| 3a/4a/5a | Front pocket connector                      |
| 3b/4b/5b | Rear pocket connector                       |
| Z        | Adapter for electrical appliance switch-off |
|          | Scuff guard                                 |
| POAS     | External pocket side                        |
| POIS     | Internal pocket side                        |
| PORW     | Pocket back                                 |



## Component overview

### Front

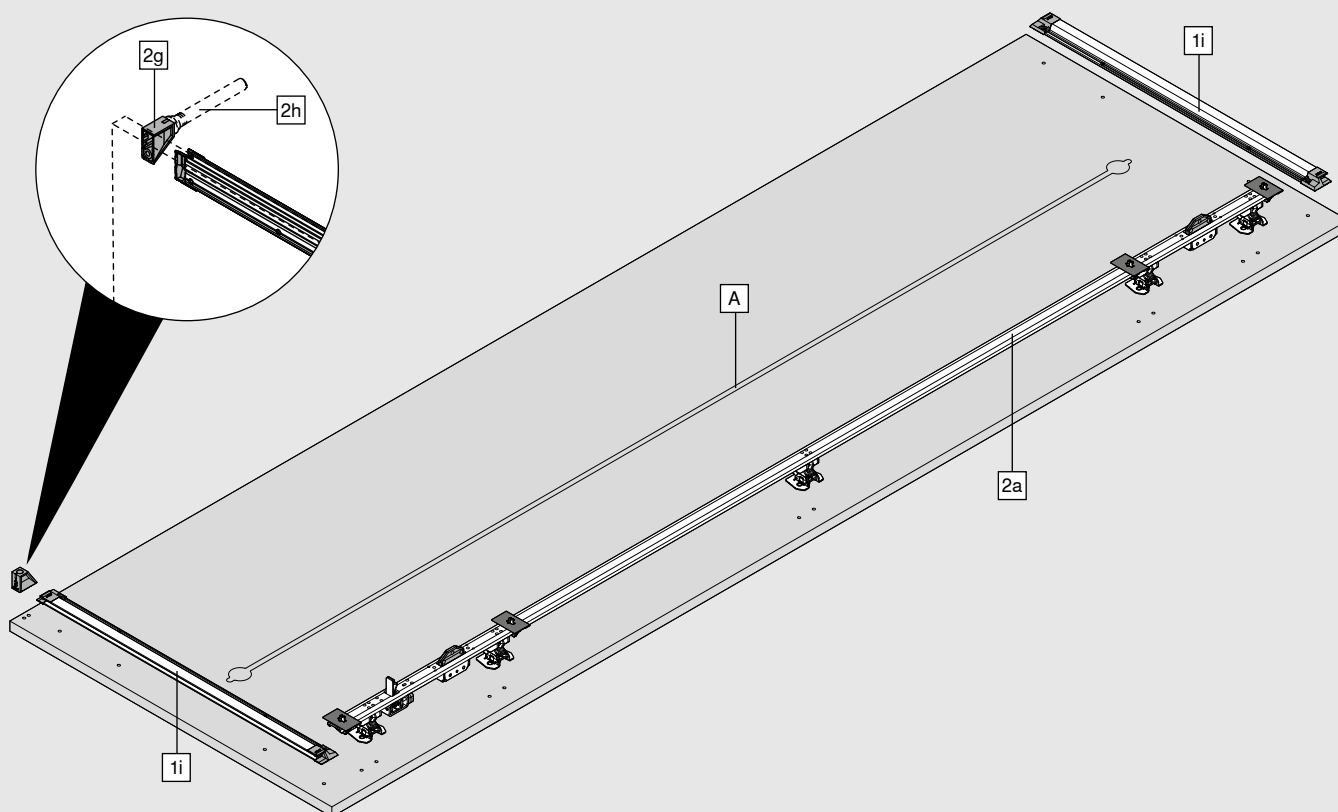

### Consisting of:

|    |                          |
|----|--------------------------|
| 1i | Door stabiliser          |
| 2a | Hinge strip              |
| 2g | TIP-ON spacer            |
| 2h | TIP-ON incl. catch plate |

A We recommend at least one alignment fitting with a maximum installation height of 3 mm.  
Alignment fittings with a height of more than 3 mm must not be used in the pocket.

## Ordering information

| 1                                                                                 | Pocket profile set with TIP-ON |                             |             |             |
|-----------------------------------------------------------------------------------|--------------------------------|-----------------------------|-------------|-------------|
|  | Nominal length NL (mm)         | Min. pocket depth POT* (mm) | Left        | Right       |
|                                                                                   | 450                            | 550                         | 801P450E.L3 | 801P450E.R3 |
|                                                                                   | 500                            | 600                         | 801P500E.L3 | 801P500E.R3 |
|                                                                                   | 600                            | 700                         | 801P600E.L3 | 801P600E.R3 |
|                                                                                   | 700                            | 800                         | 801P700E.L3 | 801P700E.R3 |
|                                                                                   | 800                            | 900                         | 801P800E.L3 | 801P800E.R3 |

\* Specification without pocket back. A back construction with a thickness of at least 3 mm is required.  
Pocket profiles and TIP-ON unit pocket can be shortened to any nominal length.

### Consisting of:

|    |     |                                                               |
|----|-----|---------------------------------------------------------------|
| 1a | 1 x | Top pocket profile                                            |
| 1b | 1 x | Bottom pocket profile                                         |
| 1d | 1 x | TIP-ON unit pocket                                            |
| 1e | 5 x | Fixing clips                                                  |
| 1f | 1 x | BLUMOTION unit pocket                                         |
| 1g | 5 x | Attachment for pocket cover strip                             |
| 1h | 1 x | BLUMATIC unit                                                 |
| 1i | 2 x | Door stabiliser: runner profile incl. end cap, black anodised |

| 2                                                                                   | Hinge bracket set  |             |             |
|-------------------------------------------------------------------------------------|--------------------|-------------|-------------|
|  | Pocket height (mm) | Left        | Right       |
|                                                                                     | 1142–1356          | 801T1140.L3 | 801T1140.R3 |
|                                                                                     | 1357–1506          | 801T1350.L3 | 801T1350.R3 |
|                                                                                     | 1507–1656          | 801T1500.L3 | 801T1500.R3 |
|                                                                                     | 1657–1806          | 801T1650.L3 | 801T1650.R3 |
|                                                                                     | 1807–1956          | 801T1800.L3 | 801T1800.R3 |
|                                                                                     | 1957–2106          | 801T1950.L3 | 801T1950.R3 |
|                                                                                     | 2107–2256          | 801T2100.L3 | 801T2100.R3 |
|                                                                                     | 2257–2406          | 801T2250.L3 | 801T2250.R3 |
|                                                                                     | 2407–2556          | 801T2400.L3 | 801T2400.R3 |
|                                                                                     | 2557–2706          | 801T2550.L3 | 801T2550.R3 |
|                                                                                     | 2707–2856          | 801T2700.L3 | 801T2700.R3 |
|                                                                                     | 2857–2999          | 801T2850.L3 | 801T2850.R3 |

Cover strips must be shortened to the required length

### Consisting of:

|    |       |                                                     |
|----|-------|-----------------------------------------------------|
| 2a | 1 x   | Hinge strip, black                                  |
| 2f | 1 x   | Hinge bracket                                       |
| 2g | 1 x   | TIP-ON spacer                                       |
| 2h | 1 x   | TIP-ON incl. catch plate, black                     |
| 2i | 1 x   | Pocket cover strip, black anodised                  |
| 2l | 3–5 x | Mountings for pocket cover strip                    |
| -  | 21 x  | System screws for 1i, 2a and 2g, 6 x 14.5 mm, black |

## Ordering information

| Pocket connector set                                                             |                            |                        |        |  |
|----------------------------------------------------------------------------------|----------------------------|------------------------|--------|--|
| 3                                                                                | Application with plinth    |                        |        |  |
|  | Pocket side thickness (mm) |                        | Colour |  |
|                                                                                  | 15–19                      |                        | Black  |  |
| 801V505B                                                                         |                            |                        |        |  |
| Pocket connector top + bottom: POVH 10 mm for 0–6 mm gap                         |                            |                        |        |  |
| POVH Pocket connector height                                                     |                            |                        |        |  |
| Consisting of:                                                                   |                            |                        |        |  |
| 3a                                                                               | 2 x                        | Front pocket connector |        |  |
| 3b                                                                               | 2 x                        | Rear pocket connector  |        |  |

| Pocket connector set                                                             |                            |                        |        |             |             |
|----------------------------------------------------------------------------------|----------------------------|------------------------|--------|-------------|-------------|
| 4                                                                                | Application without plinth |                        |        |             |             |
|  | Pocket side thickness (mm) |                        | Colour | Left        | Right       |
|                                                                                  | 15–19                      |                        | Black  | 801V605B.L1 | 801V605B.R1 |
| Top pocket connector: POVH 10 mm for 0–6 mm gap                                  |                            |                        |        |             |             |
| Bottom pocket connector: POVH 3 mm for gap from 7–13 mm                          |                            |                        |        |             |             |
| POVH Pocket connector height                                                     |                            |                        |        |             |             |
| Consisting of:                                                                   |                            |                        |        |             |             |
| 4a                                                                               | 2 x                        | Front pocket connector |        |             |             |
| 4b                                                                               | 2 x                        | Rear pocket connector  |        |             |             |


| Pocket connector set                                                               |                                     |                        |        |             |             |
|------------------------------------------------------------------------------------|-------------------------------------|------------------------|--------|-------------|-------------|
| 5                                                                                  | Worktop-mounted cabinet application |                        |        |             |             |
|  | Pocket side thickness (mm)          |                        | Colour | Left        | Right       |
|                                                                                    | 15–19                               |                        | Black  | 801V705B.L3 | 801V705B.R3 |
| Top pocket connector: POVH 10 mm for 0–6 mm gap                                    |                                     |                        |        |             |             |
| Bottom pocket connector: POVH 3 mm for gap from 3–6 mm                             |                                     |                        |        |             |             |
| POVH Pocket connector height                                                       |                                     |                        |        |             |             |
| Consisting of:                                                                     |                                     |                        |        |             |             |
| 5a                                                                                 | 2 x                                 | Front pocket connector |        |             |             |
| 5b                                                                                 | 2 x                                 | Rear pocket connector  |        |             |             |

## Ordering information

| Z Accessories                                                                       |                                                                                                                                                                                     |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Adapter for electrical appliance switch-off</b>                                  |                                                                                                                                                                                     |
|    | 801ZG0BS                                                                                                                                                                            |
|                                                                                     | Suitable exclusively for electrical appliance switch-off with magnetic contact (part number 3623011) from Halemeier GmbH ( <a href="http://www.halemeier.de">www.halemeier.de</a> ) |
|                                                                                     | Liability disclaimer: Blum does not accept any liability for the function of the electrical appliance switch-off                                                                    |
| <b>Consisting of:</b>                                                               |                                                                                                                                                                                     |
| 1 x                                                                                 | Contact switch adapter                                                                                                                                                              |
| 1 x                                                                                 | Ring magnet with catch plate                                                                                                                                                        |
| 4 x                                                                                 | M4x12 countersunk screws for contact switch adapter                                                                                                                                 |
| 2 x                                                                                 | M4x5 round head screws for contact switch adapter                                                                                                                                   |
| <b>Scuff guard</b>                                                                  |                                                                                                                                                                                     |
|    | 801ZA00S                                                                                                                                                                            |
|                                                                                     | For front thicknesses starting from 23 mm<br>For front thicknesses less than 23 mm, the scuff guard can be used as additional front protection                                      |
| <b>Consisting of:</b>                                                               |                                                                                                                                                                                     |
| 3 x                                                                                 | External pocket side scuff guard (POAS)                                                                                                                                             |
| <b>Screws</b>                                                                       |                                                                                                                                                                                     |
|  | 661.1450.HG                                                                                                                                                                         |
|                                                                                     | 6 x 14.5 mm system screws, nickel plated                                                                                                                                            |
|  | 664.3500                                                                                                                                                                            |
|                                                                                     | 4 x 35 mm chipboard screws, nickel plated                                                                                                                                           |
| <b>Pocket connector</b>                                                             |                                                                                                                                                                                     |
|  | 801V5002                                                                                                                                                                            |
|                                                                                     | Rear pocket connector, pocket connector height (POVH) 10 mm                                                                                                                         |
| Additional pocket connector for set-back plinth leg                                 |                                                                                                                                                                                     |
| <b>EXPANDO T – for thin fronts</b>                                                  |                                                                                                                                                                                     |
|  | 70T4532T                                                                                                                                                                            |
|                                                                                     | EXPANDO T – single                                                                                                                                                                  |
| EXPANDO T suitable for thin fronts – see page 81                                    |                                                                                                                                                                                     |
| For front thicknesses less than 18 mm, we recommend a trial application             |                                                                                                                                                                                     |
| Screws are not included in the scope of delivery                                    |                                                                                                                                                                                     |



## Planning

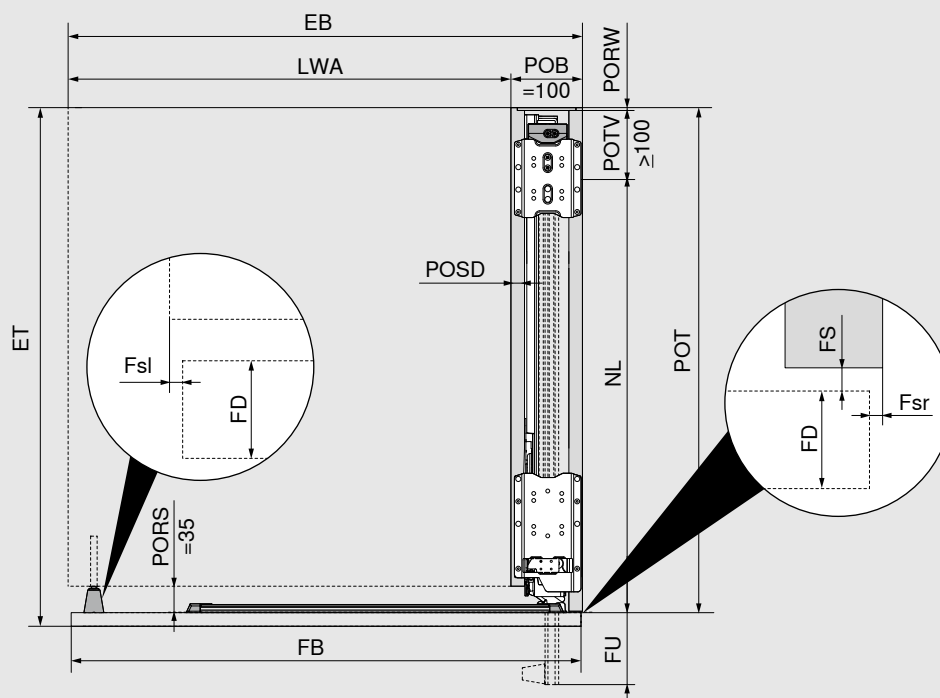

### Installation depth/pocket depth

$$ET = POT + FS (2 \text{ mm}) + FD$$

$$\text{Min. POT} = NL + POTV (\geq 100 \text{ mm}) + PORW (\geq 3 \text{ mm})$$

### Installation width/internal width within the application

$$EB = LWA + POB (100 \text{ mm})$$

$$FB = EB - Fsl - Fsr$$

$$Fsl/Fsr = 1.0\text{--}4.0 \text{ mm}$$

$$\text{Max. NL} = FB + 8 \text{ mm}$$

$$FU = FB - NL + 15 \text{ mm}$$

$$(\text{min. FU} = 7 \text{ mm})$$

$$FD = 18\text{--}26 \text{ mm}$$

- By cutting the profiles to size, the front protrusion (FU) can be customised.
- To ensure optimum functionality, the fronts are at a slight angle inside the pocket.
- A partition side is required for a stand-alone application, or one adjacent to a worktop area.
- The internal width within the application determines the maximum width available for the internal cabinetry.
- For front thicknesses (FD) less than 18 mm (possible depending on material/stability), we recommend a trial application.


|      |                                       |
|------|---------------------------------------|
| EB   | Installation width                    |
| ET   | Installation depth                    |
| Fsl  | Gap left                              |
| Fsr  | Gap right                             |
| FB   | Front width                           |
| FD   | Front thickness                       |
| FS   | Front gap                             |
| FU   | Front protrusion                      |
| LWA  | Internal width within the application |
| NL   | Nominal length                        |
| POB  | Pocket width                          |
| POT  | Pocket depth                          |
| PORS | Pocket back cut                       |
| PORW | Pocket back                           |
| POS  | Pocket side thickness                 |
| POTV | Pocket depth loss                     |



## Planning

### Installation height, front height

#### Application without plinth

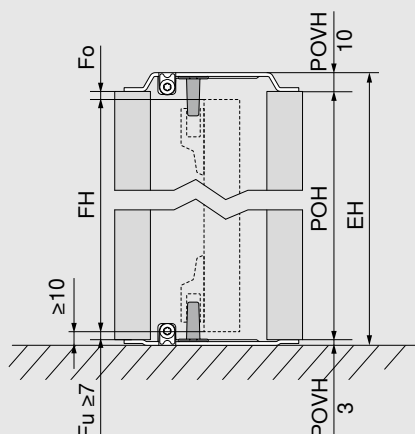

$$FH = POH - Fo - Fu$$

$$EH = POH + POVH \text{ top and bottom}$$

$$POVH \text{ top } 10 \text{ mm: gap } 0-6 \text{ mm}$$

$$POVH \text{ bottom } 3 \text{ mm: gap from } 7-13 \text{ mm}$$

- Take into account that the pocket must be tilted during installation.
- Minimum distance from the bottom front edge to the floor or next element below is 10 mm
- Minimum distance to the next movable element above 3 mm, for non-movable elements a front insertion space of 6 mm must be taken into account
- The pocket connector height must be taken into account during planning

EH Installation height

Fo Top gap

Fu Bottom gap


FH Front height

POH Pocket height

POVH Pocket connector height

### Installation height, front height

#### Worktop-mounted cabinet application

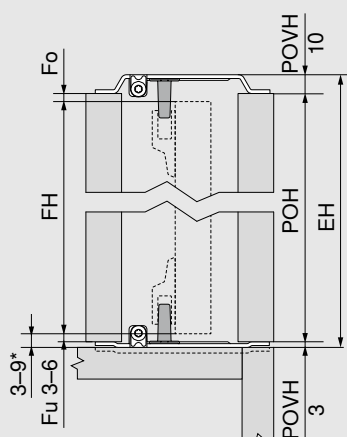

$$FH = POH - Fo - Fu$$

$$EH = POH + POVH \text{ top and bottom}$$

$$POVH \text{ top } 10 \text{ mm: gap } 0-6 \text{ mm}$$

$$POVH \text{ bottom } 3 \text{ mm: gap from } 3-6 \text{ mm}$$

- Take into account that the pocket must be tilted during installation.
- Minimum distance between front and next element below with flush front/worktop is 3 mm
- Minimum distance between front and next element below with protruding front (e.g. protruding worktop) is 6 mm
- The minimum distance to the next movable element above is 3 mm, for non-movable elements a front insertion space of 6 mm must be taken into account
- A trial application is recommended in the edge areas
- The pocket connector height must be taken into account during planning
- The distance between the front and the next element above and below is made up of Fu or Fo + POVH

EH Installation height

Fo Top gap

Fu Bottom gap

FH Front height

POH Pocket height

POVH Pocket connector height

\* If the distance between the front and the next element below is < 6 mm, the pocket connector must be embedded in the worktop

## Planning


### Max. front weights for worktop-mounted cabinets in kg per front

| Front height FH (mm) | Front width FB (mm) |     |     |     |     |     |     |
|----------------------|---------------------|-----|-----|-----|-----|-----|-----|
|                      | 450                 | 500 | 550 | 600 | 650 | 700 | 750 |
| 1130–1349            | 22                  | 20  | 18  | 16  | 15  | 14  | 13  |
| 1350–1499            | 23                  | 21  | 19  | 18  | 17  | 16  | 15  |
| 1500–1649            | 25                  | 23  | 21  | 19  | 18  | 17  | 16  |
| 1650–1803            | 27                  | 25  | 23  | 21  | 20  | 19  | 18  |

### Note

- The max. front width when planning a worktop-mounted cabinet is 750 mm
- The max. pocket height when planning a worktop-mounted cabinet is 1806 mm

### Internal height and internal depth within the application

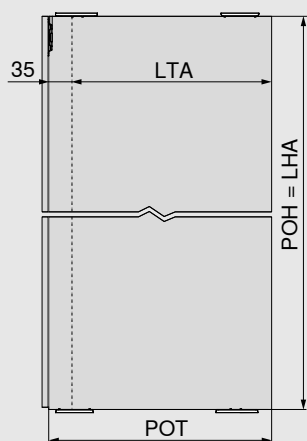

$$LHA = POH$$

$$LTA = POT - 35 \text{ mm}$$

- The internal height/internal depth within the application determines the maximum height/depth available for the internal cabinetry.

LHA Internal height within the application

LTA Internal depth within the application

POH Pocket height

POT Pocket depth

REVEGO uno + uno – single door right and single door left



| Space requirement                               |                                           |                                            |                                           |
|-------------------------------------------------|-------------------------------------------|--------------------------------------------|-------------------------------------------|
| Installation dimensions (mm)                    | Installation width EB                     | Installation height EH                     | Installation depth ET                     |
|                                                 | 900–1800                                  | 1155–3012                                  | from 573                                  |
| Internal dimensions within the application (mm) | Internal width within the application LWA | Internal height within the application LHA | Internal depth within the application LTA |
|                                                 | up to 1600                                | up to 2999                                 | from 518                                  |
| Pocket dimensions (mm)                          | Pocket width POB                          | Pocket height POH                          | Pocket depth POT                          |
|                                                 | 100                                       | 1142–2999                                  | from 553                                  |
| Front dimensions (mm)                           | Front width FB                            | Front height FH                            | Front thickness FD                        |
|                                                 | 442–898                                   | 1130–2980                                  | 18–26                                     |
| Front weight FG                                 | up to 35 kg per front                     |                                            |                                           |

Overview

Fittings selection made easy

It is easy to work out the fittings and drilling positions you need using the Product Configurator.

With every product configuration, you will receive manufacturing drawings, cutting lists for wooden parts and fittings, 3D CAD data for your design software, as well as CAM programs including drilling information for direct machining on your CNC machine, in addition to the checked parts list.

Enter the web code in the Product Configurator, click on the short URL or scan the QR code. Don't have login information for digital services yet? Register here and get access free of charge.

Web code

DQDN1C


Product Configurator  
www.blum.com/rev9

Assembly and adjustment  
www.blum.com/rev5



## Component overview

### Pocket

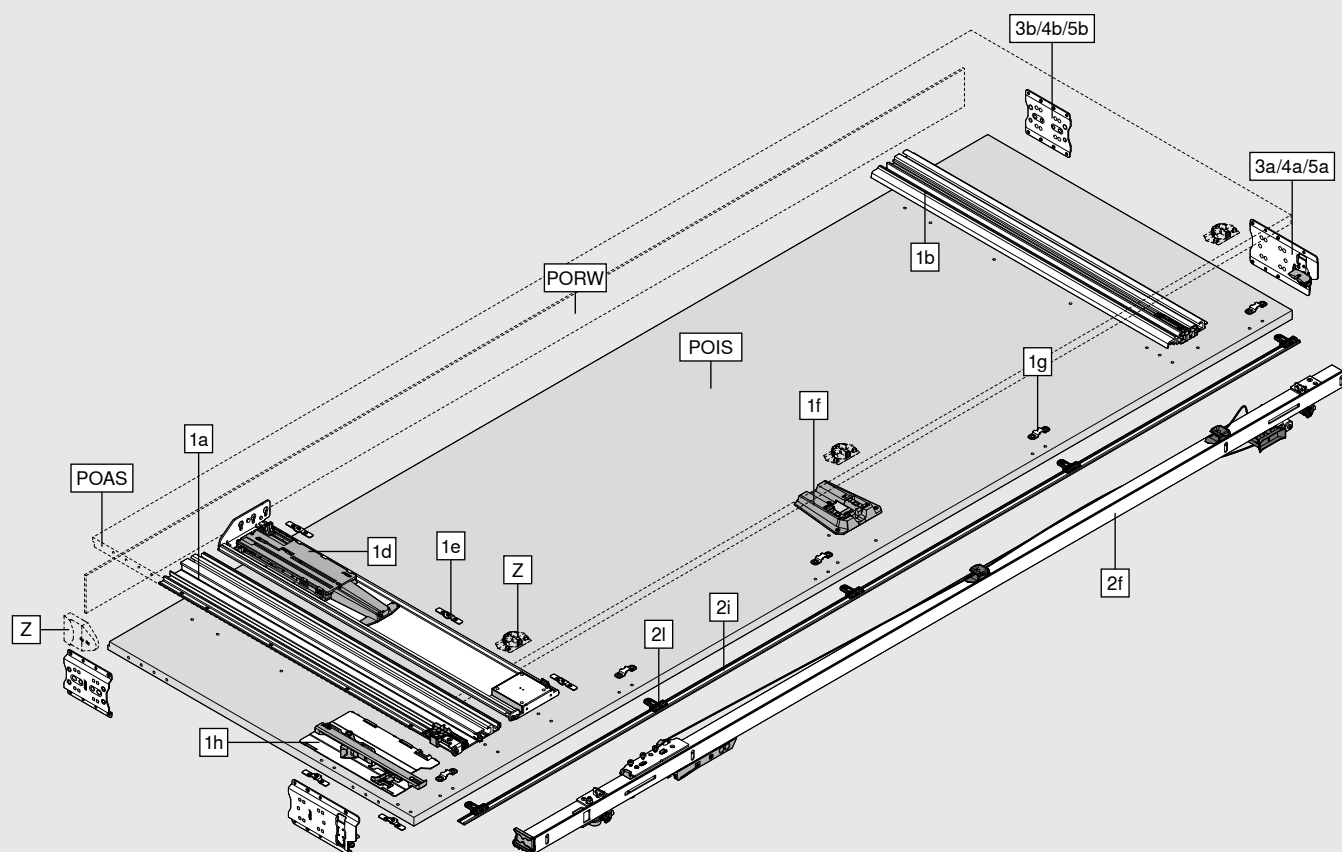


### Consisting of:

|                 |                                                            |
|-----------------|------------------------------------------------------------|
| <b>1a</b>       | Top pocket profile                                         |
| <b>1b</b>       | Bottom pocket profile                                      |
| <b>1d</b>       | TIP-ON unit pocket                                         |
| <b>1e</b>       | Fixing clips                                               |
| <b>1f</b>       | BLUMOTION unit pocket                                      |
| <b>1g</b>       | Attachment for pocket cover strip                          |
| <b>1h</b>       | BLUMATIC unit                                              |
| <b>2f</b>       | Hinge bracket                                              |
| <b>2i</b>       | Pocket cover strip                                         |
| <b>2l</b>       | Mounting for pocket cover strip                            |
| <b>3a/4a/5a</b> | Front pocket connector                                     |
| <b>3b/4b/5b</b> | Rear pocket connector                                      |
| <b>Z</b>        | Adapter for electrical appliance switch-off<br>Scuff guard |
| <b>POAS</b>     | External pocket side                                       |
| <b>POIS</b>     | Internal pocket side                                       |
| <b>PORW</b>     | Pocket back                                                |

## Component overview

### Front

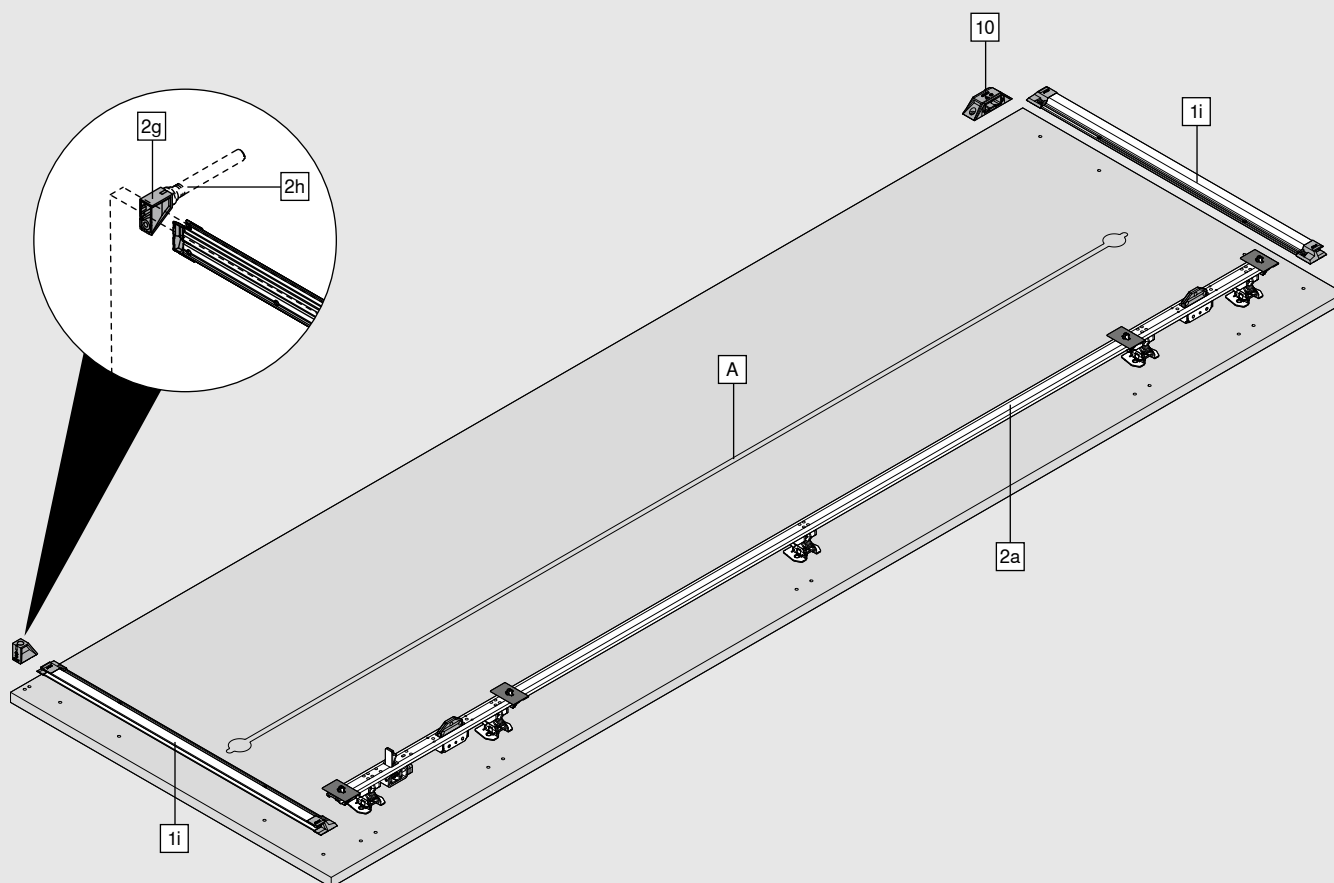

### Consisting of:

|    |                          |
|----|--------------------------|
| 1i | Door stabiliser          |
| 2a | Hinge strip              |
| 2g | TIP-ON spacer            |
| 2h | TIP-ON incl. catch plate |
| 10 | Inter-door support       |

A We recommend at least one alignment fitting with a maximum installation height of 3 mm.  
Alignment fittings with a height of more than 3 mm must not be used in the pocket.

## Ordering information

| 1                                                                                 | Pocket profile set with TIP-ON |                             |             |             |
|-----------------------------------------------------------------------------------|--------------------------------|-----------------------------|-------------|-------------|
|  | Nominal length NL (mm)         | Min. pocket depth POT* (mm) | Left        | Right       |
|                                                                                   | 450                            | 550                         | 801P450E.L3 | 801P450E.R3 |
|                                                                                   | 500                            | 600                         | 801P500E.L3 | 801P500E.R3 |
|                                                                                   | 600                            | 700                         | 801P600E.L3 | 801P600E.R3 |
|                                                                                   | 700                            | 800                         | 801P700E.L3 | 801P700E.R3 |
|                                                                                   | 800                            | 900                         | 801P800E.L3 | 801P800E.R3 |

\* Specification without pocket back. A back construction with a thickness of at least 3 mm is required.  
Pocket profiles and TIP-ON unit pocket can be shortened to any nominal length.

### Consisting of:

|    |     |                                                               |
|----|-----|---------------------------------------------------------------|
| 1a | 1 x | Top pocket profile                                            |
| 1b | 1 x | Bottom pocket profile                                         |
| 1d | 1 x | TIP-ON unit pocket                                            |
| 1e | 5 x | Fixing clips                                                  |
| 1f | 1 x | BLUMOTION unit pocket                                         |
| 1g | 5 x | Attachment for pocket cover strip                             |
| 1h | 1 x | BLUMATIC unit                                                 |
| 1i | 2 x | Door stabiliser: runner profile incl. end cap, black anodised |

Order set for each single door, 1x left and 1x right

| 2                                                                                   | Hinge bracket set  |             |             |
|-------------------------------------------------------------------------------------|--------------------|-------------|-------------|
|  | Pocket height (mm) | Left        | Right       |
|                                                                                     | 1142–1356          | 801T1140.L3 | 801T1140.R3 |
|                                                                                     | 1357–1506          | 801T1350.L3 | 801T1350.R3 |
|                                                                                     | 1507–1656          | 801T1500.L3 | 801T1500.R3 |
|                                                                                     | 1657–1806          | 801T1650.L3 | 801T1650.R3 |
|                                                                                     | 1807–1956          | 801T1800.L3 | 801T1800.R3 |
|                                                                                     | 1957–2106          | 801T1950.L3 | 801T1950.R3 |
|                                                                                     | 2107–2256          | 801T2100.L3 | 801T2100.R3 |
|                                                                                     | 2257–2406          | 801T2250.L3 | 801T2250.R3 |
|                                                                                     | 2407–2556          | 801T2400.L3 | 801T2400.R3 |
|                                                                                     | 2557–2706          | 801T2550.L3 | 801T2550.R3 |
|                                                                                     | 2707–2856          | 801T2700.L3 | 801T2700.R3 |
|                                                                                     | 2857–2999          | 801T2850.L3 | 801T2850.R3 |

Cover strips must be shortened to the required length

### Consisting of:

|    |       |                                                         |
|----|-------|---------------------------------------------------------|
| 2a | 1 x   | Hinge strip, black                                      |
| 2f | 1 x   | Hinge bracket                                           |
| 2g | 1 x   | TIP-ON spacer                                           |
| 2h | 1 x   | TIP-ON incl. catch plate, black                         |
| 2i | 1 x   | Pocket cover strip, black anodised                      |
| 2l | 3–5 x | Mountings for pocket cover strip                        |
| -  | 21 x  | System screws for 1i, 2a, 2g and 10, 6 x 14.5 mm, black |

Order set for each single door, 1x left and 1x right

## Ordering information

| Pocket connector set                                                             |                            |                        |  |          |
|----------------------------------------------------------------------------------|----------------------------|------------------------|--|----------|
| 3                                                                                | Application with plinth    |                        |  |          |
|  | Pocket side thickness (mm) | Colour                 |  |          |
|                                                                                  | 15–19                      | Black                  |  | 801V505B |
|                                                                                  |                            |                        |  |          |
| Pocket connector top + bottom: POVH 10 mm for 0–6 mm gap                         |                            |                        |  |          |
| POVH Pocket connector height                                                     |                            |                        |  |          |
| Consisting of:                                                                   |                            |                        |  |          |
| 3a                                                                               | 2 x                        | Front pocket connector |  |          |
| 3b                                                                               | 2 x                        | Rear pocket connector  |  |          |
| Order 1x per single door                                                         |                            |                        |  |          |

| Pocket connector set                                                              |                            |                        |             |             |
|-----------------------------------------------------------------------------------|----------------------------|------------------------|-------------|-------------|
| 4                                                                                 | Application without plinth |                        |             |             |
|  | Pocket side thickness (mm) | Colour                 | Left        | Right       |
|                                                                                   | 15–19                      | Black                  | 801V605B.L1 | 801V605B.R1 |
|                                                                                   |                            |                        |             |             |
| Top pocket connector: POVH 10 mm for 0–6 mm gap                                   |                            |                        |             |             |
| Bottom pocket connector: POVH 3 mm for gap from 7–13 mm                           |                            |                        |             |             |
| POVH Pocket connector height                                                      |                            |                        |             |             |
| Consisting of:                                                                    |                            |                        |             |             |
| 4a                                                                                | 2 x                        | Front pocket connector |             |             |
| 4b                                                                                | 2 x                        | Rear pocket connector  |             |             |
| Order set for each single door, 1x left and 1x right                              |                            |                        |             |             |

| Pocket connector set                                                                |                                     |                        |             |             |
|-------------------------------------------------------------------------------------|-------------------------------------|------------------------|-------------|-------------|
| 5                                                                                   | Worktop-mounted cabinet application |                        |             |             |
|  | Pocket side thickness (mm)          | Colour                 | Left        | Right       |
|                                                                                     | 15–19                               | Black                  | 801V705B.L3 | 801V705B.R3 |
|                                                                                     |                                     |                        |             |             |
| Top pocket connector: POVH 10 mm for 0–6 mm gap                                     |                                     |                        |             |             |
| Bottom pocket connector: POVH 3 mm for gap from 3–6 mm                              |                                     |                        |             |             |
| POVH Pocket connector height                                                        |                                     |                        |             |             |
| Consisting of:                                                                      |                                     |                        |             |             |
| 5a                                                                                  | 2 x                                 | Front pocket connector |             |             |
| 5b                                                                                  | 2 x                                 | Rear pocket connector  |             |             |
| Order set for each single door, 1x left and 1x right                                |                                     |                        |             |             |


| 10                                                                                  | Assembly set for two single doors combined |  |  |          |
|-------------------------------------------------------------------------------------|--------------------------------------------|--|--|----------|
|  | Colour                                     |  |  |          |
|                                                                                     | Black                                      |  |  | 800ZA02S |
|                                                                                     |                                            |  |  |          |
| Consisting of:                                                                      |                                            |  |  |          |
| 1 x                                                                                 | Inter-door support (right + left)          |  |  |          |

## Ordering information

| Z Accessories                                                                       |                                                                                                                                                                                     |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Adapter for electrical appliance switch-off</b>                                  |                                                                                                                                                                                     |
|    | 801ZG0BS                                                                                                                                                                            |
|                                                                                     | Suitable exclusively for electrical appliance switch-off with magnetic contact (part number 3623011) from Halemeier GmbH ( <a href="http://www.halemeier.de">www.halemeier.de</a> ) |
|                                                                                     | Liability disclaimer: Blum does not accept any liability for the function of the electrical appliance switch-off                                                                    |
| <b>Consisting of:</b>                                                               |                                                                                                                                                                                     |
| 1 x                                                                                 | Contact switch adapter                                                                                                                                                              |
| 1 x                                                                                 | Ring magnet with catch plate                                                                                                                                                        |
| 4 x                                                                                 | M4x12 countersunk screws for contact switch adapter                                                                                                                                 |
| 2 x                                                                                 | M4x5 round head screws for contact switch adapter                                                                                                                                   |
| <b>Scuff guard</b>                                                                  |                                                                                                                                                                                     |
|    | For front thicknesses starting from 23 mm                                                                                                                                           |
|                                                                                     | For front thicknesses less than 23 mm, the scuff guard can be used as additional front protection                                                                                   |
| <b>Consisting of:</b>                                                               |                                                                                                                                                                                     |
| 3 x                                                                                 | External pocket side scuff guard                                                                                                                                                    |
| <b>Screws</b>                                                                       |                                                                                                                                                                                     |
|  | 6 x 14.5 mm system screws, nickel plated                                                                                                                                            |
|                                                                                     | 661.1450.HG                                                                                                                                                                         |
|  | 4 x 35 mm chipboard screws, nickel plated                                                                                                                                           |
|                                                                                     | 664.3500                                                                                                                                                                            |
| <b>Pocket connector</b>                                                             |                                                                                                                                                                                     |
|  | Rear pocket connector, pocket connector height (POVH) 10 mm                                                                                                                         |
|                                                                                     | 801V5002                                                                                                                                                                            |
| Additional pocket connector for set-back plinth leg                                 |                                                                                                                                                                                     |
| <b>EXPANDO T – for thin fronts</b>                                                  |                                                                                                                                                                                     |
|  | EXPANDO T – single                                                                                                                                                                  |
|                                                                                     | 70T4532T                                                                                                                                                                            |
| EXPANDO T suitable for thin fronts – see page 81                                    |                                                                                                                                                                                     |
| For front thicknesses less than 18 mm, we recommend a trial application             |                                                                                                                                                                                     |
| Screws are not included in the scope of delivery                                    |                                                                                                                                                                                     |



## Planning

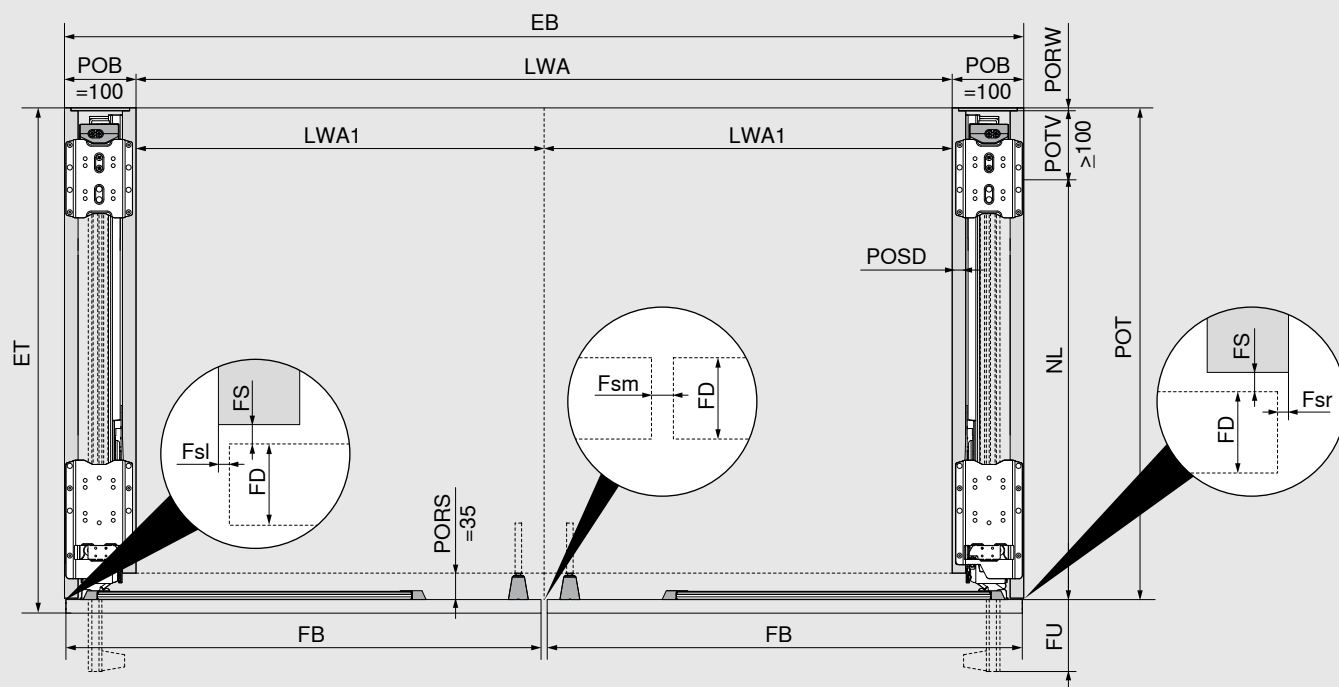

### Installation depth/pocket depth

$$ET = POT + FS (2 \text{ mm}) + FD$$

$$\text{Min. POT} = NL + POTV (\geq 100 \text{ mm}) + PORW (\geq 3 \text{ mm})$$

### Installation width/internal width within the application

$$EB = 2 \times LWA1 + 2 \times POB (100 + 100 \text{ mm})$$

$$FB = EB - Fsl - Fsr$$

$$Fsl/Fsr = 1.0\text{--}4.0 \text{ mm}; Fsm = 2.0\text{--}8.0 \text{ mm}$$

$$FD = 18\text{--}26 \text{ mm}$$

$$\text{Max. NL} = FB + 8 \text{ mm}$$

$$FU = FB - NL + 15 \text{ mm}$$

(min. FU = 7 mm)

$$FD = 18\text{--}26 \text{ mm}$$

- By cutting the profiles to size, the front protrusion (FU) can be customised.
- To ensure optimum functionality, the fronts are at a slight angle inside the pocket.
- A partition side is required for a stand-alone application, or one adjacent to a worktop area.
- The internal width within the application determines the maximum width available for the internal cabinetry.
- For front thicknesses (FD) less than 18 mm (possible depending on material/stability), we recommend a trial application.

EB Installation width

ET Installation depth

Fsl Gap left

Fsr Gap right

Fsm Centre side gap  
(between the fronts)

FB Front width

FD Front thickness

FS Front gap

FU Front protrusion

LWA Internal width within the application

LWA1 Internal width within the application,  
single door

NL Nominal length

POB Pocket width

POT Pocket depth

PORS Pocket back cut

PORW Pocket back


POSD Pocket side thickness

POTV Pocket depth loss


## Planning

### Minimum side gap

#### Pocket to pocket/adjacent cabinet

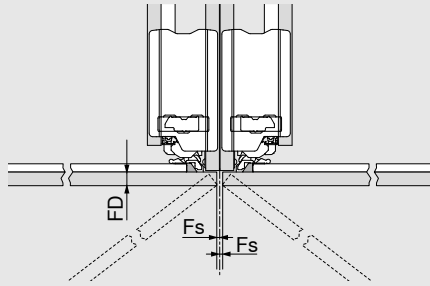

#### Pocket to wall/decor panel

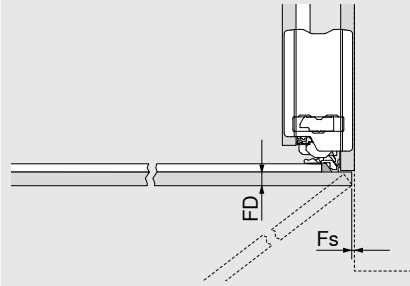

#### FD (mm)

#### Min. Fs (mm)

18 –20

2

20.1–23

2.5

23.1–26

3


For free-standing applications,  
Fs must be minimum 1 mm

FD Front thickness

Fs Side gap

### Installation height, front height

#### Application with plinth

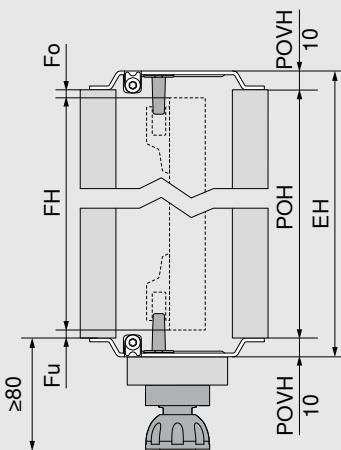

$$FH = POH - Fo - Fu$$

$$EH = POH + POVH \text{ top and bottom}$$

POVH 10 mm: gap 0–6 mm

- Take into account that the pocket must be tilted during installation.
- Minimum distance to the next movable element above 3 mm, for non-movable elements a front insertion space of 6 mm must be taken into account
- The pocket connector height must be taken into account during planning
- Minimum plinth height 80 mm

EH Installation height

Fo Top gap

Fu Bottom gap


FH Front height

POH Pocket height

POVH Pocket connector height

### Application with set-back plinth


#### Additional rear pocket connector

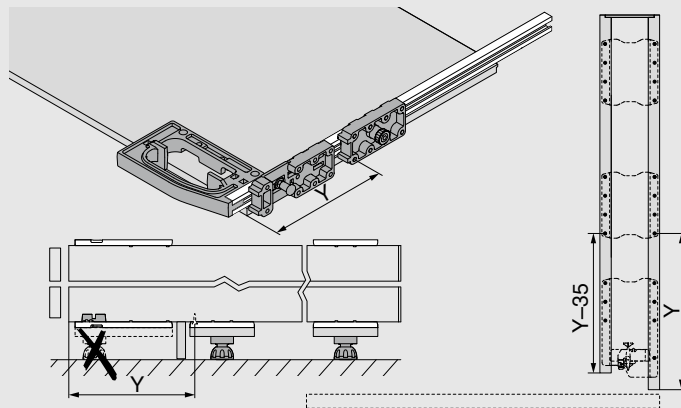

## Planning

### Installation height, front height

#### Application without plinth

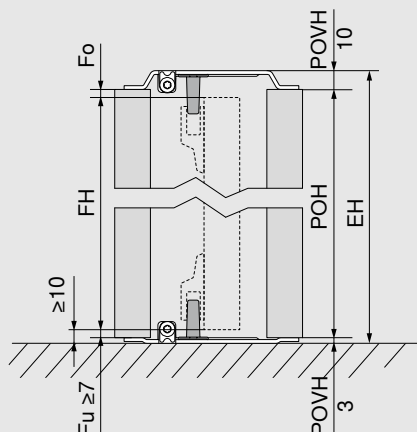

$$FH = POH - Fo - Fu$$

$$EH = POH + POVH \text{ top and bottom}$$

POVH top 10 mm: gap 0–6 mm

POVH bottom 3 mm: gap from 7–13 mm

- Take into account that the pocket must be tilted during installation.
- Minimum distance from the bottom front edge to the floor or next element below is 10 mm
- Minimum distance to the next movable element above 3 mm, for non-movable elements a front insertion space of 6 mm must be taken into account
- The pocket connector height must be taken into account during planning

EH Installation height

Fo Top gap

Fu Bottom gap


FH Front height

POH Pocket height

POVH Pocket connector height

### Installation height, front height

#### Worktop-mounted cabinet application

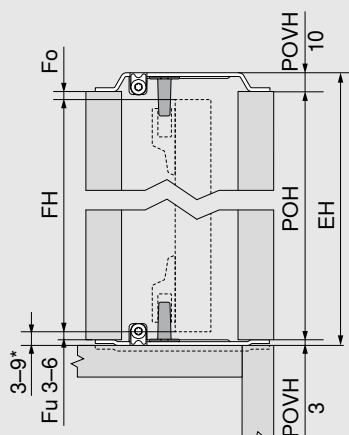

$$FH = POH - Fo - Fu$$

$$EH = POH + POVH \text{ top and bottom}$$

POVH top 10 mm: gap 0–6 mm

POVH bottom 3 mm: gap from 3–6 mm

- Take into account that the pocket must be tilted during installation.
- Minimum distance between front and next element below with flush front/worktop is 3 mm
- Minimum distance between front and next element below with protruding front (e.g. protruding worktop) is 6 mm
- The minimum distance to the next movable element above is 3 mm, for non-movable elements a front insertion space of 6 mm must be taken into account
- A trial application is recommended in the edge areas
- The pocket connector height must be taken into account during planning
- The distance between the front and the next element above and below is made up of Fu or Fo + POVH

EH Installation height

Fo Top gap

Fu Bottom gap

FH Front height

POH Pocket height

POVH Pocket connector height

\* If the distance between the front and the next element below is < 6 mm, the pocket connector must be embedded in the worktop

## Planning


### Max. front weights for worktop-mounted cabinets in kg per front

| Front height FH (mm) | Front width FB (mm) |     |     |     |     |     |     |
|----------------------|---------------------|-----|-----|-----|-----|-----|-----|
|                      | 450                 | 500 | 550 | 600 | 650 | 700 | 750 |
| 1130–1349            | 22                  | 20  | 18  | 16  | 15  | 14  | 13  |
| 1350–1499            | 23                  | 21  | 19  | 18  | 17  | 16  | 15  |
| 1500–1649            | 25                  | 23  | 21  | 19  | 18  | 17  | 16  |
| 1650–1803            | 27                  | 25  | 23  | 21  | 20  | 19  | 18  |

### Note

- The max. front width when planning a worktop-mounted cabinet is 750 mm
- The max. pocket height when planning a worktop-mounted cabinet is 1806 mm

### Internal height and internal depth within the application

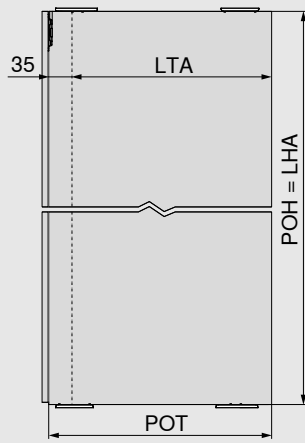

$$LHA = POH$$

$$LTA = POT - 35 \text{ mm}$$

- The internal height/internal depth within the application determines the maximum height/depth available for the internal cabinetry.


LHA Internal height within the application

LTA Internal depth within the application

POH Pocket height

POT Pocket depth

### Inter-door support

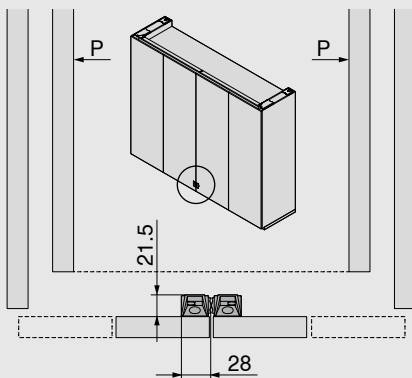

- Supports a single door against a double door, two single doors against each other or two double doors against each other

P Pocket

REVEGO duo – double door right or left



| Space requirement                               |                                           |                                            |                                           |
|-------------------------------------------------|-------------------------------------------|--------------------------------------------|-------------------------------------------|
| Installation dimensions (mm)                    | Installation width EB                     | Installation height EH                     | Installation depth ET                     |
|                                                 | 900–1500                                  | 1155–3012                                  | from 573                                  |
| Internal dimensions within the application (mm) | Internal width within the application LWA | Internal height within the application LHA | Internal depth within the application LTA |
|                                                 | up to 1350                                | up to 2884                                 | from 483                                  |
| Pocket dimensions (mm)                          | Pocket width POB                          | Pocket height POH                          | Pocket depth POT                          |
|                                                 | 150                                       | 1142–2999                                  | from 553                                  |
| Front dimensions (mm)                           | Front width FB                            | Front height FH                            | Front thickness FD                        |
|                                                 | 442–748                                   | 1130–2980                                  | 18–26                                     |
| Front weight FG                                 | up to 35 kg per front                     |                                            |                                           |

Overview

Fittings selection made easy

It is easy to work out the fittings and drilling positions you need using the Product Configurator.

With every product configuration, you will receive manufacturing drawings, cutting lists for wooden parts and fittings, 3D CAD data for your design software, as well as CAM programs including drilling information for direct machining on your CNC machine, in addition to the checked parts list.

Enter the web code in the Product Configurator, click on the short URL or scan the QR code. Don't have login information for digital services yet? Register here and get access free of charge.

Web code


DQITIM

Product Configurator  
www.blum.com/rev10

Assembly and adjustment  
www.blum.com/rev6

## Component overview

### Pocket

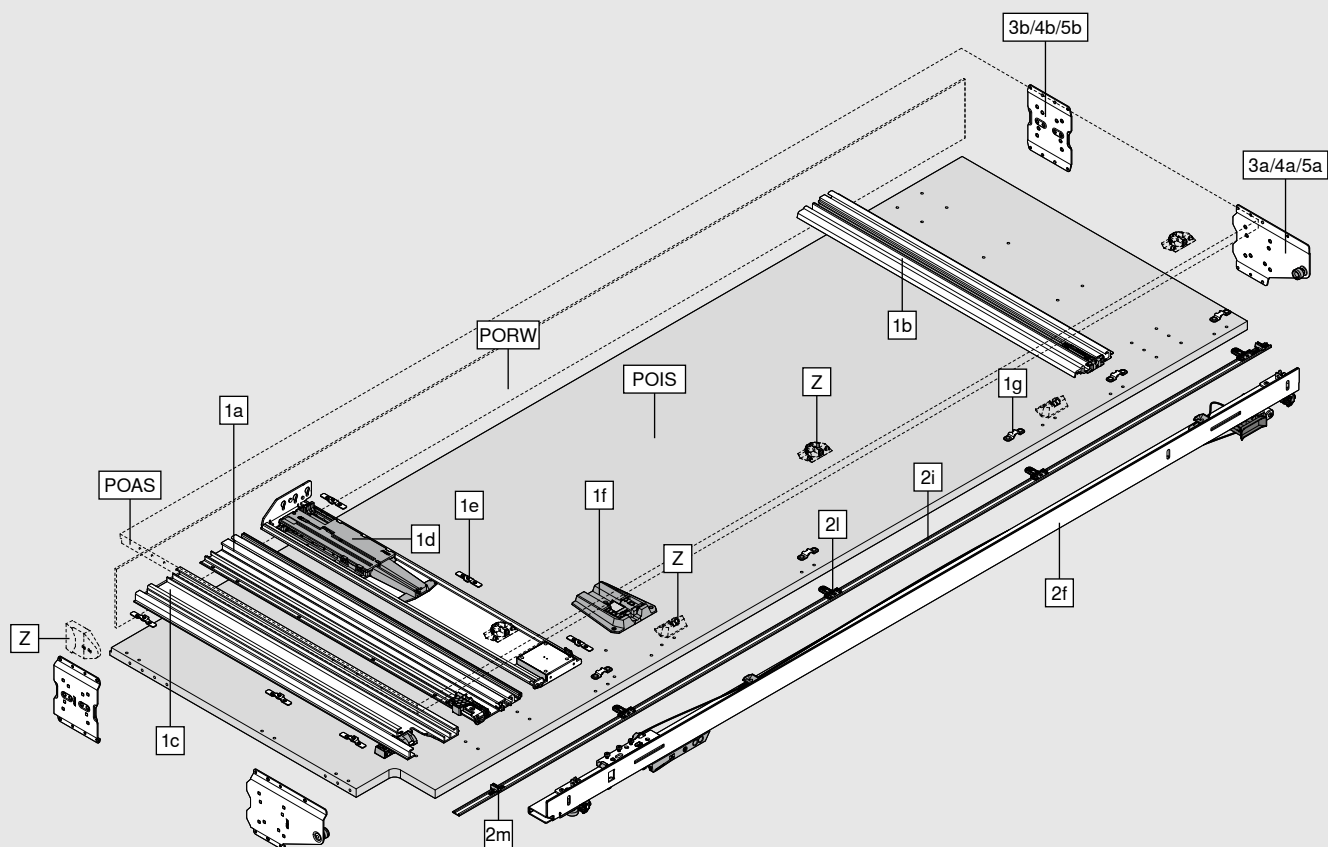


### Consisting of:

|                 |                                                            |
|-----------------|------------------------------------------------------------|
| <b>1a</b>       | Top pocket profile                                         |
| <b>1b</b>       | Bottom pocket profile                                      |
| <b>1c</b>       | Roller profile                                             |
| <b>1d</b>       | TIP-ON unit pocket                                         |
| <b>1e</b>       | Fixing clips                                               |
| <b>1f</b>       | BLUMOTION unit pocket                                      |
| <b>1g</b>       | Attachment for pocket cover strip                          |
| <b>2f</b>       | Hinge bracket                                              |
| <b>2i</b>       | Pocket cover strip                                         |
| <b>2l</b>       | Mounting for pocket cover strip                            |
| <b>2m</b>       | Pocket cover strip support                                 |
| <b>3a/4a/5a</b> | Front pocket connector                                     |
| <b>3b/4b/5b</b> | Rear pocket connector                                      |
| <b>Z</b>        | Adapter for electrical appliance switch-off<br>Scuff guard |
| <b>POAS</b>     | External pocket side                                       |
| <b>POIS</b>     | Internal pocket side                                       |
| <b>PORW</b>     | Pocket back                                                |



## Component overview

### Front

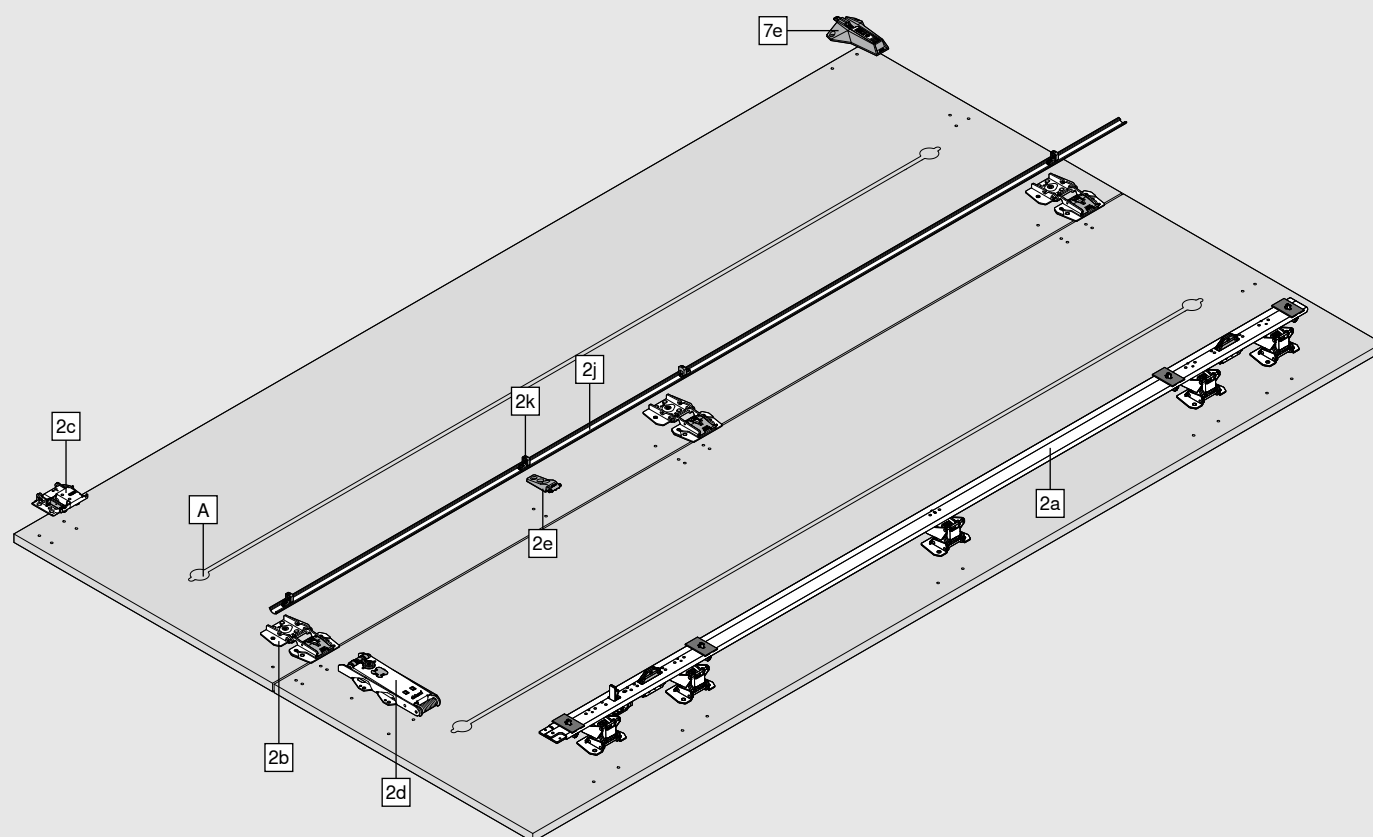


#### Consisting of:

|    |                                           |
|----|-------------------------------------------|
| 2a | Hinge strip                               |
| 2b | Centre hinge                              |
| 2c | Roller carriage hinge                     |
| 2d | TIP-ON unit door                          |
| 2e | Support for door cover strip              |
| 2j | Door cover strip                          |
| 2k | Mounting for door cover strip             |
| 7e | Door support for decor panel/cabinet side |

A We recommend at least one alignment fitting per front with a maximum installation height of 20 mm.  
The space available between the pair of folding fronts is 20 mm.

## Component overview

### Track

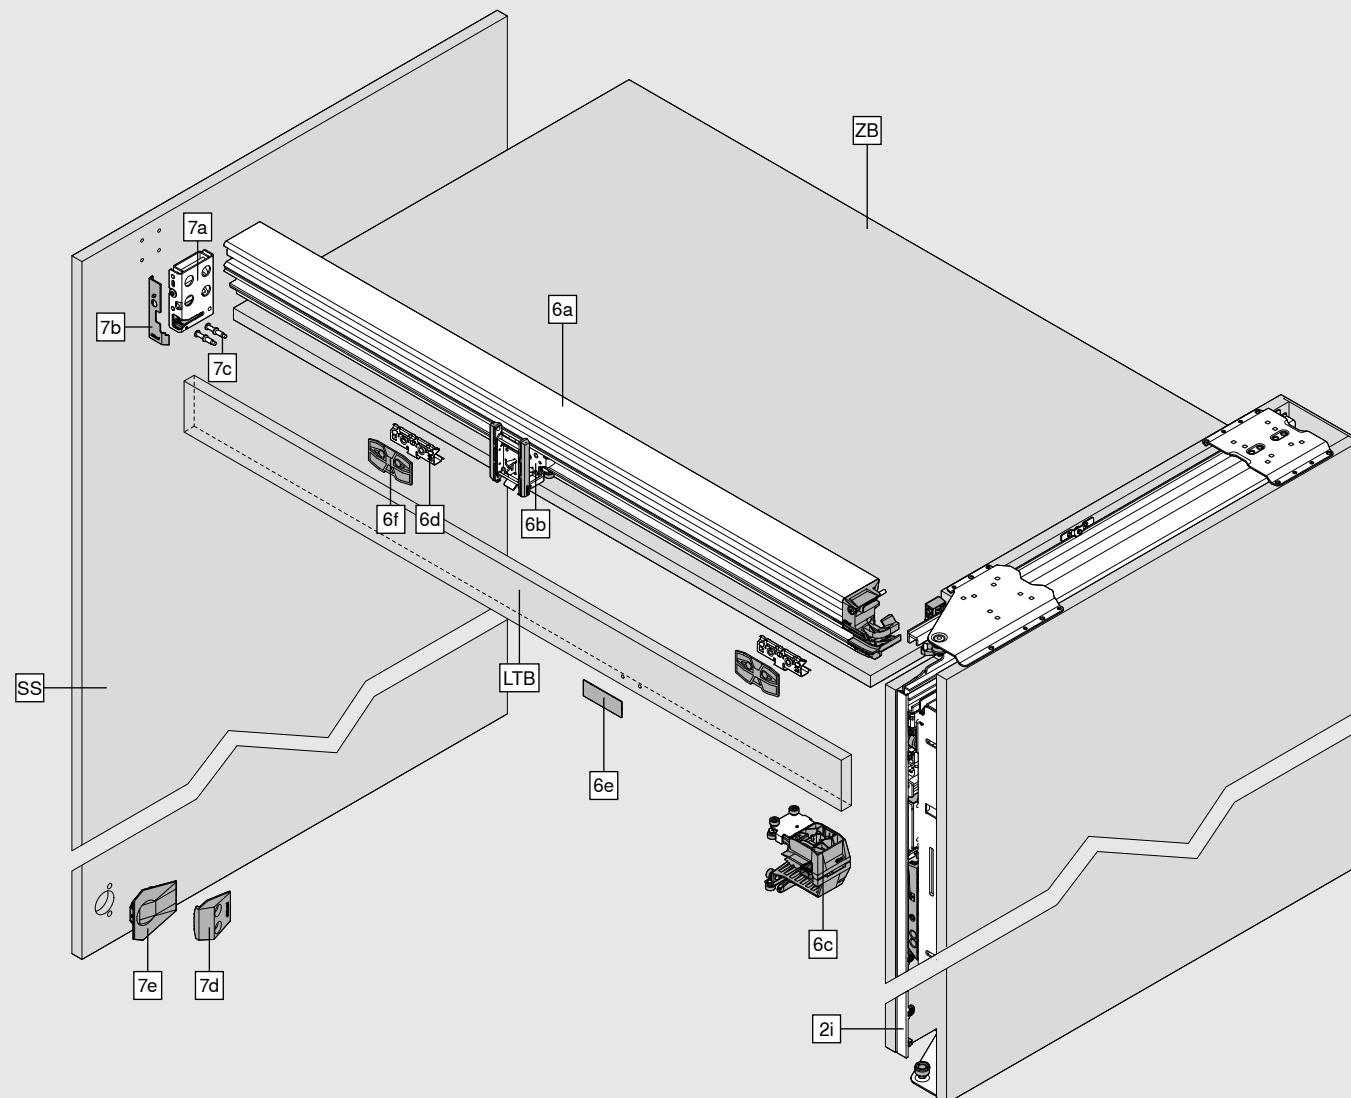

### Consisting of:

|     |                                           |
|-----|-------------------------------------------|
| 2i  | Pocket cover strip                        |
| 6a  | Track                                     |
| 6b  | Roller carriage                           |
| 6c  | Roller carriage transporter               |
| 6d  | Mounting for track cover panel            |
| 6e  | Catch plate                               |
| 6f  | Spacer                                    |
| 7a  | Track fixing                              |
| 7b  | Cover for track fixing                    |
| 7c  | Pin for track fixing                      |
| 7d  | Door support on partition side            |
| 7e  | Door support for decor panel/cabinet side |
| SS  | Optional partition side                   |
| ZB  | Fixed shelf                               |
| LTB | Track cover panel                         |

## Ordering information

| 1                                                                                 | Pocket profile set with TIP-ON |                             |             |             |
|-----------------------------------------------------------------------------------|--------------------------------|-----------------------------|-------------|-------------|
|  | Nominal length NL (mm)         | Min. pocket depth POT* (mm) | Left        | Right       |
|                                                                                   | 450                            | 550                         | 802P450D.L3 | 802P450D.R3 |
|                                                                                   | 525                            | 625                         | 802P525D.L3 | 802P525D.R3 |
|                                                                                   | 600                            | 700                         | 802P600D.L3 | 802P600D.R3 |
|                                                                                   | 675                            | 775                         | 802P675D.L3 | 802P675D.R3 |
|                                                                                   | 750                            | 850                         | 802P750D.L3 | 802P750D.R3 |

\* Specification without pocket back. A back construction with a thickness of at least 3 mm is required.  
Pocket and roller profiles as well as TIP-ON unit pocket can be shortened to any nominal length.

### Consisting of:

|    |     |                                   |
|----|-----|-----------------------------------|
| 1a | 1 x | Top pocket profile                |
| 1b | 1 x | Bottom pocket profile             |
| 1c | 1 x | Roller profile                    |
| 1d | 1 x | TIP-ON unit pocket                |
| 1e | 6 x | Fixing clips                      |
| 1f | 1 x | BLUMOTION unit pocket             |
| 1g | 5 x | Attachment for pocket cover strip |

| 2                                                                                   | Hinge bracket set with TIP-ON |             |             |
|-------------------------------------------------------------------------------------|-------------------------------|-------------|-------------|
|  | Pocket height (mm)            | Left        | Right       |
|                                                                                     | 1142–1356                     | 802T1140.L3 | 802T1140.R3 |
|                                                                                     | 1357–1506                     | 802T1350.L3 | 802T1350.R3 |
|                                                                                     | 1507–1656                     | 802T1500.L3 | 802T1500.R3 |
|                                                                                     | 1657–1806                     | 802T1650.L3 | 802T1650.R3 |
|                                                                                     | 1807–1956                     | 802T1800.L3 | 802T1800.R3 |
|                                                                                     | 1957–2106                     | 802T1950.L3 | 802T1950.R3 |
|                                                                                     | 2107–2256                     | 802T2100.L3 | 802T2100.R3 |
|                                                                                     | 2257–2406                     | 802T2250.L3 | 802T2250.R3 |
|                                                                                     | 2407–2556                     | 802T2400.L3 | 802T2400.R3 |
|                                                                                     | 2557–2706                     | 802T2550.L3 | 802T2550.R3 |
|                                                                                     | 2707–2856                     | 802T2700.L3 | 802T2700.R3 |
|                                                                                     | 2857–2999                     | 802T2850.L3 | 802T2850.R3 |

Cover strips must be shortened to the required length

### Consisting of:

|    |       |                                    |
|----|-------|------------------------------------|
| 2a | 1 x   | Hinge strip                        |
| 2b | 3 x   | Centre hinge                       |
| 2c | 1 x   | Roller carriage hinge              |
| 2d | 1 x   | TIP-ON unit door                   |
| 2e | 1 x   | Support for door cover strip       |
| 2f | 1 x   | Hinge bracket                      |
| 2i | 1 x   | Pocket cover strip, black anodised |
| 2j | 1 x   | Door cover strip, black anodised   |
| 2k | 4 x   | Mounting for door cover strip      |
| 2l | 2–4 x | Mountings for pocket cover strip   |
| 2m | 1 x   | Pocket cover strip support         |

## Ordering information

| Pocket connector set                                                              |                            |                        |        |          |
|-----------------------------------------------------------------------------------|----------------------------|------------------------|--------|----------|
| 3                                                                                 | Application with plinth    |                        |        |          |
|  | Pocket side thickness (mm) |                        | Colour |          |
|                                                                                   | 15–17                      |                        | Black  | 802V560B |
|                                                                                   | 18–19                      |                        | Black  | 802V580B |
| Pocket connector top + bottom: POVH 10 mm for 0–6 mm gap                          |                            |                        |        |          |
| POVH Pocket connector height                                                      |                            |                        |        |          |
| Consisting of:                                                                    |                            |                        |        |          |
| 3a                                                                                | 2 x                        | Front pocket connector |        |          |
| 3b                                                                                | 2 x                        | Rear pocket connector  |        |          |

| Pocket connector set                                                              |                            |                        |        |             |             |
|-----------------------------------------------------------------------------------|----------------------------|------------------------|--------|-------------|-------------|
| 4                                                                                 | Application without plinth |                        |        |             |             |
|  | Pocket side thickness (mm) |                        | Colour | Left        | Right       |
|                                                                                   | 15–17                      |                        | Black  | 802V660B.L1 | 802V660B.R1 |
|                                                                                   | 18–19                      |                        | Black  | 802V680B.L1 | 802V680B.R1 |
| Top pocket connector: POVH 10 mm for 0–6 mm gap                                   |                            |                        |        |             |             |
| Bottom pocket connector: POVH 3 mm for gap from 7–13 mm                           |                            |                        |        |             |             |
| POVH Pocket connector height                                                      |                            |                        |        |             |             |
| Consisting of:                                                                    |                            |                        |        |             |             |
| 4a                                                                                | 2 x                        | Front pocket connector |        |             |             |
| 4b                                                                                | 2 x                        | Rear pocket connector  |        |             |             |


| Pocket connector set                                                                |                                     |                        |        |             |             |
|-------------------------------------------------------------------------------------|-------------------------------------|------------------------|--------|-------------|-------------|
| 5                                                                                   | Worktop-mounted cabinet application |                        |        |             |             |
|  | Pocket side thickness (mm)          |                        | Colour | Left        | Right       |
|                                                                                     | 15–17                               |                        | Black  | 802V760B.L3 | 802V760B.R3 |
|                                                                                     | 18–19                               |                        | Black  | 802V780B.L3 | 802V780B.R3 |
| Top pocket connector: POVH 10 mm for 0–6 mm gap                                     |                                     |                        |        |             |             |
| Bottom pocket connector: POVH 3 mm for gap from 3–6 mm                              |                                     |                        |        |             |             |
| POVH Pocket connector height                                                        |                                     |                        |        |             |             |
| Consisting of:                                                                      |                                     |                        |        |             |             |
| 5a                                                                                  | 2 x                                 | Front pocket connector |        |             |             |
| 5b                                                                                  | 2 x                                 | Rear pocket connector  |        |             |             |

| 6                                                                                  | Track set            |                                 |                |             |             |
|------------------------------------------------------------------------------------|----------------------|---------------------------------|----------------|-------------|-------------|
|  | LWA double door (mm) |                                 | Colour         | Left        | Right       |
|                                                                                    | 1050                 |                                 | Black anodised | 802L1050DL3 | 802L1050DR3 |
|                                                                                    | 1200                 |                                 | Black anodised | 802L1200DL3 | 802L1200DR3 |
|                                                                                    | 1250                 |                                 | Black anodised | 802L1250DL3 | 802L1250DR3 |
|                                                                                    | 1350                 |                                 | Black anodised | 802L1350DL3 | 802L1350DR3 |
| Track can be shortened to any length.                                              |                      |                                 |                |             |             |
| LWA Internal width within the application                                          |                      |                                 |                |             |             |
| Consisting of:                                                                     |                      |                                 |                |             |             |
| 6a                                                                                 | 1 x                  | Track                           |                |             |             |
| 6b                                                                                 | 1 x                  | Roller carriage                 |                |             |             |
| 6c                                                                                 | 1 x                  | Roller carriage transporter     |                |             |             |
| 6d                                                                                 | 2 x                  | Mounting for track cover panels |                |             |             |
| 6e                                                                                 | 1 x                  | Catch plate, black              |                |             |             |
| 6f                                                                                 | 2 x                  | Spacer                          |                |             |             |

## Ordering information

|                                                                                     |                                                                                                                                             |                                                                                                                  |             |             |
|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|-------------|-------------|
| 7                                                                                   | Assembly set for one double door                                                                                                            |                                                                                                                  |             |             |
|    | Colour                                                                                                                                      |                                                                                                                  | Left        | Right       |
|                                                                                     | Black                                                                                                                                       |                                                                                                                  | 802M0002.L2 | 802M0002.R2 |
| Consisting of:                                                                      |                                                                                                                                             |                                                                                                                  |             |             |
| 7a                                                                                  | 1 x                                                                                                                                         | Track fixing                                                                                                     |             |             |
| 7b                                                                                  | 1 x                                                                                                                                         | Cover for track fixing                                                                                           |             |             |
| 7c                                                                                  | 2 x                                                                                                                                         | Pin for track fixing                                                                                             |             |             |
| 7d                                                                                  | 1 x                                                                                                                                         | Door support on partition side (can be selected depending on installation situation)                             |             |             |
| 7e                                                                                  | 1 x                                                                                                                                         | Door support for decor panel/cabinet side incl. attachment (can be selected depending on installation situation) |             |             |
| Z                                                                                   | Accessories                                                                                                                                 |                                                                                                                  |             |             |
| Adapter for electrical appliance switch-off                                         |                                                                                                                                             |                                                                                                                  |             |             |
|    |                                                                                                                                             |                                                                                                                  |             | 802ZG0CS    |
|                                                                                     | Suitable exclusively for electrical appliance switch-off with magnetic contact (part number 3623011) from Halemeier GmbH (www.halemeier.de) |                                                                                                                  |             |             |
|                                                                                     | Liability disclaimer: Blum does not accept any liability for the function of the electrical appliance switch-off                            |                                                                                                                  |             |             |
| Consisting of:                                                                      |                                                                                                                                             |                                                                                                                  |             |             |
| 1 x                                                                                 | Contact switch adapter                                                                                                                      |                                                                                                                  |             |             |
| 1 x                                                                                 | Ring magnet with catch plate                                                                                                                |                                                                                                                  |             |             |
| 4 x                                                                                 | M4x12 countersunk screws for contact switch adapter                                                                                         |                                                                                                                  |             |             |
| 2 x                                                                                 | M4x5 round head screws for contact switch adapter                                                                                           |                                                                                                                  |             |             |
| Scuff guard                                                                         |                                                                                                                                             |                                                                                                                  |             |             |
|  | For front thicknesses starting from 23 mm                                                                                                   |                                                                                                                  |             | 802ZA00S    |
|                                                                                     | For front thicknesses less than 23 mm, the scuff guard can be used as additional front protection                                           |                                                                                                                  |             |             |
| Consisting of:                                                                      |                                                                                                                                             |                                                                                                                  |             |             |
| 3 x                                                                                 | External pocket side scuff guard                                                                                                            |                                                                                                                  |             |             |
| 2 x                                                                                 | Internal pocket side scuff guard                                                                                                            |                                                                                                                  |             |             |
| Screws                                                                              |                                                                                                                                             |                                                                                                                  |             |             |
|  | 6 x 14.5 mm system screws, nickel plated                                                                                                    |                                                                                                                  |             | 661.1450.HG |
|                                                                                     | 4 x 35 mm chipboard screws, nickel plated                                                                                                   |                                                                                                                  |             | 664.3500    |
| Pocket connector                                                                    |                                                                                                                                             |                                                                                                                  |             |             |
|  | Rear pocket connector, pocket connector height (POVH) 10 mm                                                                                 |                                                                                                                  |             | 802V5002    |
|                                                                                     | Additional pocket connector for set-back plinth leg                                                                                         |                                                                                                                  |             |             |
| EXPANDO T – for thin fronts                                                         |                                                                                                                                             |                                                                                                                  |             |             |
|  | EXPANDO T – single                                                                                                                          |                                                                                                                  |             | 70T4532T    |
|                                                                                     | EXPANDO T suitable for thin fronts – see page 81                                                                                            |                                                                                                                  |             |             |
| For front thicknesses less than 18 mm, we recommend a trial application             |                                                                                                                                             |                                                                                                                  |             |             |
| Screws are not included in the scope of delivery                                    |                                                                                                                                             |                                                                                                                  |             |             |

## Planning

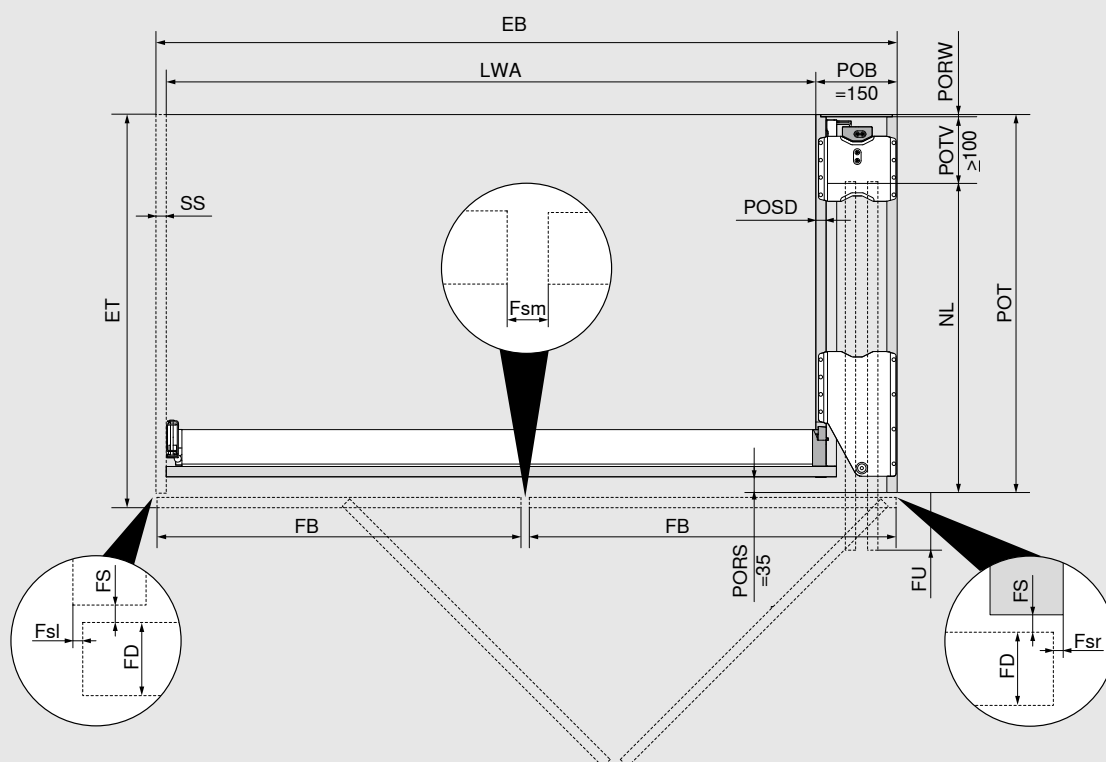

### Installation width/internal width within the application

Without partition side:  $EB = LWA + POB$  (150 mm)

With partition side:  $EB = LWA + POB$  (150 mm) + SS

### Front width/front protrusion

$FB = (EB - Fsl - Fsm - Fsr) : 2$  (fronts)

$Fsl/Fsr = 1.0\text{--}4.0$  mm;  $Fsm = 2.0\text{--}8.0$  mm

Max.  $NL = FB + 8$  mm

$FU = FB - NL + 15$  mm  
(min.  $FU = 7$  mm)

### Installation depth/pocket depth

$ET = POT + FS$  (2 mm) + FD

$FD = 18\text{--}26$  mm

Min.  $POT = NL + POTV$  ( $\geq 100$  mm) +  $PORW$  ( $\geq 3$  mm)

$POSD = 15\text{--}19$  mm

- By cutting the profiles to size, the front protrusion (FU) can be customised.
- To ensure optimum functionality, the fronts are at a slight angle inside the pocket.
- The internal width within the application determines the maximum width available for the internal cabinetry.
- For front thicknesses (FD) less than 18 mm (possible depending on material/stability), we recommend a trial application.


|      |                                         |
|------|-----------------------------------------|
| EB   | Installation width                      |
| ET   | Installation depth                      |
| Fsl  | Gap left                                |
| Fsr  | Gap right                               |
| Fsm  | Centre side gap<br>(between the fronts) |
| FB   | Front width                             |
| FD   | Front thickness                         |
| FS   | Front gap                               |
| FU   | Front protrusion                        |
| LWA  | Internal width within the application   |
| NL   | Nominal length                          |
| POB  | Pocket width                            |
| POT  | Pocket depth                            |
| PORS | Pocket back cut                         |
| PORW | Pocket back                             |
| POSD | Pocket side thickness                   |
| POTV | Pocket depth loss                       |
| SS   | Partition side (optional)               |




## Planning

### Minimum side gap

#### Pocket to pocket/adjacent cabinet

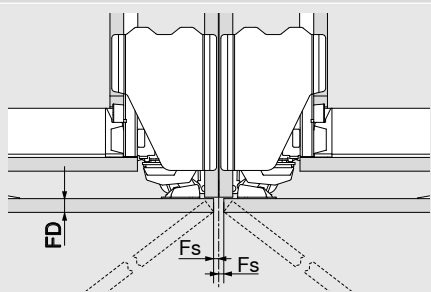

#### Pocket to wall/decor panel

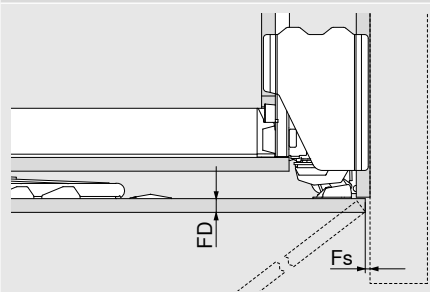

#### FD (mm)

#### Min. Fs (mm)

18 –20

2

20.1–23

2.5

23.1–26

3


For free-standing applications,  
Fs must be minimum 1 mm

FD Front thickness

Fs Side gap

### Installation height, front height

#### Application with plinth

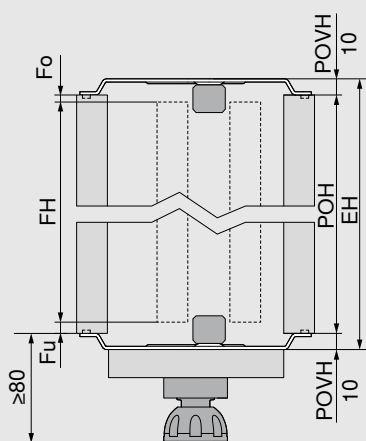

$$FH = POH - Fo - Fu$$

$$EH = POH + POVH \text{ top and bottom}$$

POVH 10 mm: gap 0–6 mm

- Take into account that the pocket must be tilted during installation.
- Minimum distance to the next movable element above 3 mm, for non-movable elements a front insertion space of 6 mm must be taken into account
- The pocket connector height must be taken into account during planning
- Minimum plinth height 80 mm

EH Installation height

Fo Top gap

Fu Bottom gap


FH Front height

POH Pocket height

POVH Pocket connector height

### Application with set-back plinth


#### Additional rear pocket connector

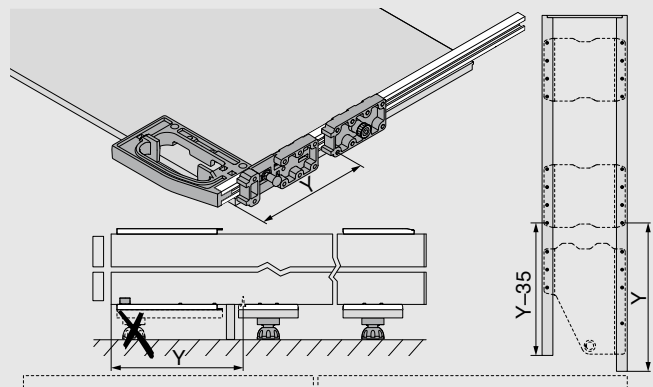

## Planning

### Installation height, front height

#### Application without plinth

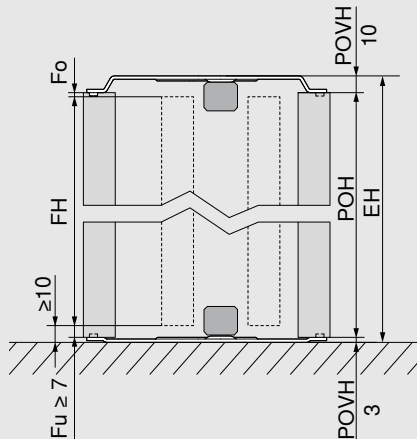

$$FH = POH - Fo - Fu$$

$$EH = POH + POVH \text{ top and bottom}$$

POVH top 10 mm: gap 0–6 mm

POVH bottom 3 mm: gap from 7–13 mm

- Take into account that the pocket must be tilted during installation.
- Minimum distance from the bottom front edge to the floor or next element below is 10 mm
- Minimum distance to the next movable element above 3 mm, for non-movable elements a front insertion space of 6 mm must be taken into account
- The pocket connector height must be taken into account during planning

EH Installation height

Fo Top gap

Fu Bottom gap


FH Front height

POH Pocket height

POVH Pocket connector height

### Installation height, front height

#### Worktop-mounted cabinet application

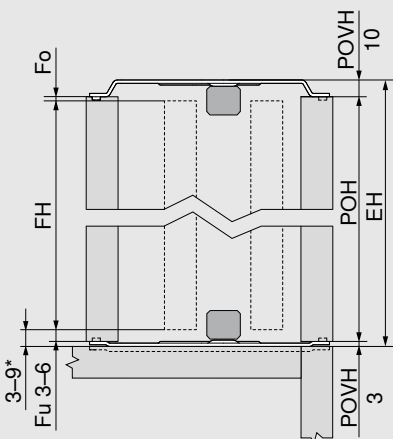

$$FH = POH - Fo - Fu$$

$$EH = POH + POVH \text{ top and bottom}$$

POVH top 10 mm: gap 0–6 mm

POVH bottom 3 mm: gap from 3–6 mm

- Take into account that the pocket must be tilted during installation.
- Minimum distance between front and next element below with flush front/worktop is 3 mm
- Minimum distance between front and next element below with protruding front (e.g. protruding worktop) is 6 mm
- Minimum distance to the next movable element above 3 mm, for non-movable elements a front insertion space of 6 mm must be taken into account
- A trial application is recommended in the edge areas
- The pocket connector height must be taken into account during planning
- The distance between the front and the next element above and below is made up of Fu or Fo + POVH

EH Installation height

Fo Top gap

Fu Bottom gap

FH Front height

POH Pocket height

POVH Pocket connector height

\* If the distance between the front and the next element below is < 6 mm, the pocket connector must be embedded in the worktop

## Planning


### Max. front weights for worktop-mounted cabinets in kg per front

| Front height FH (mm) | Front width FB (mm) |     |     |     |     |     |     |
|----------------------|---------------------|-----|-----|-----|-----|-----|-----|
|                      | 450                 | 500 | 550 | 600 | 650 | 700 | 750 |
| 1130–1349            | 22                  | 20  | 18  | 16  | 15  | 14  | 13  |
| 1350–1499            | 23                  | 21  | 19  | 18  | 17  | 16  | 15  |
| 1500–1649            | 25                  | 23  | 21  | 19  | 18  | 17  | 16  |
| 1650–1803            | 27                  | 25  | 23  | 21  | 20  | 19  | 18  |

#### Note

- The max. pocket height when planning a worktop-mounted cabinet is 1806 mm


### Door support on partition side

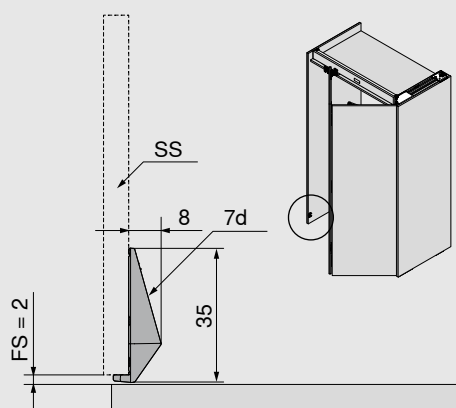

- Assembly height of the door support ideally as far down as possible, however up to a maximum height of 1000 mm from the front bottom edge
- Ensure collision-free installation

|    |                                |
|----|--------------------------------|
| FS | Front gap                      |
| SS | Partition side                 |
| 7d | Door support on partition side |

### Door support for decor panel/cabinet side

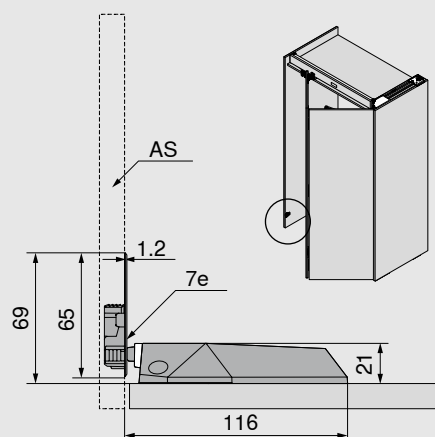


- Installation height AS: 64 mm + Fu from the decor panel/cabinet bottom edge
- Installation height front: 64 mm from the front bottom edge
- Ensure collision-free installation

|    |                                           |
|----|-------------------------------------------|
| AS | Decor panel/cabinet side                  |
| Fu | Bottom gap                                |
| 7e | Door support for decor panel/cabinet side |

## Planning

### Track installation dimension

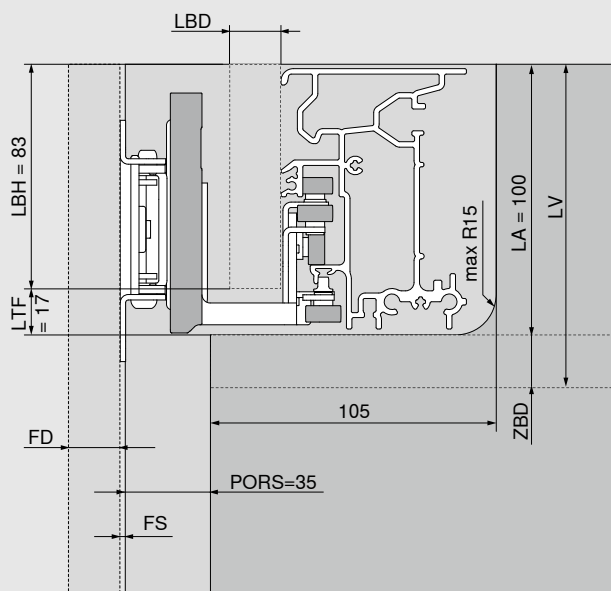

LBH = 83 mm

LBD = 15–19 mm  
(the spacer must be used  $\leq 17$  mm)

LTF = 17 mm

LA = 100 mm

LV = LA + ZBD ( $\geq 15$  mm)

- We recommend using a cross member to stabilise the fixed shelf. Minimum distance to front edge of internal pocket side = 170 mm
- A solid connection between the fixed shelf and the pocket with connector fittings is recommended for an attractive gap layout
- No mounting of add-on parts directly on the track

FD Front thickness

LA Track cut-out

LV Track installation

LBD Track cover panel thickness


LBH Track cover panel height

LTF Track gap

PORS Pocket back cut

ZBD Fixed shelf thickness

### Internal height and internal depth within the application

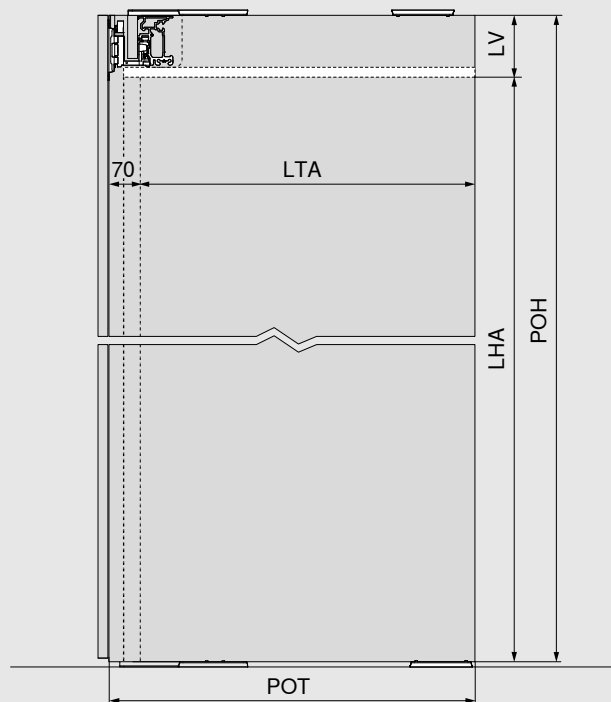

LHA = POH - LV

LTA = POT - 70 mm

- The internal height/internal depth within the application determines the maximum height/depth available for the internal cabinetry.

LHA Internal height within the application

LTA Internal depth within the application

LV Track installation

POH Pocket height

POT Pocket depth

REVEGO uno + duo – single door right or left and double door right or left



| Space requirement                               |                                           |                                            |                                           |
|-------------------------------------------------|-------------------------------------------|--------------------------------------------|-------------------------------------------|
| Installation dimensions (mm)                    | Installation width EB                     | Installation height EH                     | Installation depth ET                     |
|                                                 | 1350–2400                                 | 1155–3012                                  | from 573                                  |
| Internal dimensions within the application (mm) | Internal width within the application LWA | Internal height within the application LHA | Internal depth within the application LTA |
|                                                 | up to 2150                                | up to 2884                                 | from 483                                  |
| Pocket dimensions (mm)                          | Pocket width POB                          | Pocket height POH                          | Pocket depth POT                          |
|                                                 | 100 / 150                                 | 1142–2999                                  | from 553                                  |
| Front dimensions (mm)                           | Front width FB                            | Front height FH                            | Front thickness FD                        |
|                                                 | 442–898/748                               | 1130–2980                                  | 18–26                                     |
| Front weight FG                                 | up to 35 kg per front                     |                                            |                                           |

Overview

**Fittings selection made easy**

It is easy to work out the fittings and drilling positions you need using the Product Configurator.

With every product configuration, you will receive manufacturing drawings, cutting lists for wooden parts and fittings, 3D CAD data for your design software, as well as CAM programs including drilling information for direct machining on your CNC machine, in addition to the checked parts list.

Enter the web code in the Product Configurator, click on the short URL or scan the QR code. Don't have login information for digital services yet? Register here and get access free of charge.

Web code


DQIVXA

**Product Configurator**  
www.blum.com/rev11

**Assembly and adjustment**  
www.blum.com/rev7

## Double door component overview

### Pocket

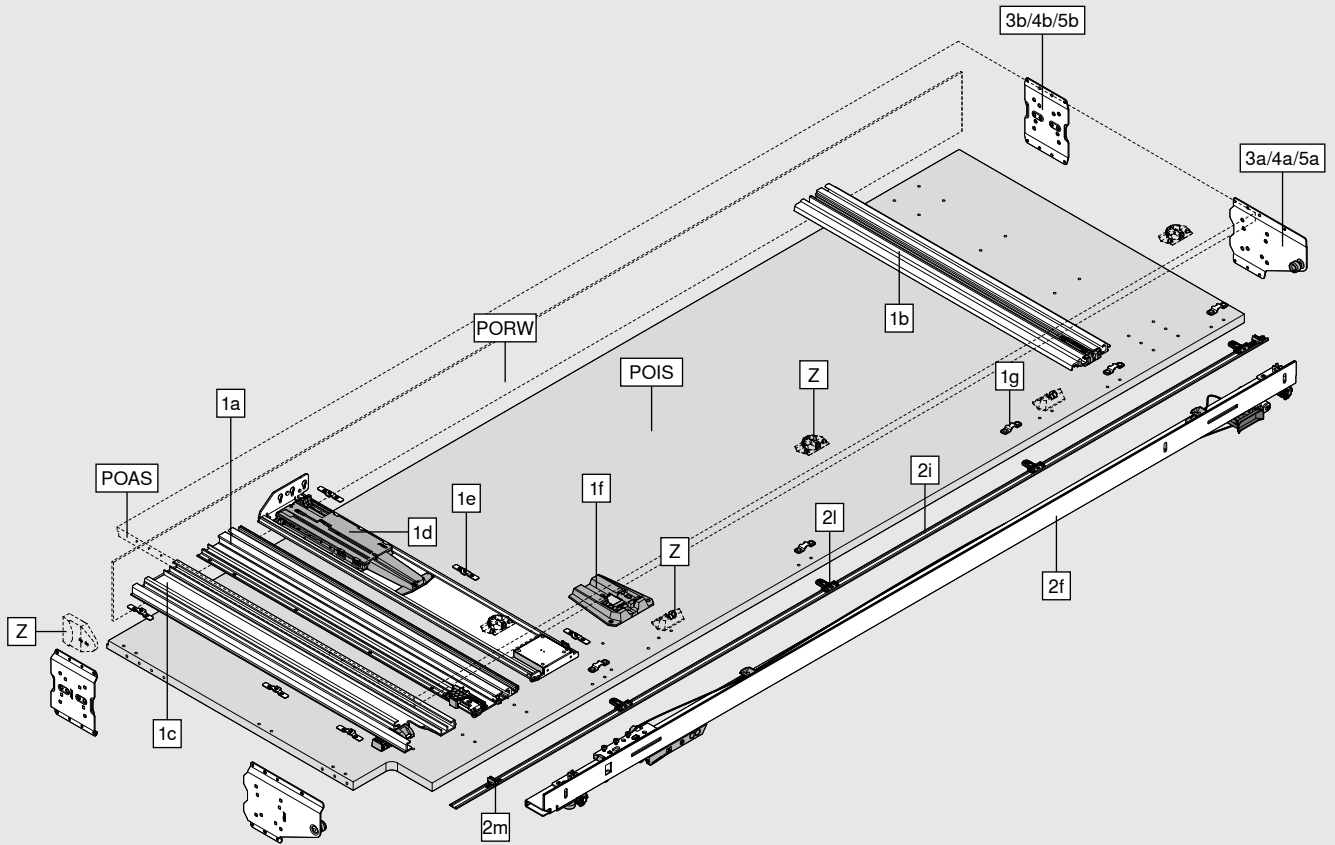


### Consisting of:

|                 |                                                            |
|-----------------|------------------------------------------------------------|
| <b>1a</b>       | Top pocket profile                                         |
| <b>1b</b>       | Bottom pocket profile                                      |
| <b>1c</b>       | Roller profile                                             |
| <b>1d</b>       | TIP-ON unit pocket                                         |
| <b>1e</b>       | Fixing clips                                               |
| <b>1f</b>       | BLUMOTION unit pocket                                      |
| <b>1g</b>       | Attachment for pocket cover strip                          |
| <b>2f</b>       | Hinge bracket                                              |
| <b>2i</b>       | Pocket cover strip                                         |
| <b>2l</b>       | Mounting for pocket cover strip                            |
| <b>2m</b>       | Pocket cover strip support                                 |
| <b>3a/4a/5a</b> | Front pocket connector                                     |
| <b>3b/4b/5b</b> | Rear pocket connector                                      |
| <b>Z</b>        | Adapter for electrical appliance switch-off<br>Scuff guard |
| <b>POAS</b>     | External pocket side                                       |
| <b>POIS</b>     | Internal pocket side                                       |
| <b>PORW</b>     | Pocket back                                                |

## Double door component overview

### Front

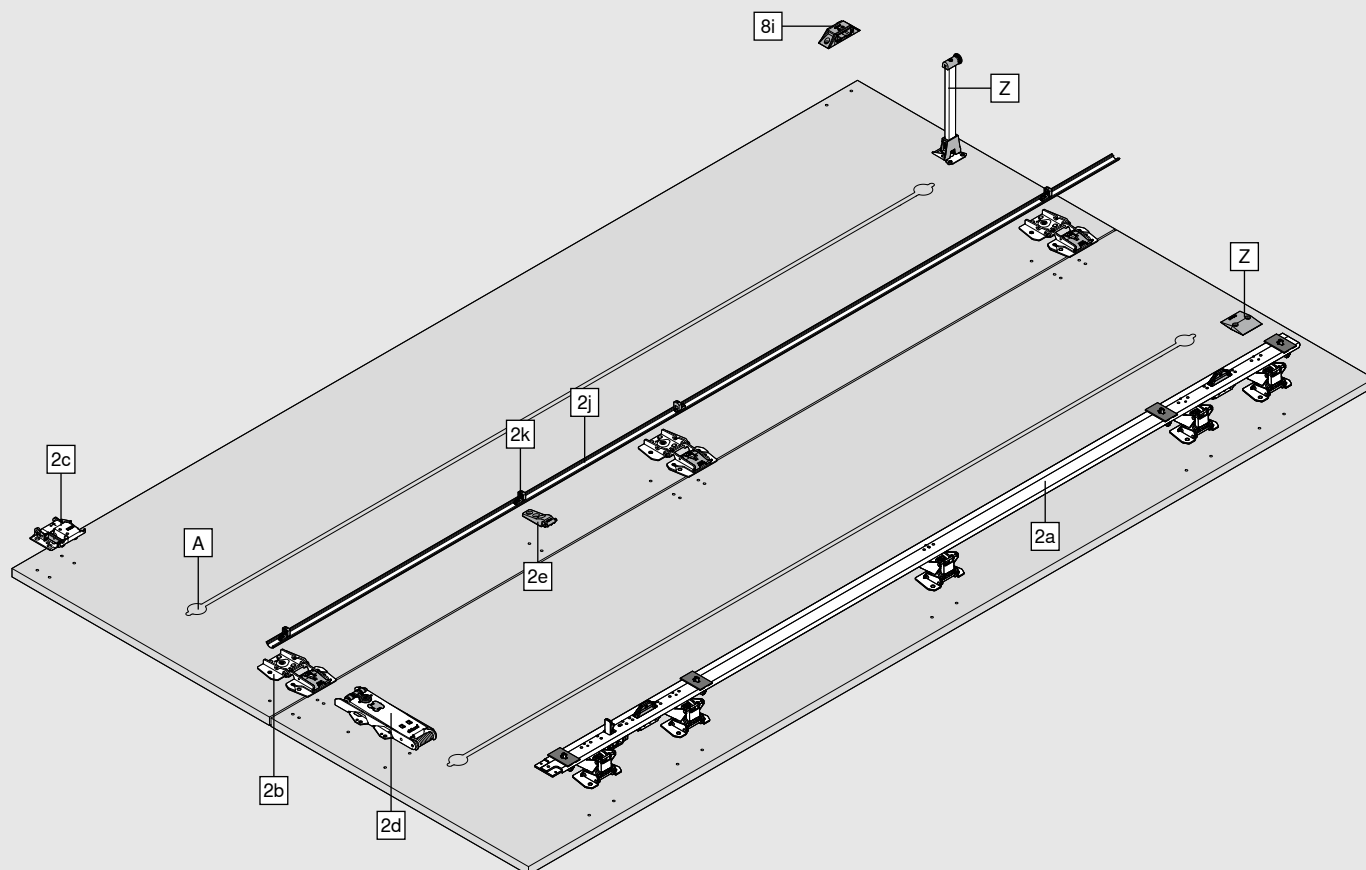

### Consisting of:


|    |                                     |
|----|-------------------------------------|
| 2a | Hinge strip                         |
| 2b | Centre hinge                        |
| 2c | Roller carriage hinge               |
| 2d | TIP-ON unit door                    |
| 2e | Support for door cover strip        |
| 2j | Door cover strip                    |
| 2k | Mounting for door cover strip       |
| 8i | Inter-door support                  |
| Z  | Inner door support incl. tip-assist |

A We recommend at least one alignment fitting per front with a maximum installation height of 20 mm.  
The space available between the pair of folding fronts is 20 mm.



## Double door component overview

### Track

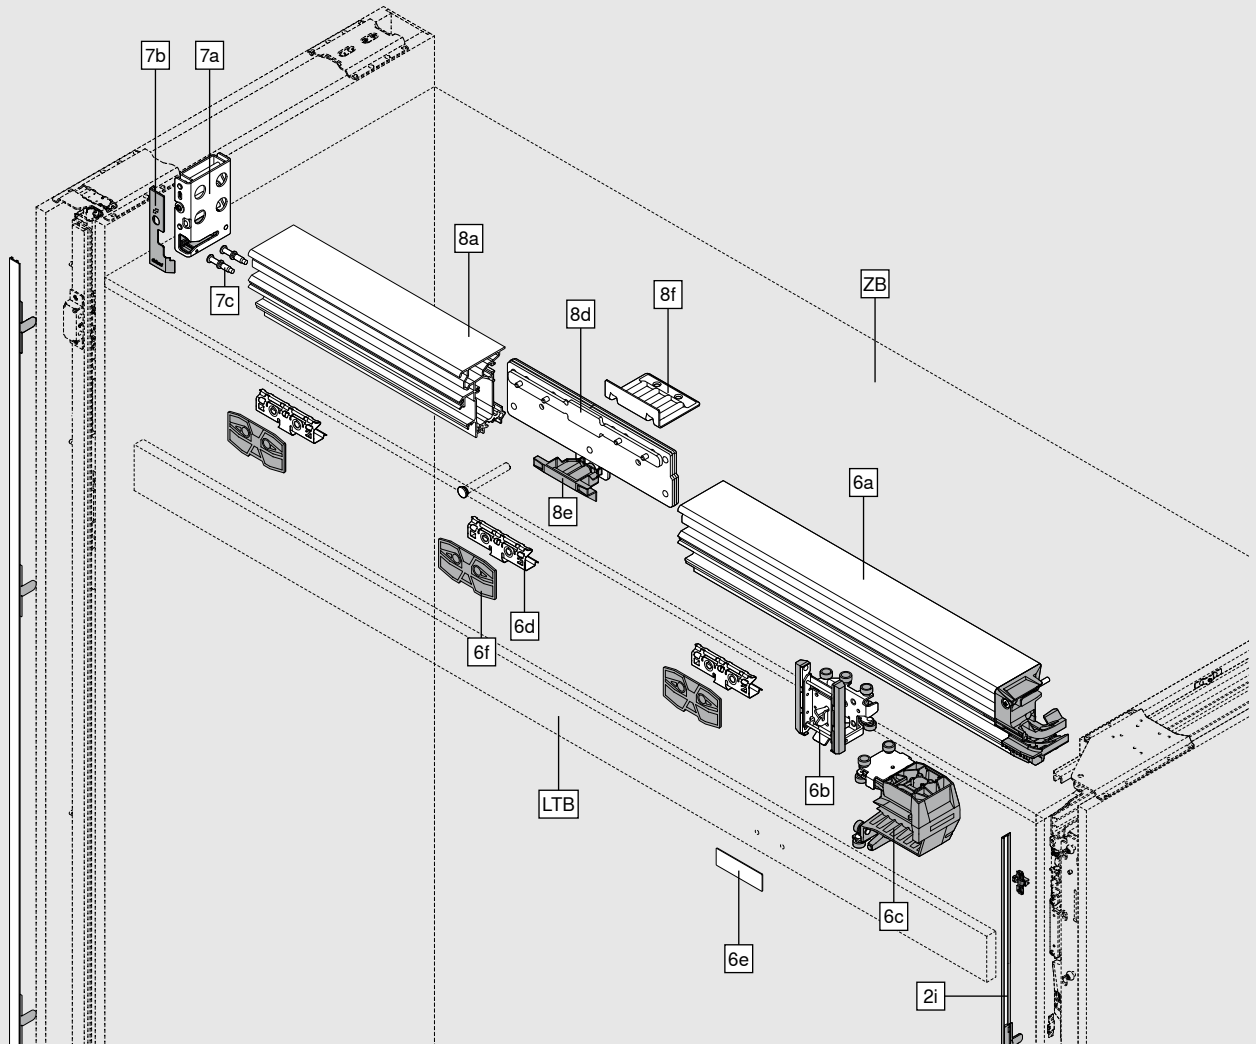


### Consisting of:

|     |                                    |
|-----|------------------------------------|
| 2h  | TIP-ON incl. catch plate           |
| 2i  | Pocket cover strip incl. mounting  |
| 6a  | Track                              |
| 6b  | Roller carriage                    |
| 6c  | Roller carriage transporter        |
| 6d  | Mounting for track cover panels    |
| 6e  | Catch plate                        |
| 6f  | Spacer                             |
| 7a  | Track fixing                       |
| 7b  | Cover for track fixing             |
| 7c  | Pin for track fixing               |
| 8a  | Track extension                    |
| 8d  | Track connection                   |
| 8e  | Cover for track connection         |
| 8f  | Support angle for depth adjustment |
| LTB | Track cover panel                  |
| ZB  | Fixed shelf                        |

## Single door component overview

### Pocket

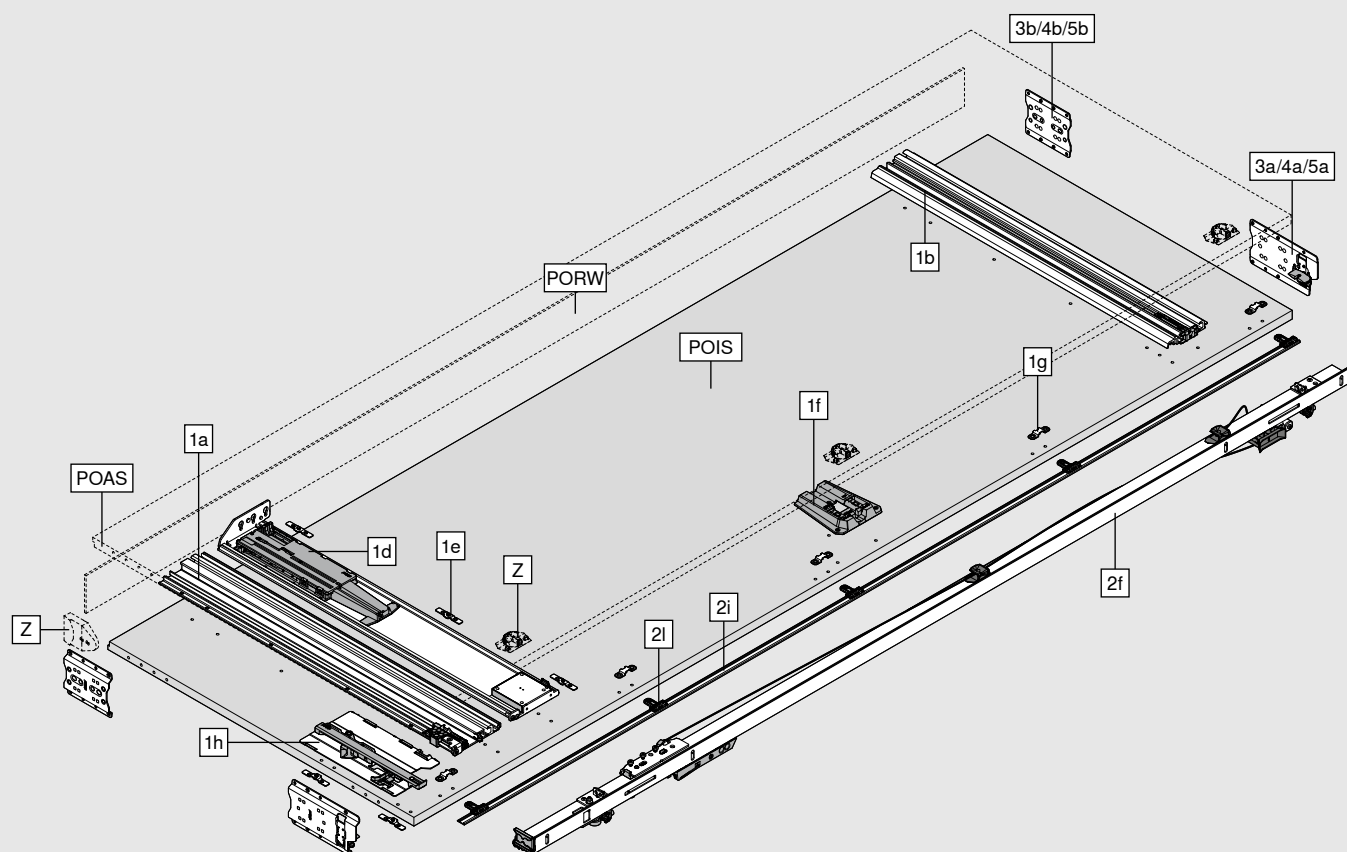


### Consisting of:

|          |                                             |
|----------|---------------------------------------------|
| 1a       | Top pocket profile                          |
| 1b       | Bottom pocket profile                       |
| 1d       | TIP-ON unit pocket                          |
| 1e       | Fixing clips                                |
| 1f       | BLUMOTION unit pocket                       |
| 1g       | Attachment for pocket cover strip           |
| 1h       | BLUMATIC unit                               |
| 2f       | Hinge bracket                               |
| 2i       | Pocket cover strip                          |
| 2l       | Mounting for pocket cover strip             |
| 3a/4a/5a | Front pocket connector                      |
| 3b/4b/5b | Rear pocket connector                       |
| Z        | Adapter for electrical appliance switch-off |
|          | Scuff guard                                 |
| POAS     | External pocket side                        |
| POIS     | Internal pocket side                        |
| PORW     | Pocket back                                 |

## Single door component overview

### Front

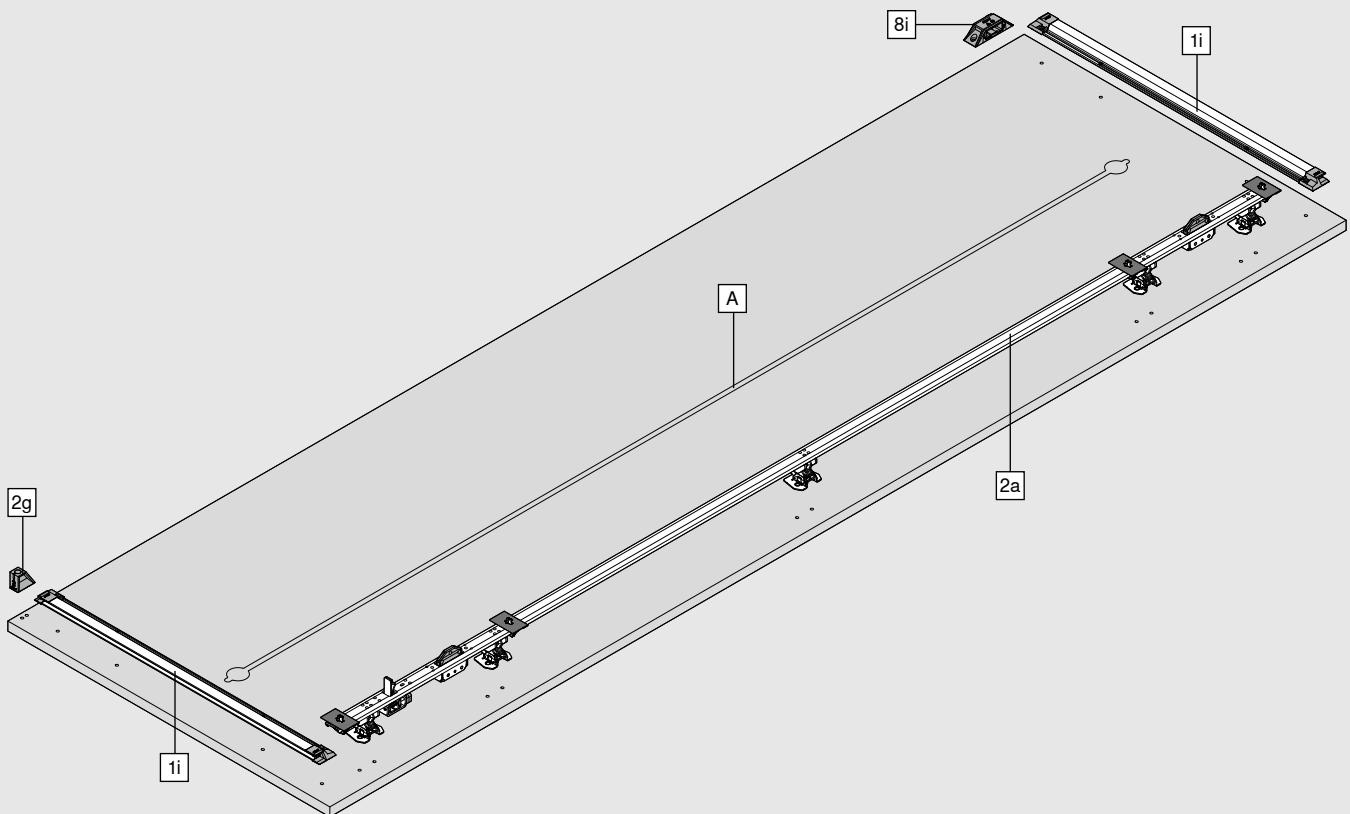

### Consisting of:

|    |                    |
|----|--------------------|
| 1i | Door stabiliser    |
| 2a | Hinge strip        |
| 2g | TIP-ON spacer      |
| 8i | Inter-door support |

A We recommend at least one alignment fitting with a maximum installation height of 3 mm.  
Alignment fittings with a height of more than 3 mm must not be used in the pocket.

## Double door ordering information

| 1                                                                                 | Pocket profile set with TIP-ON |                             |             |             |
|-----------------------------------------------------------------------------------|--------------------------------|-----------------------------|-------------|-------------|
|  | Nominal length NL (mm)         | Min. pocket depth POT* (mm) | Left        | Right       |
|                                                                                   | 450                            | 550                         | 802P450D.L3 | 802P450D.R3 |
|                                                                                   | 525                            | 625                         | 802P525D.L3 | 802P525D.R3 |
|                                                                                   | 600                            | 700                         | 802P600D.L3 | 802P600D.R3 |
|                                                                                   | 675                            | 775                         | 802P675D.L3 | 802P675D.R3 |
|                                                                                   | 750                            | 850                         | 802P750D.L3 | 802P750D.R3 |

\* Specification without pocket back. A back construction with a thickness of at least 3 mm is required.  
Pocket and roller profiles as well as TIP-ON unit pocket can be shortened to any nominal length.

### Consisting of:

|    |     |                                   |
|----|-----|-----------------------------------|
| 1a | 1 x | Top pocket profile                |
| 1b | 1 x | Bottom pocket profile             |
| 1c | 1 x | Roller profile                    |
| 1d | 1 x | TIP-ON unit pocket                |
| 1e | 6 x | Fixing clips                      |
| 1f | 1 x | BLUMOTION unit pocket             |
| 1g | 5 x | Attachment for pocket cover strip |

| 2                                                                                   | Hinge bracket set with TIP-ON |             |             |
|-------------------------------------------------------------------------------------|-------------------------------|-------------|-------------|
|  | Pocket height (mm)            | Left        | Right       |
|                                                                                     | 1142–1356                     | 802T1140.L3 | 802T1140.R3 |
|                                                                                     | 1357–1506                     | 802T1350.L3 | 802T1350.R3 |
|                                                                                     | 1507–1656                     | 802T1500.L3 | 802T1500.R3 |
|                                                                                     | 1657–1806                     | 802T1650.L3 | 802T1650.R3 |
|                                                                                     | 1807–1956                     | 802T1800.L3 | 802T1800.R3 |
|                                                                                     | 1957–2106                     | 802T1950.L3 | 802T1950.R3 |
|                                                                                     | 2107–2256                     | 802T2100.L3 | 802T2100.R3 |
|                                                                                     | 2257–2406                     | 802T2250.L3 | 802T2250.R3 |
|                                                                                     | 2407–2556                     | 802T2400.L3 | 802T2400.R3 |
|                                                                                     | 2557–2706                     | 802T2550.L3 | 802T2550.R3 |
|                                                                                     | 2707–2856                     | 802T2700.L3 | 802T2700.R3 |
|                                                                                     | 2857–2999                     | 802T2850.L3 | 802T2850.R3 |

Cover strips must be shortened to the required length

### Consisting of:

|    |       |                                    |
|----|-------|------------------------------------|
| 2a | 1 x   | Hinge strip                        |
| 2b | 3 x   | Centre hinge                       |
| 2c | 1 x   | Roller carriage hinge              |
| 2d | 1 x   | TIP-ON unit door                   |
| 2e | 1 x   | Support for door cover strip       |
| 2f | 1 x   | Hinge bracket                      |
| 2i | 1 x   | Pocket cover strip, black anodised |
| 2j | 1 x   | Door cover strip, black anodised   |
| 2k | 4 x   | Mounting for door cover strip      |
| 2l | 2–4 x | Mountings for pocket cover strip   |
| 2m | 1 x   | Pocket cover strip support         |

## Double door ordering information

| Pocket connector set                                                              |                            |                        |        |          |
|-----------------------------------------------------------------------------------|----------------------------|------------------------|--------|----------|
| 3                                                                                 | Application with plinth    |                        |        |          |
|  | Pocket side thickness (mm) |                        | Colour |          |
|                                                                                   | 15–17                      |                        | Black  | 802V560B |
|                                                                                   | 18–19                      |                        | Black  | 802V580B |
| Pocket connector top + bottom: POVH 10 mm for 0–6 mm gap                          |                            |                        |        |          |
| POVH Pocket connector height                                                      |                            |                        |        |          |
| Consisting of:                                                                    |                            |                        |        |          |
| 3a                                                                                | 2 x                        | Front pocket connector |        |          |
| 3b                                                                                | 2 x                        | Rear pocket connector  |        |          |

| Pocket connector set                                                              |                            |                        |        |             |             |
|-----------------------------------------------------------------------------------|----------------------------|------------------------|--------|-------------|-------------|
| 4                                                                                 | Application without plinth |                        |        |             |             |
|  | Pocket side thickness (mm) |                        | Colour | Left        | Right       |
|                                                                                   | 15–17                      |                        | Black  | 802V660B.L1 | 802V660B.R1 |
|                                                                                   | 18–19                      |                        | Black  | 802V680B.L1 | 802V680B.R1 |
| Top pocket connector: POVH 10 mm for 0–6 mm gap                                   |                            |                        |        |             |             |
| Bottom pocket connector: POVH 3 mm for gap from 7–13 mm                           |                            |                        |        |             |             |
| POVH Pocket connector height                                                      |                            |                        |        |             |             |
| Consisting of:                                                                    |                            |                        |        |             |             |
| 4a                                                                                | 2 x                        | Front pocket connector |        |             |             |
| 4b                                                                                | 2 x                        | Rear pocket connector  |        |             |             |

| Pocket connector set                                                                |                                     |                        |        |             |             |
|-------------------------------------------------------------------------------------|-------------------------------------|------------------------|--------|-------------|-------------|
| 5                                                                                   | Worktop-mounted cabinet application |                        |        |             |             |
|  | Pocket side thickness (mm)          |                        | Colour | Left        | Right       |
|                                                                                     | 15–17                               |                        | Black  | 802V760B.L3 | 802V760B.R3 |
|                                                                                     | 18–19                               |                        | Black  | 802V780B.L3 | 802V780B.R3 |
| Top pocket connector: POVH 10 mm for 0–6 mm gap                                     |                                     |                        |        |             |             |
| Bottom pocket connector: POVH 3 mm for gap from 3–6 mm                              |                                     |                        |        |             |             |
| POVH Pocket connector height                                                        |                                     |                        |        |             |             |
| Consisting of:                                                                      |                                     |                        |        |             |             |
| 5a                                                                                  | 2 x                                 | Front pocket connector |        |             |             |
| 5b                                                                                  | 2 x                                 | Rear pocket connector  |        |             |             |

| 6                                                                                  | Track set             |                                 |                |             |             |
|------------------------------------------------------------------------------------|-----------------------|---------------------------------|----------------|-------------|-------------|
|  | LWA2 double door (mm) |                                 | Colour         | Left        | Right       |
|                                                                                    | 1050                  |                                 | Black anodised | 802L1050DL3 | 802L1050DR3 |
|                                                                                    | 1200                  |                                 | Black anodised | 802L1200DL3 | 802L1200DR3 |
|                                                                                    | 1250                  |                                 | Black anodised | 802L1250DL3 | 802L1250DR3 |
|                                                                                    | 1350                  |                                 | Black anodised | 802L1350DL3 | 802L1350DR3 |
| Track can be shortened to any length.                                              |                       |                                 |                |             |             |
| LWA2 Internal width within the application, double door                            |                       |                                 |                |             |             |
| Consisting of:                                                                     |                       |                                 |                |             |             |
| 6a                                                                                 | 1 x                   | Track                           |                |             |             |
| 6b                                                                                 | 1 x                   | Roller carriage                 |                |             |             |
| 6c                                                                                 | 1 x                   | Roller carriage transporter     |                |             |             |
| 6d                                                                                 | 2 x                   | Mounting for track cover panels |                |             |             |
| 6e                                                                                 | 1 x                   | Catch plate, black              |                |             |             |
| 6f                                                                                 | 2 x                   | Spacer                          |                |             |             |

## Double door ordering information

| 8                                                                                | Assembly set for a single door and double door combined |             |             |
|----------------------------------------------------------------------------------|---------------------------------------------------------|-------------|-------------|
|  | LWA1 single door (mm)                                   | Left        | Right       |
|                                                                                  | 600                                                     | 802M6003.L3 | 802M6003.R3 |
|                                                                                  | 700                                                     | 802M7003.L3 | 802M7003.R3 |
|                                                                                  | 800                                                     | 802M8003.L3 | 802M8003.R3 |

Track extension can be shortened to any length.

LWA1 Internal width within the application, single door

### Consisting of:

|    |     |                                    |
|----|-----|------------------------------------|
| 6d | 1 x | Mounting for track cover panel     |
| 6f | 1 x | Spacer                             |
| 7a | 1 x | Track fixing                       |
| 7b | 1 x | Cover for track fixing             |
| 7c | 2 x | Pin for track fixing               |
| 8a | 1 x | Track extension                    |
| 8d | 1 x | Track connection                   |
| 8e | 1 x | Cover for track connection         |
| 8f | 1 x | Support angle for depth adjustment |
| 8i | 1 x | Inter-door support (right + left)  |

## Z Accessories

### Inner door support incl. tip-assist

|                                                                                     |                             |          |
|-------------------------------------------------------------------------------------|-----------------------------|----------|
|  | Support length up to 218 mm | 802ZA030 |
|                                                                                     | Support length up to 350 mm | 802ZA031 |

For additional support on the worktop area, plinth front, cabinet, etc.

### Adapter for electrical appliance switch-off

|                                                                                    |                                                                                                                                                                                     |          |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
|  |                                                                                                                                                                                     | 802ZG0CS |
|                                                                                    | Suitable exclusively for electrical appliance switch-off with magnetic contact (part number 3623011) from Halemeier GmbH ( <a href="http://www.halemeier.de">www.halemeier.de</a> ) |          |
|                                                                                    | Liability disclaimer: Blum does not accept any liability for the function of the electrical appliance switch-off                                                                    |          |

### Consisting of:

|     |                                                     |
|-----|-----------------------------------------------------|
| 1 x | Contact switch adapter                              |
| 1 x | Ring magnet with catch plate                        |
| 4 x | M4x12 countersunk screws for contact switch adapter |
| 2 x | M4x5 round head screws for contact switch adapter   |

### Scuff guard

|                                                                                     |                                                                                                   |          |
|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|----------|
|  | For front thicknesses starting from 23 mm                                                         | 802ZA00S |
|                                                                                     | For front thicknesses less than 23 mm, the scuff guard can be used as additional front protection |          |

### Consisting of:

|     |                                  |
|-----|----------------------------------|
| 3 x | External pocket side scuff guard |
| 2 x | Internal pocket side scuff guard |

## Double door ordering information

| Z Accessories                                                                     |                                                             |             |
|-----------------------------------------------------------------------------------|-------------------------------------------------------------|-------------|
| Screws                                                                            |                                                             |             |
|  | 6 x 14.5 mm system screws, nickel plated                    | 661.1450.HG |
|                                                                                   |                                                             |             |
|  | 4 x 35 mm chipboard screws, nickel plated                   | 664.3500    |
|                                                                                   |                                                             |             |
| Pocket connector                                                                  |                                                             |             |
|  | Rear pocket connector, pocket connector height (POVH) 10 mm | 802V5002    |
|                                                                                   |                                                             |             |
| Additional pocket connector for set-back plinth leg                               |                                                             |             |
| EXPANDO T – for thin fronts                                                       |                                                             |             |
|  | EXPANDO T – single                                          | 70T4532T    |
|                                                                                   |                                                             |             |
| EXPANDO T suitable for thin fronts – see page 81                                  |                                                             |             |
| For front thicknesses less than 18 mm, we recommend a trial application           |                                                             |             |
| Screws are not included in the scope of delivery                                  |                                                             |             |



## Single door ordering information

| 1                                                                                 | Pocket profile set with TIP-ON |                             |             |             |
|-----------------------------------------------------------------------------------|--------------------------------|-----------------------------|-------------|-------------|
|  | Nominal length NL (mm)         | Min. pocket depth POT* (mm) | Left        | Right       |
|                                                                                   | 450                            | 550                         | 801P450E.L3 | 801P450E.R3 |
|                                                                                   | 500                            | 600                         | 801P500E.L3 | 801P500E.R3 |
|                                                                                   | 600                            | 700                         | 801P600E.L3 | 801P600E.R3 |
|                                                                                   | 700                            | 800                         | 801P700E.L3 | 801P700E.R3 |
|                                                                                   | 800                            | 900                         | 801P800E.L3 | 801P800E.R3 |

\* Specification without pocket back. A back construction with a thickness of at least 3 mm is required.  
Pocket profiles and TIP-ON unit pocket can be shortened to any nominal length.

### Consisting of:

|    |     |                                                               |
|----|-----|---------------------------------------------------------------|
| 1a | 1 x | Top pocket profile                                            |
| 1b | 1 x | Bottom pocket profile                                         |
| 1d | 1 x | TIP-ON unit pocket                                            |
| 1e | 5 x | Fixing clips                                                  |
| 1f | 1 x | BLUMOTION unit pocket                                         |
| 1g | 5 x | Attachment for pocket cover strip                             |
| 1h | 1 x | BLUMATIC unit                                                 |
| 1i | 2 x | Door stabiliser: runner profile incl. end cap, black anodised |

| 2                                                                                   | Hinge bracket set  |             |             |  |
|-------------------------------------------------------------------------------------|--------------------|-------------|-------------|--|
|  | Pocket height (mm) | Left        | Right       |  |
|                                                                                     | 1142–1356          | 801T1140.L3 | 801T1140.R3 |  |
|                                                                                     | 1357–1506          | 801T1350.L3 | 801T1350.R3 |  |
|                                                                                     | 1507–1656          | 801T1500.L3 | 801T1500.R3 |  |
|                                                                                     | 1657–1806          | 801T1650.L3 | 801T1650.R3 |  |
|                                                                                     | 1807–1956          | 801T1800.L3 | 801T1800.R3 |  |
|                                                                                     | 1957–2106          | 801T1950.L3 | 801T1950.R3 |  |
|                                                                                     | 2107–2256          | 801T2100.L3 | 801T2100.R3 |  |
|                                                                                     | 2257–2406          | 801T2250.L3 | 801T2250.R3 |  |
|                                                                                     | 2407–2556          | 801T2400.L3 | 801T2400.R3 |  |
|                                                                                     | 2557–2706          | 801T2550.L3 | 801T2550.R3 |  |
|                                                                                     | 2707–2856          | 801T2700.L3 | 801T2700.R3 |  |
|                                                                                     | 2857–2999          | 801T2850.L3 | 801T2850.R3 |  |

Cover strips must be shortened to the required length

### Consisting of:

|    |       |                                                         |
|----|-------|---------------------------------------------------------|
| 2a | 1 x   | Hinge strip, black                                      |
| 2f | 1 x   | Hinge bracket                                           |
| 2g | 1 x   | TIP-ON spacer                                           |
| 2h | 1 x   | TIP-ON incl. catch plate, black                         |
| 2i | 1 x   | Pocket cover strip, black anodised                      |
| 2l | 3–5 x | Mountings for pocket cover strip                        |
| -  | 21 x  | System screws for 1i, 2a, 2g and 8i, 6 x 14.5 mm, black |

## Single door ordering information

| Pocket connector set                                                             |                            |                        |          |  |
|----------------------------------------------------------------------------------|----------------------------|------------------------|----------|--|
| 3                                                                                | Application with plinth    |                        |          |  |
|  | Pocket side thickness (mm) | Colour                 |          |  |
|                                                                                  | 15–19                      | Black                  | 801V505B |  |
| Pocket connector top + bottom: POVH 10 mm for 0–6 mm gap                         |                            |                        |          |  |
| POVH Pocket connector height                                                     |                            |                        |          |  |
| Consisting of:                                                                   |                            |                        |          |  |
| 3a                                                                               | 2 x                        | Front pocket connector |          |  |
| 3b                                                                               | 2 x                        | Rear pocket connector  |          |  |


| Pocket connector set                                                              |                            |                        |             |             |
|-----------------------------------------------------------------------------------|----------------------------|------------------------|-------------|-------------|
| 4                                                                                 | Application without plinth |                        |             |             |
|  | Pocket side thickness (mm) | Colour                 | Left        | Right       |
|                                                                                   | 15–19                      | Black                  | 801V605B.L1 | 801V605B.R1 |
| Top pocket connector: POVH 10 mm for 0–6 mm gap                                   |                            |                        |             |             |
| Bottom pocket connector: POVH 3 mm for gap from 7–13 mm                           |                            |                        |             |             |
| POVH Pocket connector height                                                      |                            |                        |             |             |
| Consisting of:                                                                    |                            |                        |             |             |
| 4a                                                                                | 2 x                        | Front pocket connector |             |             |
| 4b                                                                                | 2 x                        | Rear pocket connector  |             |             |

| Pocket connector set                                                                |                                     |                        |             |             |
|-------------------------------------------------------------------------------------|-------------------------------------|------------------------|-------------|-------------|
| 5                                                                                   | Worktop-mounted cabinet application |                        |             |             |
|  | Pocket side thickness (mm)          | Colour                 | Left        | Right       |
|                                                                                     | 15–19                               | Black                  | 801V705B.L3 | 801V705B.R3 |
| Top pocket connector: POVH 10 mm for 0–6 mm gap                                     |                                     |                        |             |             |
| Bottom pocket connector: POVH 3 mm for gap from 3–6 mm                              |                                     |                        |             |             |
| POVH Pocket connector height                                                        |                                     |                        |             |             |
| Consisting of:                                                                      |                                     |                        |             |             |
| 5a                                                                                  | 2 x                                 | Front pocket connector |             |             |
| 5b                                                                                  | 2 x                                 | Rear pocket connector  |             |             |

## Single door ordering information

| Z Accessories                                                                       |                                                                                                                                                                                     |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Adapter for electrical appliance switch-off</b>                                  |                                                                                                                                                                                     |
|    | 801ZG0BS                                                                                                                                                                            |
|                                                                                     | Suitable exclusively for electrical appliance switch-off with magnetic contact (part number 3623011) from Halemeier GmbH ( <a href="http://www.halemeier.de">www.halemeier.de</a> ) |
|                                                                                     | Liability disclaimer: Blum does not accept any liability for the function of the electrical appliance switch-off                                                                    |
| <b>Consisting of:</b>                                                               |                                                                                                                                                                                     |
| 1 x                                                                                 | Contact switch adapter                                                                                                                                                              |
| 1 x                                                                                 | Ring magnet with catch plate                                                                                                                                                        |
| 4 x                                                                                 | M4x12 countersunk screws for contact switch adapter                                                                                                                                 |
| 2 x                                                                                 | M4x5 round head screws for contact switch adapter                                                                                                                                   |
| <b>Scuff guard</b>                                                                  |                                                                                                                                                                                     |
|    | For front thicknesses starting from 23 mm                                                                                                                                           |
|                                                                                     | For front thicknesses less than 23 mm, the scuff guard can be used as additional front protection                                                                                   |
| <b>Consisting of:</b>                                                               |                                                                                                                                                                                     |
| 3 x                                                                                 | External pocket side scuff guard                                                                                                                                                    |
| <b>Screws</b>                                                                       |                                                                                                                                                                                     |
|  | 6 x 14.5 mm system screws, nickel plated                                                                                                                                            |
|                                                                                     | 661.1450.HG                                                                                                                                                                         |
|  | 4 x 35 mm chipboard screws, nickel plated                                                                                                                                           |
|                                                                                     | 664.3500                                                                                                                                                                            |
| <b>Pocket connector</b>                                                             |                                                                                                                                                                                     |
|  | Rear pocket connector, pocket connector height (POVH) 10 mm                                                                                                                         |
|                                                                                     | 801V5002                                                                                                                                                                            |
| Additional pocket connector for set-back plinth leg                                 |                                                                                                                                                                                     |
| <b>EXPANDO T – for thin fronts</b>                                                  |                                                                                                                                                                                     |
|  | EXPANDO T – single                                                                                                                                                                  |
|                                                                                     | 70T4532T                                                                                                                                                                            |
| EXPANDO T suitable for thin fronts – see page 81                                    |                                                                                                                                                                                     |
| For front thicknesses less than 18 mm, we recommend a trial application             |                                                                                                                                                                                     |
| Screws are not included in the scope of delivery                                    |                                                                                                                                                                                     |

## Planning

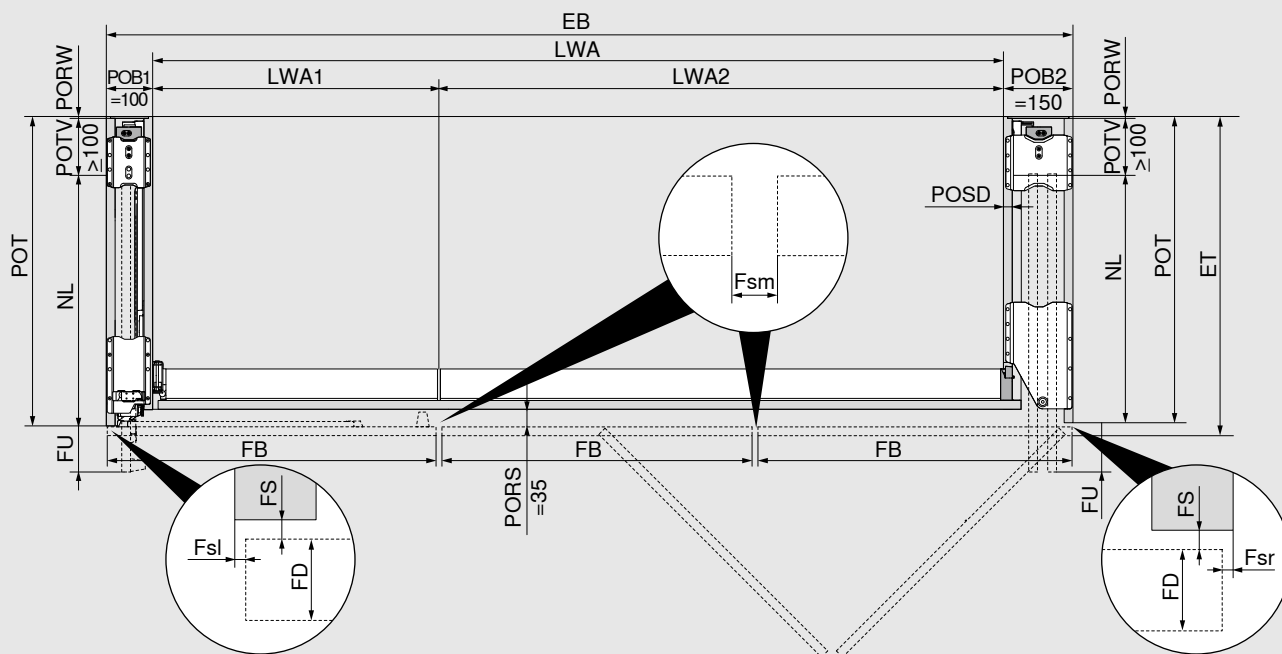

### Installation width/internal width within the application

$EB = LWA1 + LWA2 + POB1 (100 \text{ mm}) + POB2 (150 \text{ mm})$

### Front width/front protrusion

Double door:  $FB = (LWA2 + POB2 - Fsl - Fsm - Fsr) : 2$  (fronts)

Single door:  $FB = LWA1 + POB1 - Fsl - Fsr$

$Fsl/Fsr = 1.0\text{--}4.0 \text{ mm}$ ;  $Fsm = 2.0\text{--}8.0 \text{ mm}$

Max.  $NL = FB + 8 \text{ mm}$

$FU = FB - NL + 15 \text{ mm}$   
(min.  $FU = 7 \text{ mm}$ )

### Installation depth/pocket depth

$ET = POT + FS (2 \text{ mm}) + FD$

$FD = 18\text{--}26 \text{ mm}$

Min.  $POT = NL + POTV (\geq 100 \text{ mm}) + PORW (\geq 3 \text{ mm})$

$POSD = 15\text{--}19 \text{ mm}$

- By cutting the profiles to size, the front protrusion (FU) can be customised.
- To ensure optimum functionality, the fronts are at a slight angle inside the pocket.
- The internal width within the application determines the maximum width available for the internal cabinetry.
- For front thicknesses (FD) less than 18 mm (possible depending on material/stability), we recommend a trial application.

**EB** Installation width

**ET** Installation depth

**Fsl** Gap left

**Fsr** Gap right

**Fsm** Centre side gap  
(between the fronts)

**FB** Front width

**FD** Front thickness

**FS** Front gap

**FU** Front protrusion

**LWA** Internal width within the application

**LWA1** Internal width within the application,  
single door

**LWA2** Internal width within the application,  
double door

**NL** Nominal length

**POB1** Single door pocket width

**POB2** Double door pocket width

**POT** Pocket depth

**PORS** Pocket back cut

**PORW** Pocket back


**POSD** Pocket side thickness

**POTV** Pocket depth loss


## Planning

### Minimum side gap

#### Pocket to pocket/adjacent cabinet

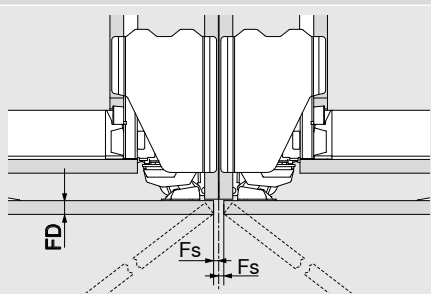

#### Pocket to wall/decor panel

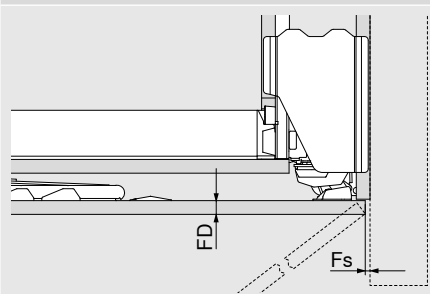

#### FD (mm)

#### Min. Fs (mm)

18 –20

2

20.1–23

2.5

23.1–26

3


For free-standing applications,  
Fs must be minimum 1 mm

FD Front thickness

Fs Side gap

### Installation height, front height

#### Application with plinth

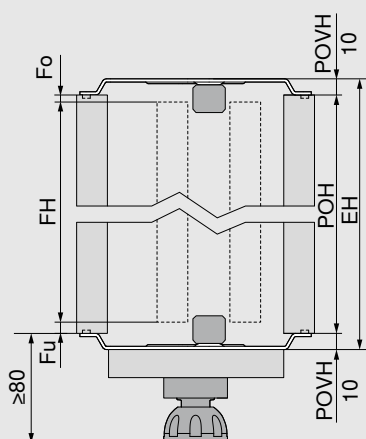

$$FH = POH - Fo - Fu$$

$$EH = POH + POVH \text{ top and bottom}$$

POVH 10 mm: gap 0–6 mm

- Take into account that the pocket must be tilted during installation.
- Minimum distance to the next movable element above 3 mm, for non-movable elements a front insertion space of 6 mm must be taken into account
- The pocket connector height must be taken into account during planning
- Minimum plinth height 80 mm

EH Installation height

Fo Top gap

Fu Bottom gap

FH Front height


POH Pocket height

POVH Pocket connector height


### Application with set-back plinth

#### Additional rear pocket connector

#### REVEGO uno

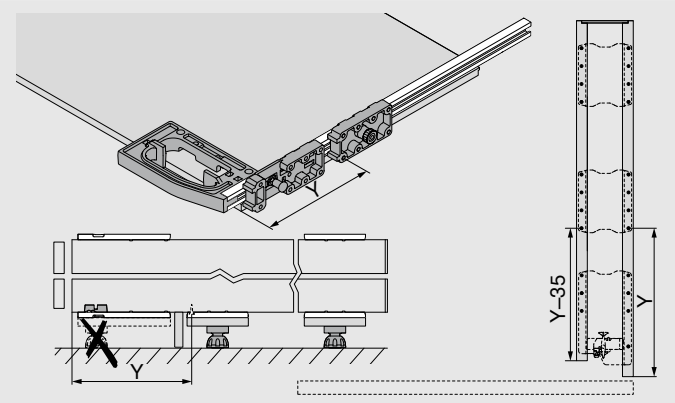


#### REVEGO duo

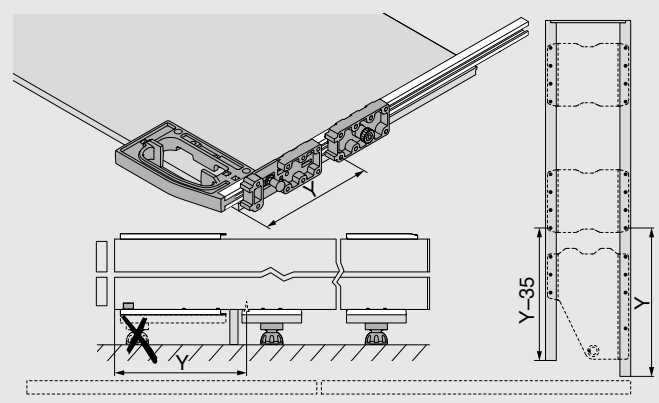

## Planning

### Installation height, front height

#### Application without plinth

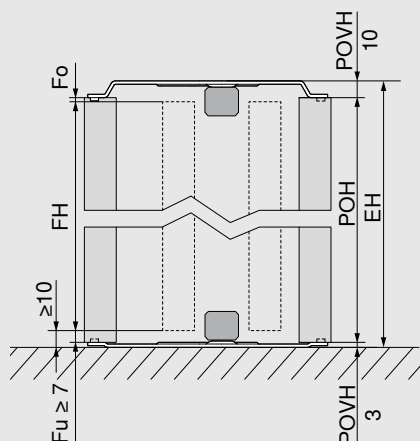

$$FH = POH - Fo - Fu$$

$$EH = POH + POVH \text{ top and bottom}$$

POVH top 10 mm: gap 0–6 mm

POVH bottom 3 mm: gap from 7–13 mm

- Take into account that the pocket must be tilted during installation.
- Minimum distance from the bottom front edge to the floor or next element below is 10 mm
- Minimum distance to the next movable element above 3 mm, for non-movable elements a front insertion space of 6 mm must be taken into account
- The pocket connector height must be taken into account during planning

EH Installation height

Fo Top gap

Fu Bottom gap


FH Front height

POH Pocket height

POVH Pocket connector height

### Installation height, front height

#### Worktop-mounted cabinet application

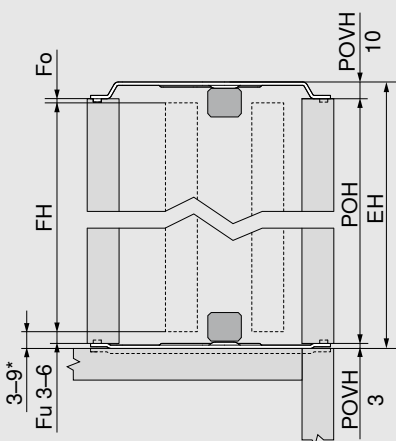

$$FH = POH - Fo - Fu$$

$$EH = POH + POVH \text{ top and bottom}$$

POVH top 10 mm: gap 0–6 mm

POVH bottom 3 mm: gap from 3–6 mm

- Take into account that the pocket must be tilted during installation.
- Minimum distance between front and next element below with flush front/worktop is 3 mm
- Minimum distance between front and next element below with protruding front (e.g. protruding worktop) is 6 mm
- Minimum distance to the next movable element above 3 mm, for non-movable elements a front insertion space of 6 mm must be taken into account
- A trial application is recommended in the edge areas
- The pocket connector height must be taken into account during planning
- The distance between the front and the next element above and below is made up of Fu or Fo + POVH

EH Installation height

Fo Top gap

Fu Bottom gap

FH Front height

POH Pocket height

POVH Pocket connector height

\* If the distance between the front and the next element below is < 6 mm, the pocket connector must be embedded in the worktop

## Planning

### Max. front weights for worktop-mounted cabinets in kg per front

| Front height FH (mm) | Front width FB (mm) |     |     |     |     |     |     |
|----------------------|---------------------|-----|-----|-----|-----|-----|-----|
|                      | 450                 | 500 | 550 | 600 | 650 | 700 | 750 |
| 1130–1349            | 22                  | 20  | 18  | 16  | 15  | 14  | 13  |
| 1350–1499            | 23                  | 21  | 19  | 18  | 17  | 16  | 15  |
| 1500–1649            | 25                  | 23  | 21  | 19  | 18  | 17  | 16  |
| 1650–1803            | 27                  | 25  | 23  | 21  | 20  | 19  | 18  |

#### Note


##### REVEGO uno:

- The max. front width when planning a worktop-mounted cabinet is 750 mm
- The max. pocket height when planning a worktop-mounted cabinet is 1806 mm

##### REVEGO duo:

- The max. pocket height when planning a worktop-mounted cabinet is 1806 mm


### Inter-door support

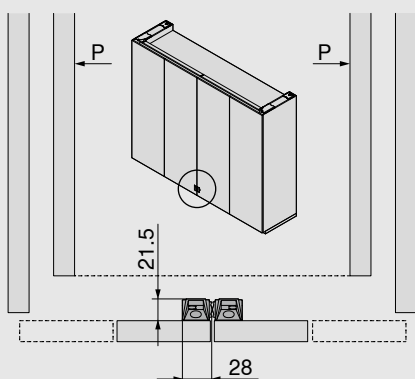

- Supports a single door against a double door, two single doors against each other or two double doors against each other

P Pocket

### Inner door support incl. tip-assist

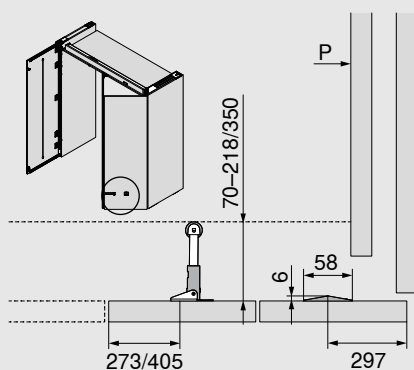


- Support on the worktop area, plinth front, cabinet, etc.
- Distance from internal cabinetry: 70–218/350 mm
- Assembly height of the door support ideally as far down as possible, however up to a maximum height of 1000 mm from the front bottom edge

P Pocket

## Planning

### Track installation dimension

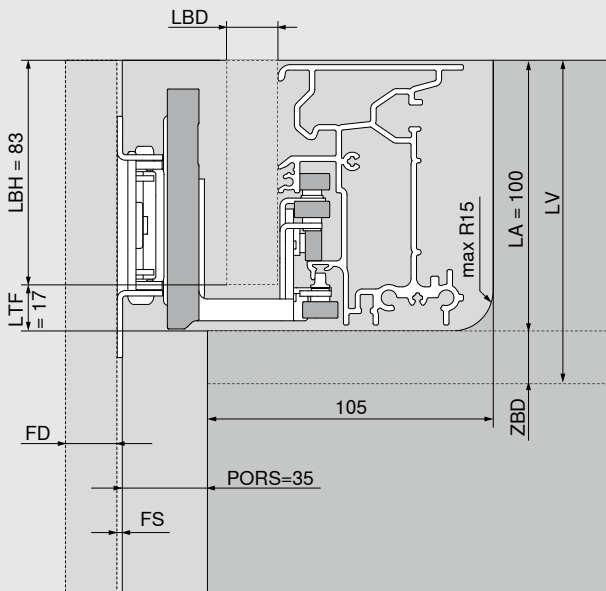

LBH = 83 mm

LBD = 15–19 mm  
(the spacer must be used  $\leq 17$  mm)

LTF = 17 mm

LA = 100 mm

LV = LA + ZBD ( $\geq 15$  mm)

- We recommend using a cross member to stabilise the fixed shelf. Minimum distance to front edge of internal pocket side = 170 mm
- A solid connection between the fixed shelf and the pocket with connector fittings is recommended for an attractive gap layout
- No mounting of add-on parts directly on the track

FD Front thickness

LA Track cut-out

LV Track installation

LBD Track cover panel thickness


LBH Track cover panel height

LTF Track gap

PORS Pocket back cut

ZBD Fixed shelf thickness

### Internal height and internal depth within the application

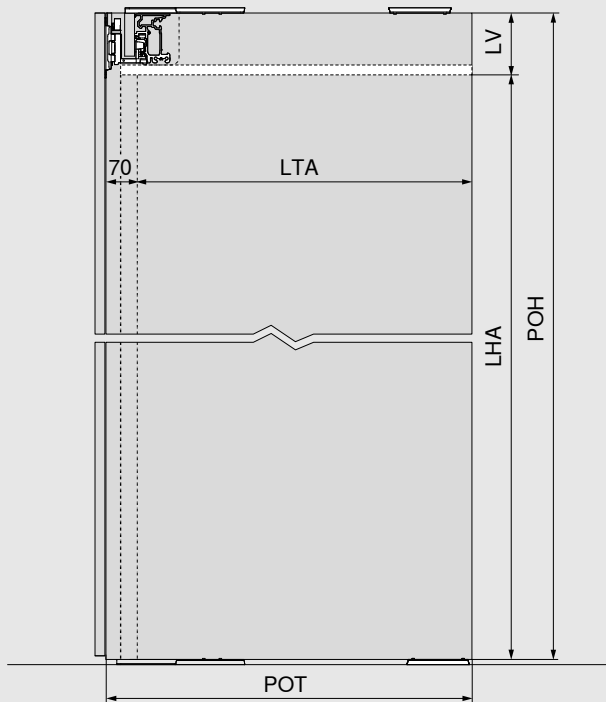

LHA = POH - LV

LTA = POT - 70 mm

- The internal height/internal depth within the application determines the maximum height/depth available for the internal cabinetry.

LHA Internal height within the application

LTA Internal depth within the application

LV Track installation

POH Pocket height

POT Pocket depth




## REVEGO duo + duo – double door right and double door left



| Space requirement                               |                                           |                                            |                                           |
|-------------------------------------------------|-------------------------------------------|--------------------------------------------|-------------------------------------------|
| Installation dimensions (mm)                    | Installation width EB                     | Installation height EH                     | Installation depth ET                     |
|                                                 | 1800–3000                                 | 1155–3012                                  | from 573                                  |
| Internal dimensions within the application (mm) | Internal width within the application LWA | Internal height within the application LHA | Internal depth within the application LTA |
|                                                 | up to 2700                                | up to 2884                                 | from 483                                  |
| Pocket dimensions (mm)                          | Pocket width POB                          | Pocket height POH                          | Pocket depth POT                          |
|                                                 | 150                                       | 1142–2999                                  | from 553                                  |
| Front dimensions (mm)                           | Front width FB                            | Front height FH                            | Front thickness FD                        |
|                                                 | 442–748                                   | 1130–2980                                  | 18–26                                     |
| Front weight FG                                 | up to 35 kg per front                     |                                            |                                           |

### Overview

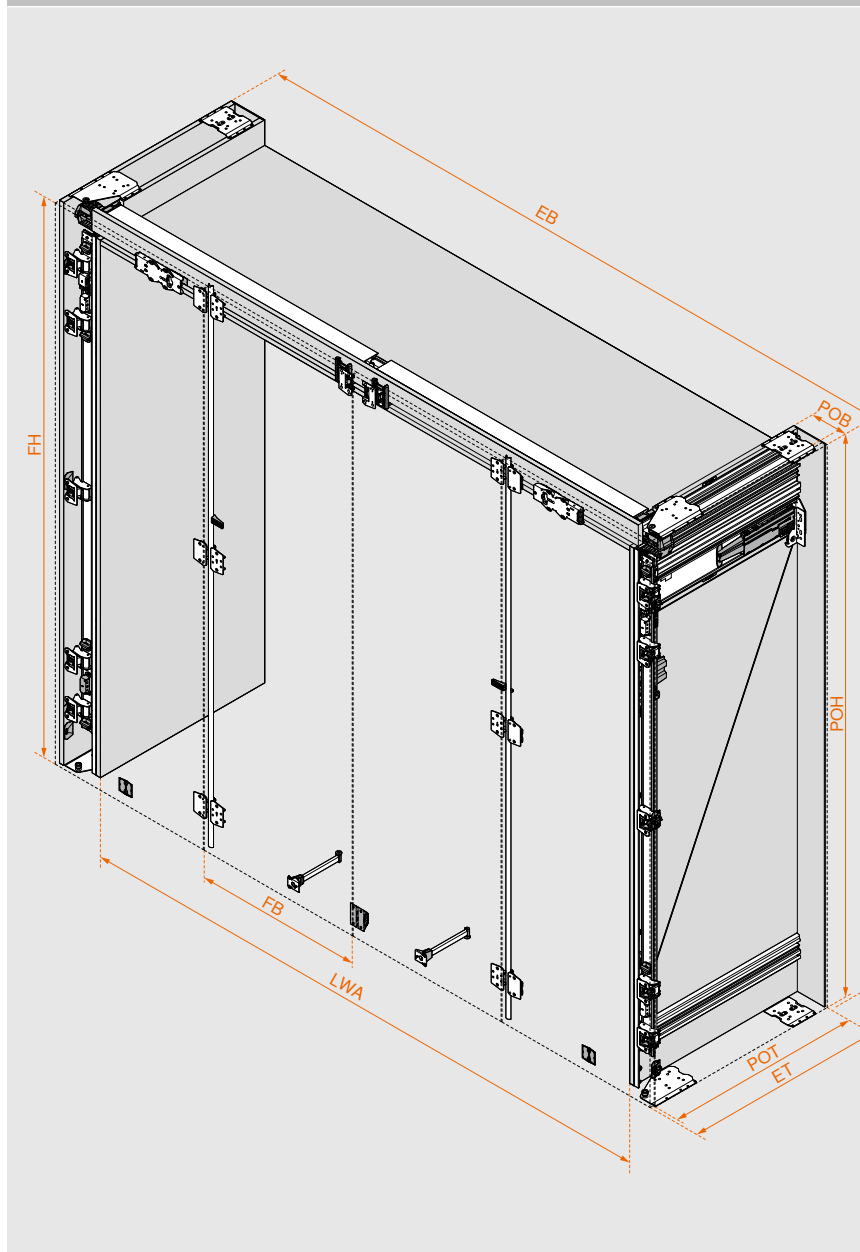

#### Fittings selection made easy

It is easy to work out the fittings and drilling positions you need using the Product Configurator.

With every product configuration, you will receive manufacturing drawings, cutting lists for wooden parts and fittings, 3D CAD data for your design software, as well as CAM programs including drilling information for direct machining on your CNC machine, in addition to the checked parts list.

Enter the web code in the Product Configurator, click on the short URL or scan the QR code. Don't have login information for digital services yet? Register here and get access free of charge.

Web code

DQIVMM




Product Configurator  
www.blum.com/rev12



Assembly and adjustment  
www.blum.com/rev6

## Component overview

### Pocket

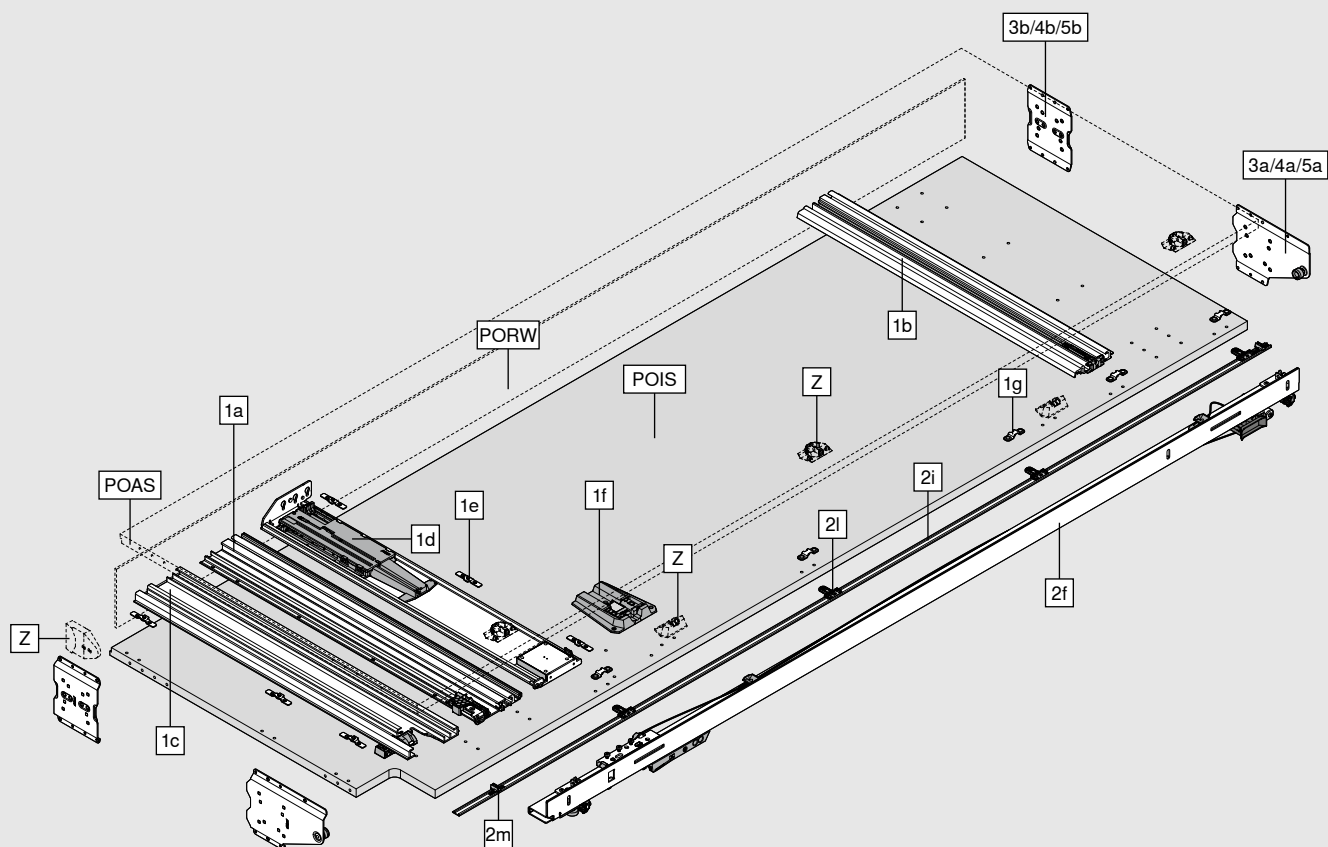


### Consisting of:

|                 |                                             |
|-----------------|---------------------------------------------|
| <b>1a</b>       | Top pocket profile                          |
| <b>1b</b>       | Bottom pocket profile                       |
| <b>1c</b>       | Roller profile                              |
| <b>1d</b>       | TIP-ON unit pocket                          |
| <b>1e</b>       | Fixing clips                                |
| <b>1f</b>       | BLUMOTION unit pocket                       |
| <b>1g</b>       | Attachment for pocket cover strip           |
| <b>2f</b>       | Hinge bracket                               |
| <b>2i</b>       | Pocket cover strip                          |
| <b>2l</b>       | Mounting for pocket cover strip             |
| <b>2m</b>       | Pocket cover strip support                  |
| <b>3a/4a/5a</b> | Front pocket connector                      |
| <b>3b/4b/5b</b> | Rear pocket connector                       |
| <b>Z</b>        | Adapter for electrical appliance switch-off |
|                 | Scuff guard                                 |
| <b>POAS</b>     | External pocket side                        |
| <b>POIS</b>     | Internal pocket side                        |
| <b>PORW</b>     | Pocket back                                 |

## Component overview

### Front

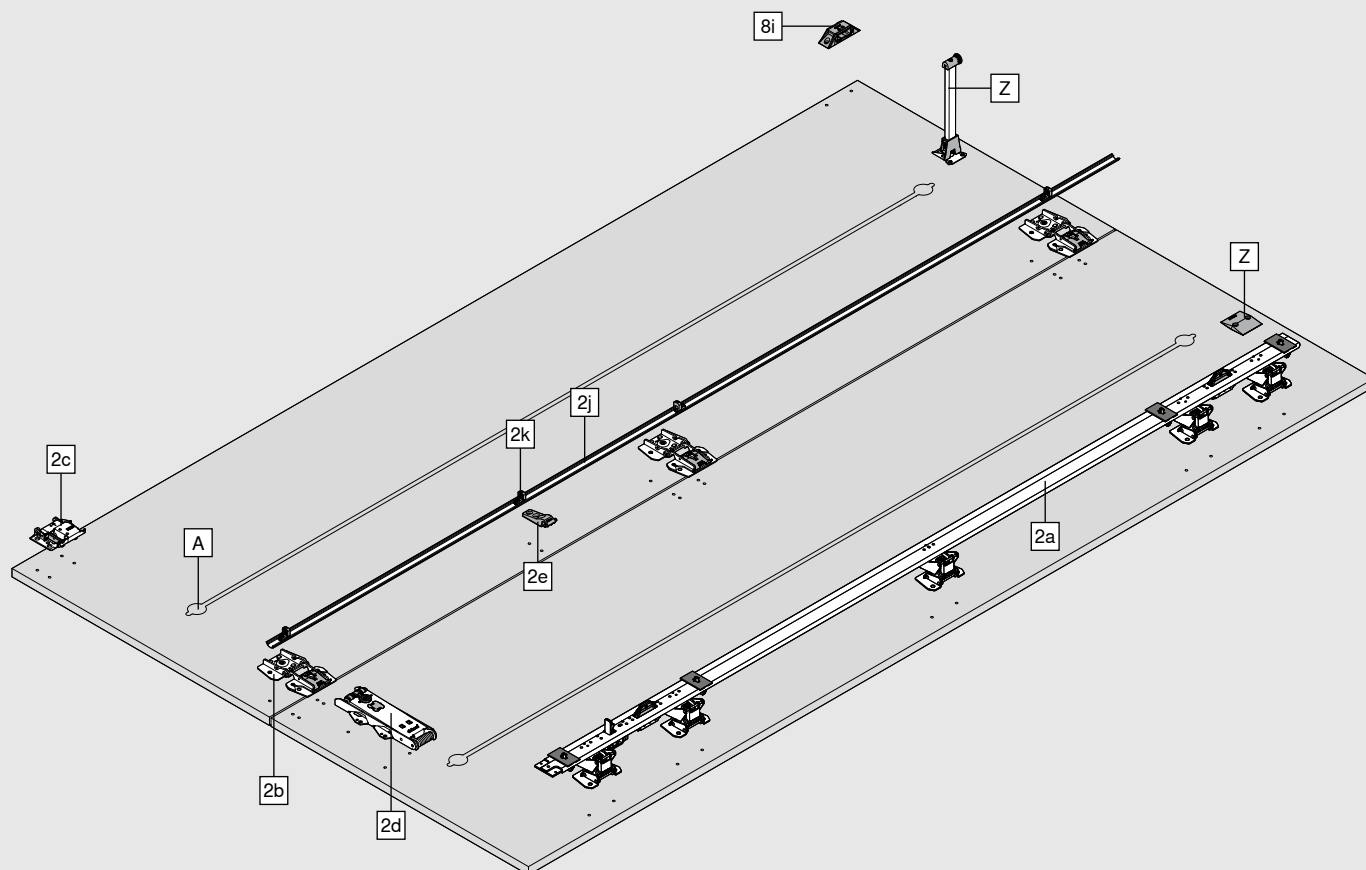


#### Consisting of:

|    |                                     |
|----|-------------------------------------|
| 2a | Hinge strip                         |
| 2b | Centre hinge                        |
| 2c | Roller carriage hinge               |
| 2d | TIP-ON unit door                    |
| 2e | Support for door cover strip        |
| 2j | Door cover strip                    |
| 2k | Mounting for door cover strip       |
| 8i | Inter-door support                  |
| Z  | Inner door support incl. tip-assist |

A We recommend at least one alignment fitting per front with a maximum installation height of 20 mm.  
The space available between the pair of folding fronts is 20 mm.

## Component overview

### Track

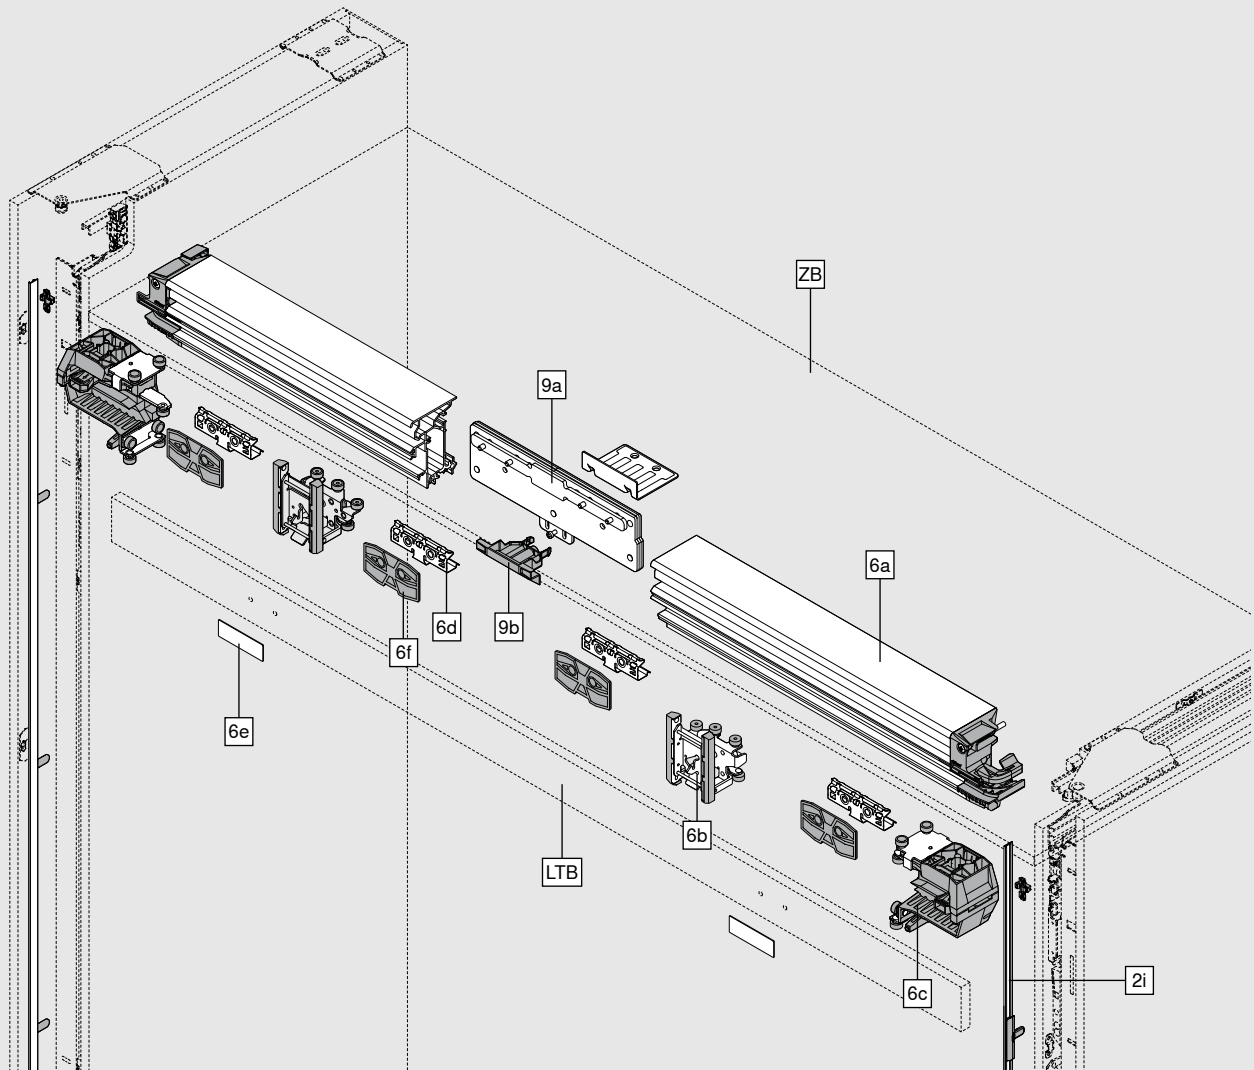

### Consisting of:

|     |                                    |
|-----|------------------------------------|
| 2i  | Pocket cover strip incl. mounting  |
| 6a  | Track                              |
| 6b  | Roller carriage                    |
| 6c  | Roller carriage transporter        |
| 6d  | Mounting for track cover panels    |
| 6e  | Catch plate                        |
| 6f  | Spacer                             |
| 9a  | Track connection                   |
| 9b  | Cover for track connection         |
| 9c  | Support angle for depth adjustment |
| LTB | Track cover panel                  |
| ZB  | Fixed shelf                        |

## Ordering information

| 1                                                                                 | Pocket profile set with TIP-ON |                             |             |             |
|-----------------------------------------------------------------------------------|--------------------------------|-----------------------------|-------------|-------------|
|  | Nominal length NL (mm)         | Min. pocket depth POT* (mm) | Left        | Right       |
|                                                                                   | 450                            | 550                         | 802P450D.L3 | 802P450D.R3 |
|                                                                                   | 525                            | 625                         | 802P525D.L3 | 802P525D.R3 |
|                                                                                   | 600                            | 700                         | 802P600D.L3 | 802P600D.R3 |
|                                                                                   | 675                            | 775                         | 802P675D.L3 | 802P675D.R3 |
|                                                                                   | 750                            | 850                         | 802P750D.L3 | 802P750D.R3 |

\* Specification without pocket back. A back construction with a thickness of at least 3 mm is required.  
Pocket and roller profiles as well as TIP-ON unit pocket can be shortened to any nominal length.

### Consisting of:

|    |     |                                   |
|----|-----|-----------------------------------|
| 1a | 1 x | Top pocket profile                |
| 1b | 1 x | Bottom pocket profile             |
| 1c | 1 x | Roller profile                    |
| 1d | 1 x | TIP-ON unit pocket                |
| 1e | 6 x | Fixing clips                      |
| 1f | 1 x | BLUMOTION unit pocket             |
| 1g | 5 x | Attachment for pocket cover strip |

Order set for each double door, 1x left and 1x right

| 2                                                                                   | Hinge bracket set with TIP-ON |  |             |             |
|-------------------------------------------------------------------------------------|-------------------------------|--|-------------|-------------|
|  | Pocket height (mm)            |  | Left        | Right       |
|                                                                                     | 1142–1356                     |  | 802T1140.L3 | 802T1140.R3 |
|                                                                                     | 1357–1506                     |  | 802T1350.L3 | 802T1350.R3 |
|                                                                                     | 1507–1656                     |  | 802T1500.L3 | 802T1500.R3 |
|                                                                                     | 1657–1806                     |  | 802T1650.L3 | 802T1650.R3 |
|                                                                                     | 1807–1956                     |  | 802T1800.L3 | 802T1800.R3 |
|                                                                                     | 1957–2106                     |  | 802T1950.L3 | 802T1950.R3 |
|                                                                                     | 2107–2256                     |  | 802T2100.L3 | 802T2100.R3 |
|                                                                                     | 2257–2406                     |  | 802T2250.L3 | 802T2250.R3 |
|                                                                                     | 2407–2556                     |  | 802T2400.L3 | 802T2400.R3 |
|                                                                                     | 2557–2706                     |  | 802T2550.L3 | 802T2550.R3 |
|                                                                                     | 2707–2856                     |  | 802T2700.L3 | 802T2700.R3 |
|                                                                                     | 2857–2999                     |  | 802T2850.L3 | 802T2850.R3 |

Cover strips must be shortened to the required length

### Consisting of:

|    |       |                                    |
|----|-------|------------------------------------|
| 2a | 1 x   | Hinge strip                        |
| 2b | 3 x   | Centre hinge                       |
| 2c | 1 x   | Roller carriage hinge              |
| 2d | 1 x   | TIP-ON unit door                   |
| 2e | 1 x   | Support for door cover strip       |
| 2f | 1 x   | Hinge bracket                      |
| 2i | 1 x   | Pocket cover strip, black anodised |
| 2j | 1 x   | Door cover strip, black anodised   |
| 2k | 4 x   | Mounting for door cover strip      |
| 2l | 2–4 x | Mountings for pocket cover strip   |
| 2m | 1 x   | Pocket cover strip support         |

Order set for each double door, 1x left and 1x right

## Ordering information

| Pocket connector set                                                              |                            |                        |        |          |
|-----------------------------------------------------------------------------------|----------------------------|------------------------|--------|----------|
| 3                                                                                 | Application with plinth    |                        |        |          |
|  | Pocket side thickness (mm) |                        | Colour |          |
|                                                                                   | 15–17                      |                        | Black  | 802V560B |
|                                                                                   | 18–19                      |                        | Black  | 802V580B |
| Pocket connector top + bottom: POVH 10 mm for 0–6 mm gap                          |                            |                        |        |          |
| POVH Pocket connector height                                                      |                            |                        |        |          |
| Consisting of:                                                                    |                            |                        |        |          |
| 3a                                                                                | 2 x                        | Front pocket connector |        |          |
| 3b                                                                                | 2 x                        | Rear pocket connector  |        |          |
| Order 1 set per double door                                                       |                            |                        |        |          |

| Pocket connector set                                                              |                            |                        |        |             |             |
|-----------------------------------------------------------------------------------|----------------------------|------------------------|--------|-------------|-------------|
| 4                                                                                 | Application without plinth |                        |        |             |             |
|  | Pocket side thickness (mm) |                        | Colour | Left        | Right       |
|                                                                                   | 15–17                      |                        | Black  | 802V660B.L1 | 802V660B.R1 |
|                                                                                   | 18–19                      |                        | Black  | 802V680B.L1 | 802V680B.R1 |
| Top pocket connector: POVH 10 mm for 0–6 mm gap                                   |                            |                        |        |             |             |
| Bottom pocket connector: POVH 3 mm for gap from 7–13 mm                           |                            |                        |        |             |             |
| POVH Pocket connector height                                                      |                            |                        |        |             |             |
| Consisting of:                                                                    |                            |                        |        |             |             |
| 4a                                                                                | 2 x                        | Front pocket connector |        |             |             |
| 4b                                                                                | 2 x                        | Rear pocket connector  |        |             |             |
| Order set for each double door, 1x left and 1x right                              |                            |                        |        |             |             |

| Pocket connector set                                                                |                                     |                        |        |             |             |
|-------------------------------------------------------------------------------------|-------------------------------------|------------------------|--------|-------------|-------------|
| 5                                                                                   | Worktop-mounted cabinet application |                        |        |             |             |
|  | Pocket side thickness (mm)          |                        | Colour | Left        | Right       |
|                                                                                     | 15–17                               |                        | Black  | 802V760B.L3 | 802V760B.R3 |
|                                                                                     | 18–19                               |                        | Black  | 802V780B.L3 | 802V780B.R3 |
| Top pocket connector: POVH 10 mm for 0–6 mm gap                                     |                                     |                        |        |             |             |
| Bottom pocket connector: POVH 3 mm for gap from 3–6 mm                              |                                     |                        |        |             |             |
| POVH Pocket connector height                                                        |                                     |                        |        |             |             |
| Consisting of:                                                                      |                                     |                        |        |             |             |
| 5a                                                                                  | 2 x                                 | Front pocket connector |        |             |             |
| 5b                                                                                  | 2 x                                 | Rear pocket connector  |        |             |             |
| Order set for each double door, 1x left and 1x right                                |                                     |                        |        |             |             |

## Ordering information


| 6                                                                                  |                      | Track set                                  |                |             |             |
|------------------------------------------------------------------------------------|----------------------|--------------------------------------------|----------------|-------------|-------------|
|    | LWA double door (mm) |                                            | Colour         | Left        | Right       |
|                                                                                    | 1050                 |                                            | Black anodised | 802L1050DL3 | 802L1050DR3 |
|                                                                                    | 1200                 |                                            | Black anodised | 802L1200DL3 | 802L1200DR3 |
|                                                                                    | 1250                 |                                            | Black anodised | 802L1250DL3 | 802L1250DR3 |
|                                                                                    | 1350                 |                                            | Black anodised | 802L1350DL3 | 802L1350DR3 |
| Track can be shortened to any length.                                              |                      |                                            |                |             |             |
| LWA Internal width within the application                                          |                      |                                            |                |             |             |
| Consisting of:                                                                     |                      |                                            |                |             |             |
| 6a                                                                                 | 1 x                  | Track                                      |                |             |             |
| 6b                                                                                 | 1 x                  | Roller carriage                            |                |             |             |
| 6c                                                                                 | 1 x                  | Roller carriage transporter                |                |             |             |
| 6d                                                                                 | 2 x                  | Mounting for track cover panels            |                |             |             |
| 6e                                                                                 | 1 x                  | Catch plate, black                         |                |             |             |
| 6f                                                                                 | 2 x                  | Spacer                                     |                |             |             |
| Order set for each double door, 1x left and 1x right                               |                      |                                            |                |             |             |
| 9                                                                                  |                      | Assembly set for two double doors combined |                |             |             |
|  | Colour               |                                            |                |             |             |
|                                                                                    | Black                |                                            |                |             | 802M0004.03 |
|                                                                                    |                      |                                            |                |             |             |
| Consisting of:                                                                     |                      |                                            |                |             |             |
| 9a                                                                                 | 1 x                  | Track connection                           |                |             |             |
| 9b                                                                                 | 1 x                  | Cover for track connection                 |                |             |             |
| 9c                                                                                 | 1 x                  | Support angle for depth adjustment         |                |             |             |
| 9e                                                                                 | 1 x                  | Inter-door support (right + left)          |                |             |             |

## Ordering information

| Z Accessories                                                                       |                                                                                                                                             |             |
|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|-------------|
| Inner door support incl. tip-assist                                                 |                                                                                                                                             |             |
|    | Support length up to 218 mm                                                                                                                 | 802ZA030    |
|                                                                                     | Support length up to 350 mm                                                                                                                 | 802ZA031    |
| For additional support on the worktop area, plinth front, cabinet, etc.             |                                                                                                                                             |             |
| Adapter for electrical appliance switch-off                                         |                                                                                                                                             |             |
|    |                                                                                                                                             | 802ZG0CS    |
|                                                                                     | Suitable exclusively for electrical appliance switch-off with magnetic contact (part number 3623011) from Halemeier GmbH (www.halemeier.de) |             |
|                                                                                     | Liability disclaimer: Blum does not accept any liability for the function of the electrical appliance switch-off                            |             |
| Consisting of:                                                                      |                                                                                                                                             |             |
| 1 x                                                                                 | Contact switch adapter                                                                                                                      |             |
| 1 x                                                                                 | Ring magnet with catch plate                                                                                                                |             |
| 4 x                                                                                 | M4x12 countersunk screws for contact switch adapter                                                                                         |             |
| 2 x                                                                                 | M4x5 round head screws for contact switch adapter                                                                                           |             |
| Scuff guard                                                                         |                                                                                                                                             |             |
|   | For front thicknesses starting from 23 mm                                                                                                   | 802ZA00S    |
|                                                                                     | For front thicknesses less than 23 mm, the scuff guard can be used as additional front protection                                           |             |
| Consisting of:                                                                      |                                                                                                                                             |             |
| 3 x                                                                                 | External pocket side scuff guard                                                                                                            |             |
| 2 x                                                                                 | Internal pocket side scuff guard                                                                                                            |             |
| Screws                                                                              |                                                                                                                                             |             |
|  | 6 x 14.5 mm system screws, nickel plated                                                                                                    | 661.1450.HG |
|                                                                                     | 4 x 35 mm chipboard screws, nickel plated                                                                                                   | 664.3500    |
| Pocket connector                                                                    |                                                                                                                                             |             |
|  | Rear pocket connector, pocket connector height (POVH) 10 mm                                                                                 | 802V5002    |
|                                                                                     | Additional pocket connector for set-back plinth leg                                                                                         |             |
| EXPANDO T – for thin fronts                                                         |                                                                                                                                             |             |
|  | EXPANDO T – single                                                                                                                          | 70T4532T    |
|                                                                                     | EXPANDO T suitable for thin fronts – see page 81                                                                                            |             |
| For front thicknesses less than 18 mm, we recommend a trial application             |                                                                                                                                             |             |
| Screws are not included in the scope of delivery                                    |                                                                                                                                             |             |




## Planning

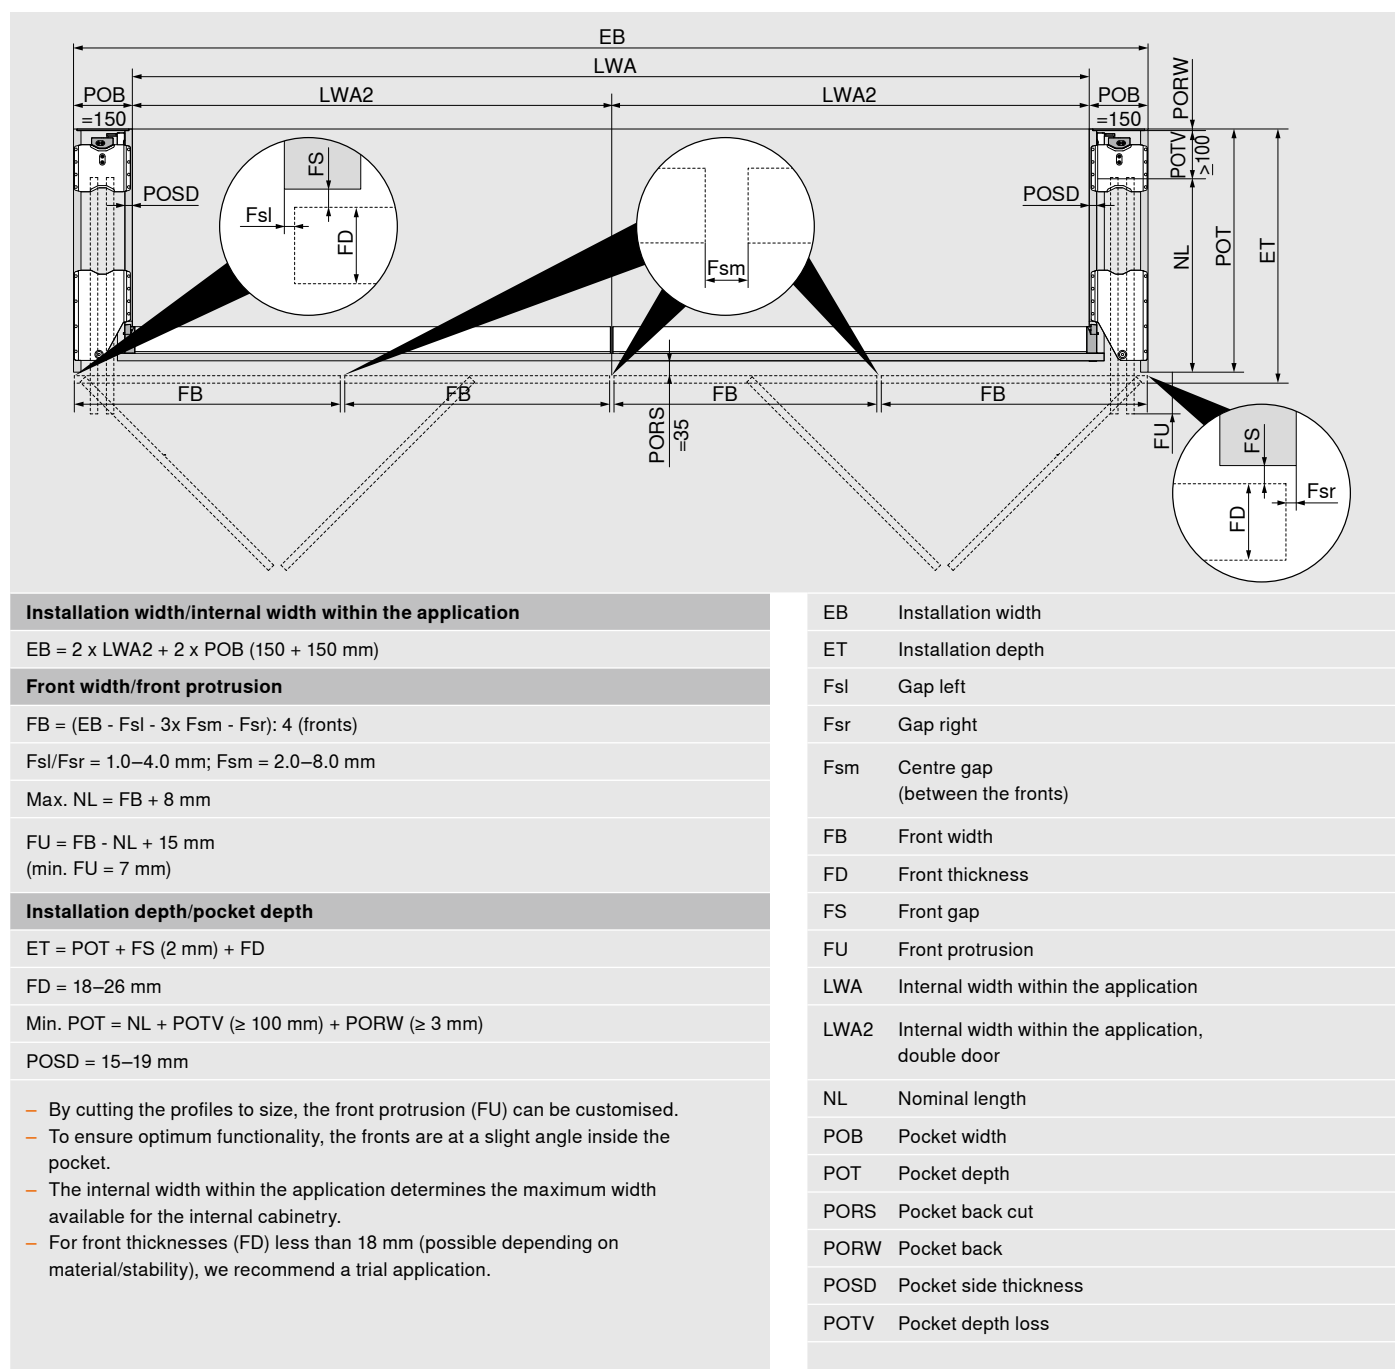


### Minimum side gap

#### Pocket to pocket/adjacent cabinet

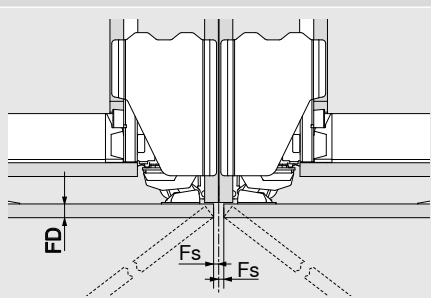

#### Pocket to wall/decor panel

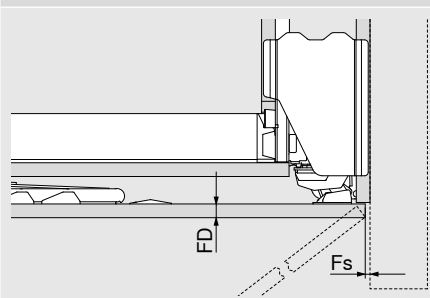

#### FD (mm)

#### Min. Fs (mm)

|         |     |
|---------|-----|
| 18–20   | 2   |
| 20.1–23 | 2.5 |
| 23.1–26 | 3   |

For free-standing applications, Fs must be minimum 1 mm

|    |                 |
|----|-----------------|
| FD | Front thickness |
| Fs | Side gap        |

Planning

**Installation height, front height**

**Application with plinth**

$FH = POH - Fo - Fu$

$EH = POH + POVH \text{ top and bottom}$

POVH 10 mm: gap 0–6 mm

- Take into account that the pocket must be tilted during installation.
- Minimum distance to the next movable element above 3 mm, for non-movable elements a front insertion space of 6 mm must be taken into account
- The pocket connector height must be taken into account during planning
- Minimum plinth height 80 mm

|      |                         |
|------|-------------------------|
| EH   | Installation height     |
| Fo   | Top gap                 |
| Fu   | Bottom gap              |
| FH   | Front height            |
| POH  | Pocket height           |
| POVH | Pocket connector height |

**Application with set-back plinth**

**Additional rear pocket connector**

**Installation height, front height**

**Application without plinth**

$FH = POH - Fo - Fu$

$EH = POH + POVH \text{ top and bottom}$

POVH top 10 mm: gap 0–6 mm

POVH bottom 3 mm: gap from 7–13 mm


- Take into account that the pocket must be tilted during installation.
- Minimum distance from the bottom front edge to the floor or next element below is 10 mm
- Minimum distance to the next movable element above 3 mm, for non-movable elements a front insertion space of 6 mm must be taken into account
- The pocket connector height must be taken into account during planning

|      |                         |
|------|-------------------------|
| EH   | Installation height     |
| Fo   | Top gap                 |
| Fu   | Bottom gap              |
| FH   | Front height            |
| POH  | Pocket height           |
| POVH | Pocket connector height |

## Planning

### Installation height, front height

#### Worktop-mounted cabinet application

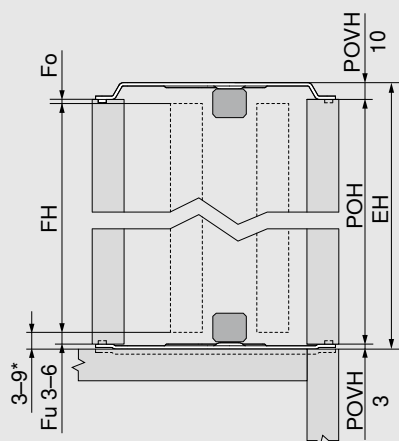

\* If the distance between the front and the next element below is < 6 mm, the pocket connector must be embedded in the worktop

$$FH = POH - FO - FU$$

$$EH = POH + POVH \text{ top and bottom}$$

POVH top 10 mm: gap 0–6 mm

POVH bottom 3 mm: gap from 3–6 mm

- Take into account that the pocket must be tilted during installation.
- Minimum distance between front and next element below with flush front/worktop is 3 mm
- Minimum distance between front and next element below with protruding front (e.g. protruding worktop) is 6 mm
- Minimum distance to the next movable element above 3 mm, for non-movable elements a front insertion space of 6 mm must be taken into account
- A trial application is recommended in the edge areas
- The pocket connector height must be taken into account during planning
- The distance between the front and the next element above and below is made up of  $Fu$  or  $Fo + POVH$

EH Installation height

FO Top gap

FU Bottom gap

FH Front height

POH Pocket height

POVH Pocket connector height

#### Max. front weights for worktop-mounted cabinets in kg per front

| Front height FH (mm) | Front width FB (mm) |     |     |     |     |     |     |
|----------------------|---------------------|-----|-----|-----|-----|-----|-----|
|                      | 450                 | 500 | 550 | 600 | 650 | 700 | 750 |
| 1130–1349            | 22                  | 20  | 18  | 16  | 15  | 14  | 13  |
| 1350–1499            | 23                  | 21  | 19  | 18  | 17  | 16  | 15  |
| 1500–1649            | 25                  | 23  | 21  | 19  | 18  | 17  | 16  |
| 1650–1803            | 27                  | 25  | 23  | 21  | 20  | 19  | 18  |

#### Note

- The max. pocket height when planning a worktop-mounted cabinet is 1806 mm

# Planning

Inner door support

- Support on the worktop area, plinth front, cabinet, etc.
- Distance from internal cabinetry: 70–218/350 mm
- Assembly height of the door support ideally as far down as possible, however up to a maximum height of 1000 mm from the front bottom edge

P Pocket

Inter-door support

- Supports a single door against a double door, two single doors against each other or two double doors against each other

P Pocket

Track installation dimension

LBH = 83 mm

LBD = 15–19 mm  
(the spacer must be used ≤ 17 mm)

LTF = 17 mm

LA = 100 mm

LV = LA + ZBD (≥ 15 mm)

- We recommend using a cross member to stabilise the fixed shelf. Minimum distance to front edge of internal pocket side = 170 mm
- A solid connection between the fixed shelf and the pocket with connector fittings is recommended for an attractive gap layout
- No mounting of add-on parts directly on the track

FD Front thickness

LA Track cut-out

LV Track installation

LBD Track cover panel thickness

LBH Track cover panel height

LTF Track gap

PORS Pocket back cut

ZBD Fixed shelf thickness

Internal height and internal depth within the application

LHA = POH - LV

LTA = POT - 70 mm

- The internal height/internal depth within the application determines the maximum height/depth available for the internal cabinetry


LHA Internal height within the application

LTA Internal depth within the application

LV Track installation

POH Pocket height

POT Pocket depth

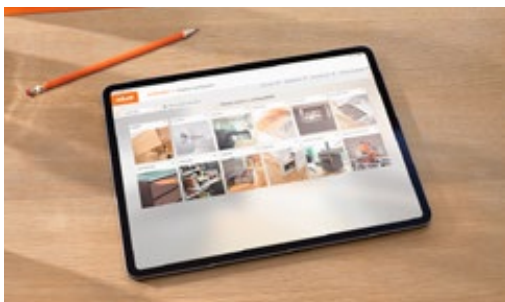

### Product Configurator

Obtain the exact calculation for assembling the cut-to-size profiles quickly and efficiently using the Product Configurator. The configurator calculates all the dimensions for each configuration and also outputs them as drawings.




[www.blum.com/rev1](http://www.blum.com/rev1)

## Calculations and assembly of the profiles

### REVEGO duo | Double door

#### Pocket cover strip, door cover strip

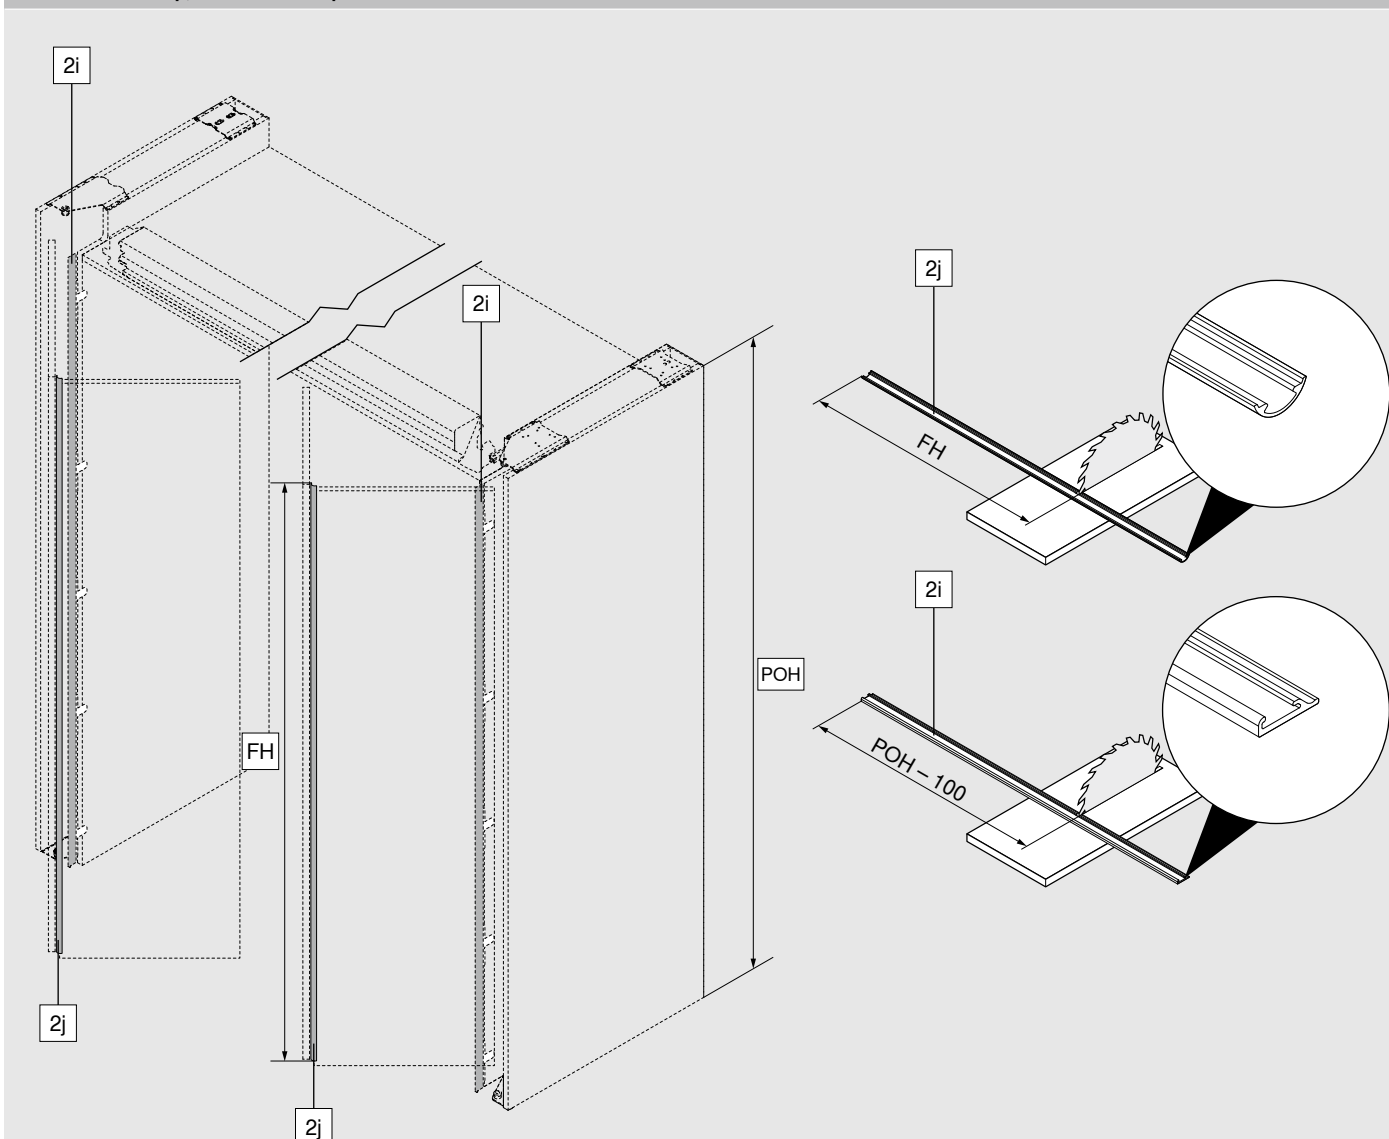


|     |                    |
|-----|--------------------|
| FH  | Front height       |
| POH | Pocket height      |
| 2i  | Pocket cover strip |
| 2j  | Door cover strip   |

## Calculations and assembly of the profiles

### REVEGO duo | Double door

#### Roller profile, pocket profile, TIP-ON unit pocket

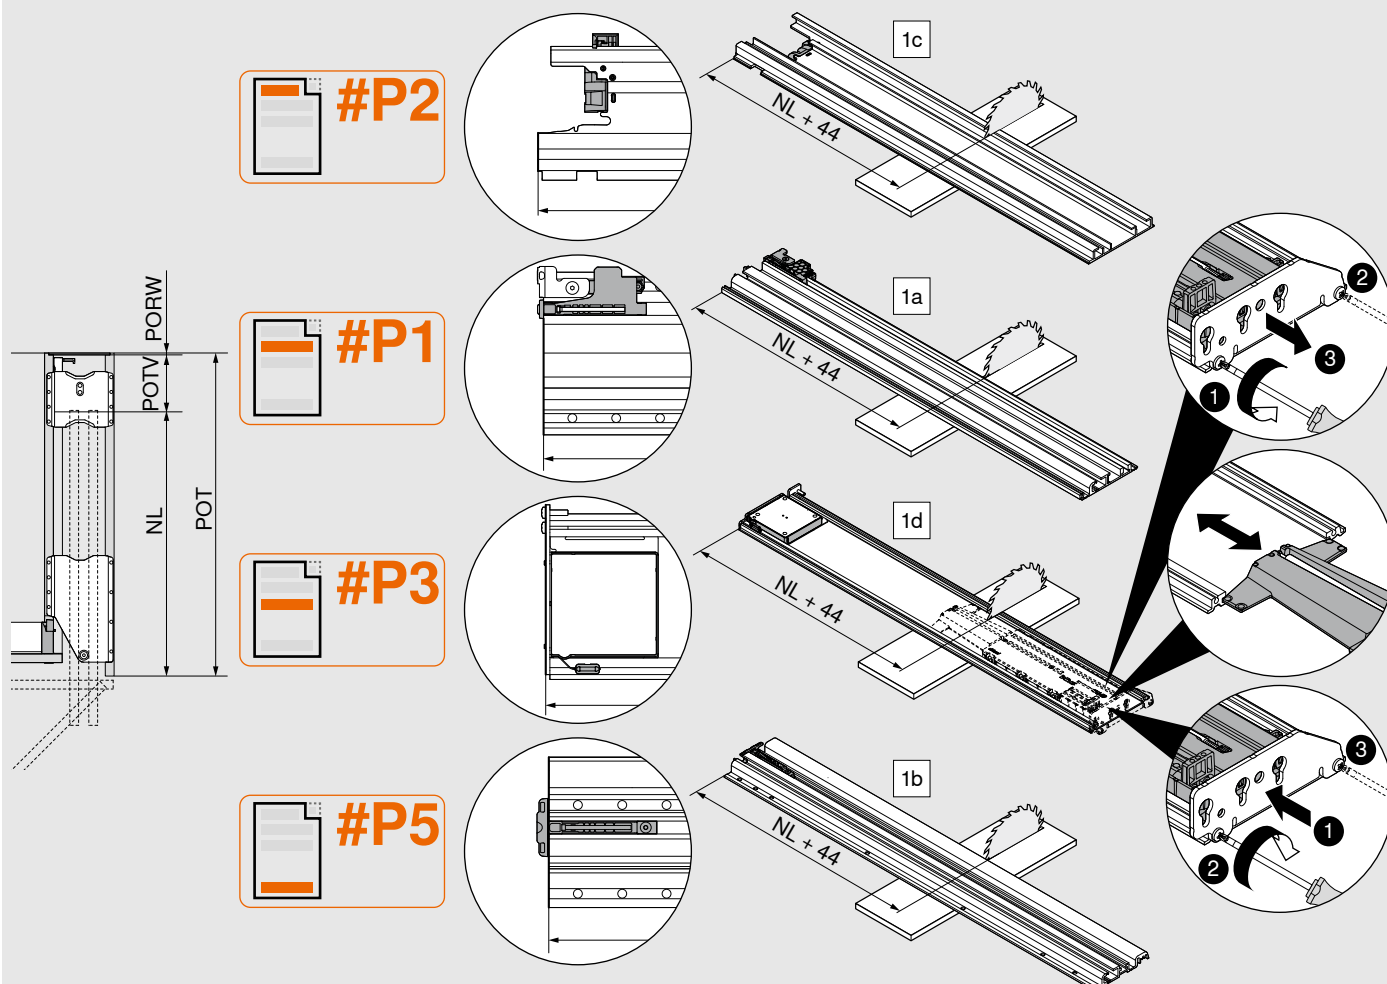

$$NL = POT - POTV - PORW$$

|     |    |                       |
|-----|----|-----------------------|
| #P1 | 1a | Top pocket profile    |
| #P2 | 1c | Roller profile        |
| #P3 | 1d | TIP-ON unit pocket    |
| #P5 | 1b | Bottom pocket profile |

|      |                   |
|------|-------------------|
| NL   | Nominal length    |
| POT  | Pocket depth      |
| PORW | Pocket back       |
| POTV | Pocket depth loss |


#### Note

- Pocket and roller profiles as well as TIP-ON unit pocket must not be damaged during cutting to size.
- Pocket and roller profiles as well as TIP-ON unit pocket must be cleaned to remove any dirt and deburred before installation.

## Calculations and assembly of the profiles

### REVEGO uno | Single door

#### Pocket cover strip

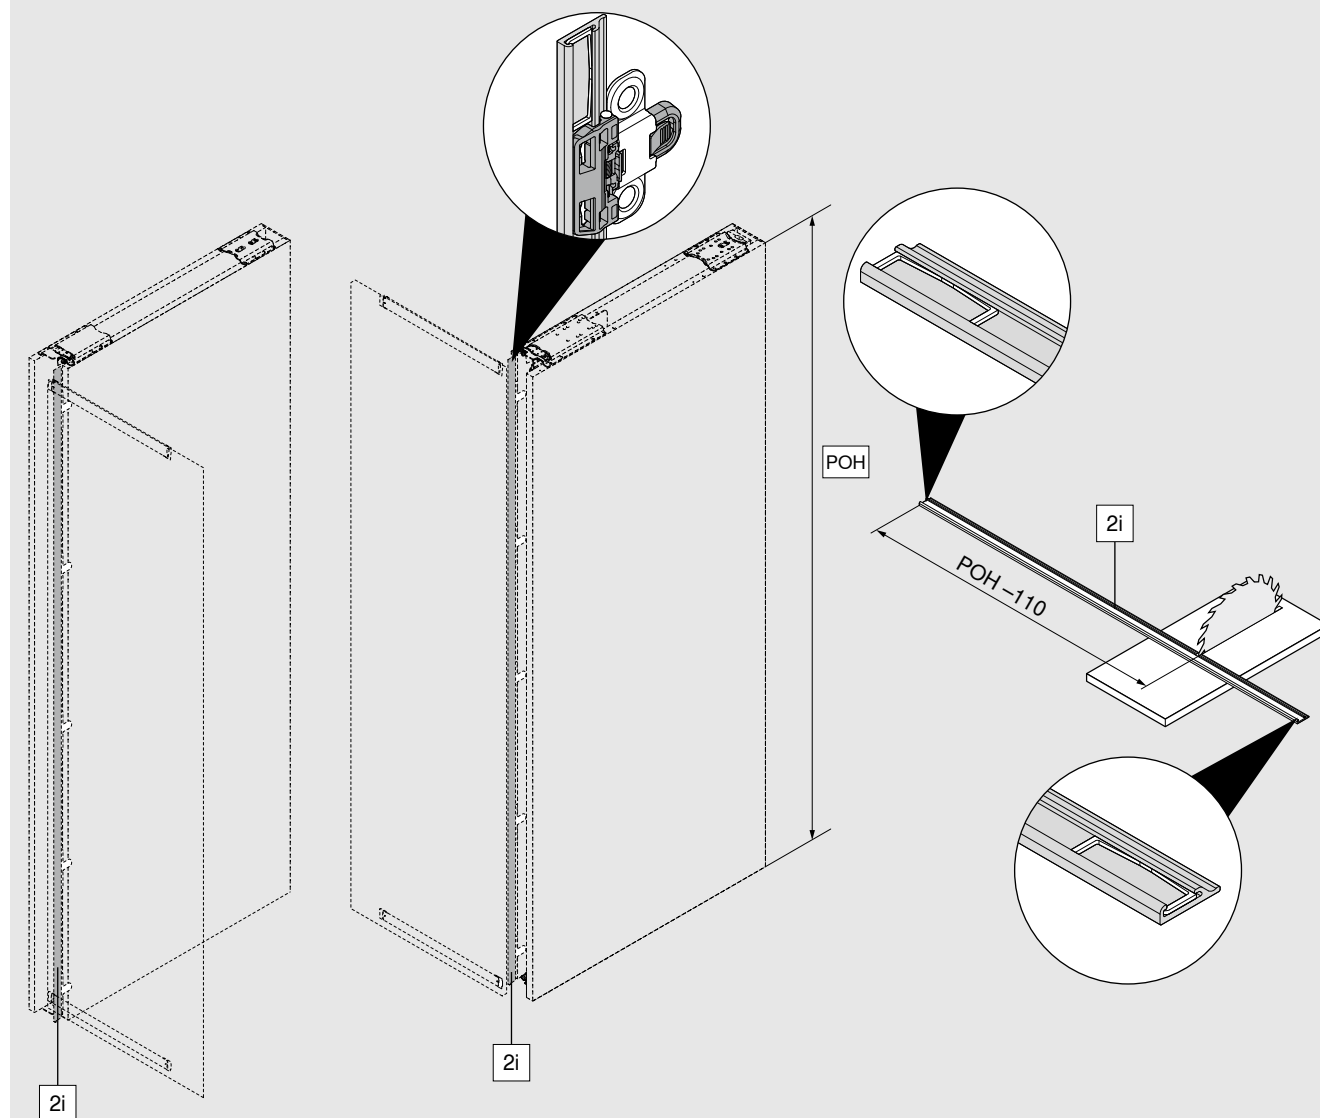


|     |                    |
|-----|--------------------|
| POH | Pocket height      |
| 2i  | Pocket cover strip |

## Calculations and assembly of the profiles

### REVEGO uno | Single door

#### Pocket profile, TIP-ON unit pocket, door stabiliser

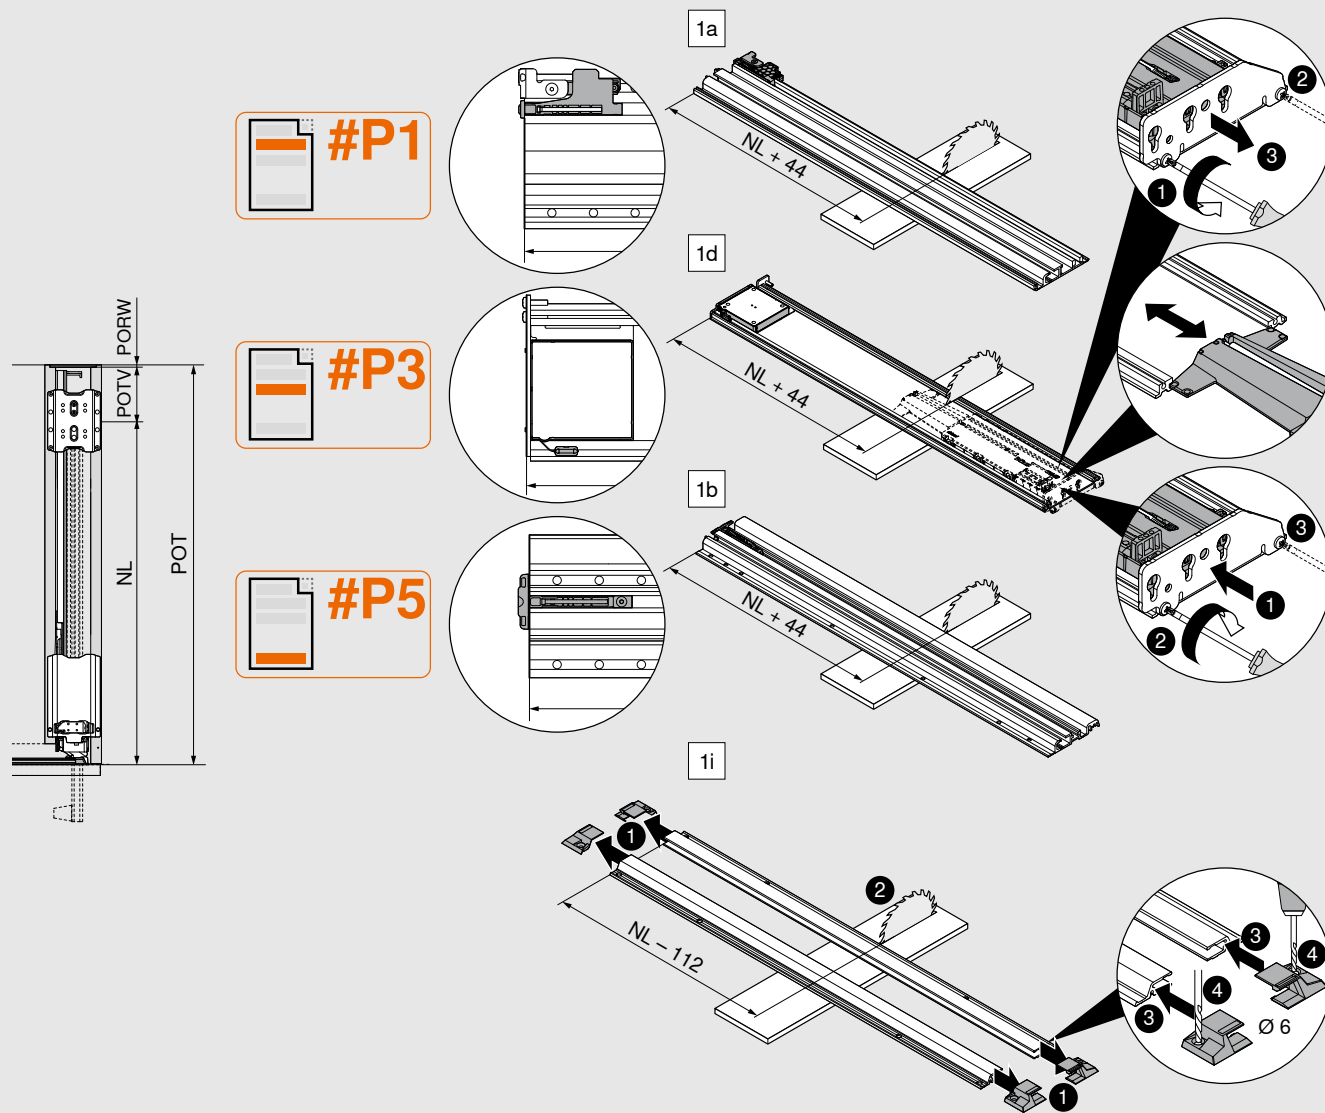

$$NL = POT - POTV - PORW$$

|     |    |                       |
|-----|----|-----------------------|
| #P1 | 1a | Top pocket profile    |
| #P3 | 1d | TIP-ON unit pocket    |
| #P5 | 1b | Bottom pocket profile |
|     | 1i | Door stabiliser       |

|      |                   |
|------|-------------------|
| NL   | Nominal length    |
| POT  | Pocket depth      |
| PORW | Pocket back       |
| POTV | Pocket depth loss |

#### Note


- Pocket profiles, TIP-ON unit pocket and door stabiliser must not be damaged during cutting to size.
- Pocket profiles, TIP-ON unit pocket and door stabiliser must be cleaned to remove any dirt and deburred before installation.



## Calculations and assembly of the profiles

### REVEGO duo | Double door

#### Track, track extension

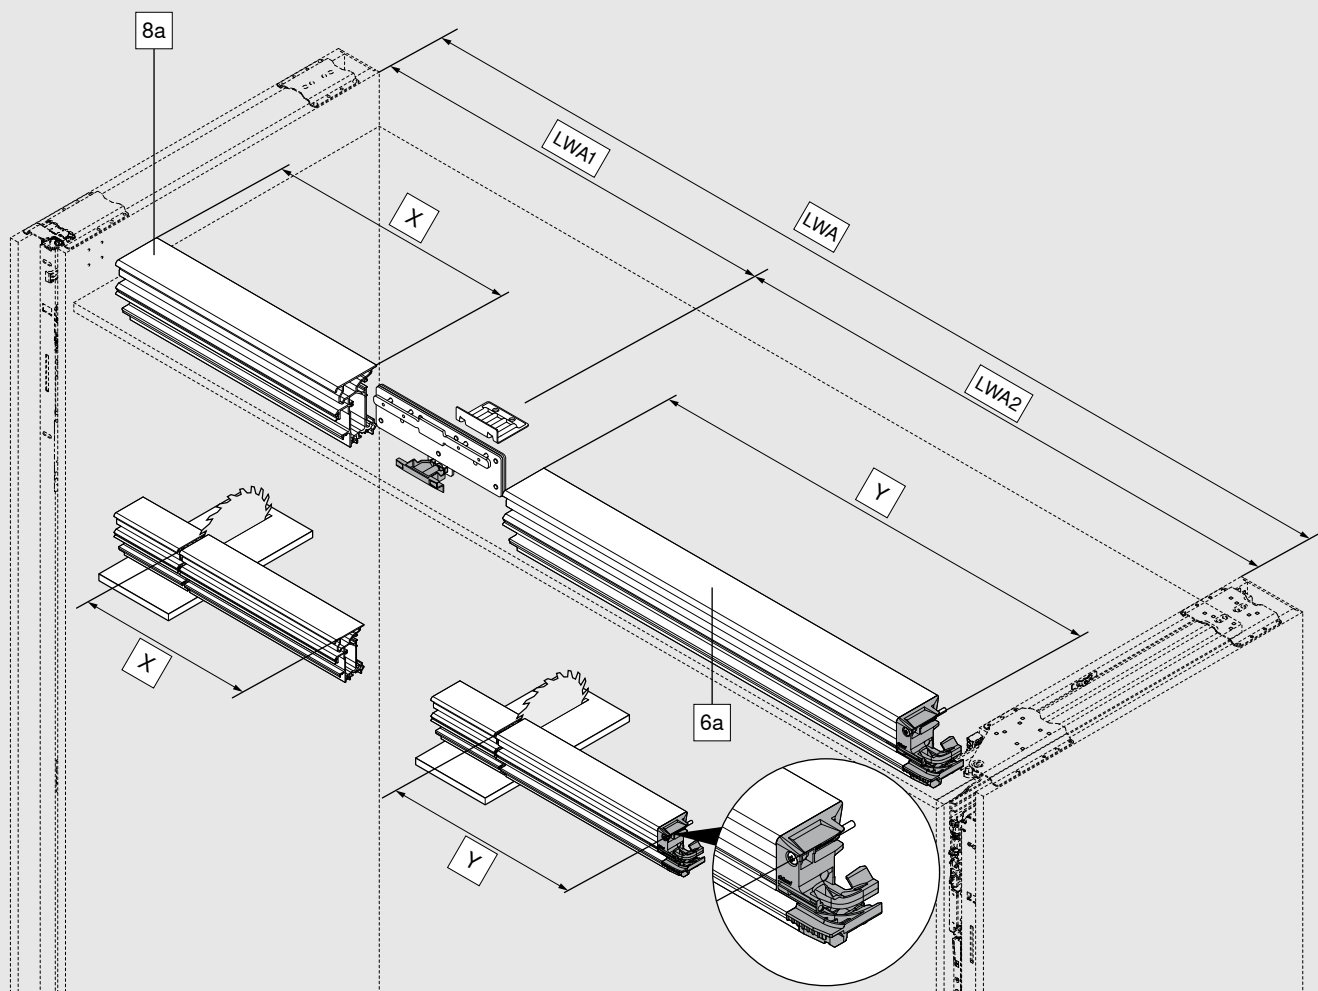

| Application      | X            | Y            |
|------------------|--------------|--------------|
| REVEGO duo       | –            | LWA - 12 mm  |
| REVEGO uno + duo | LWA1 - 58 mm | LWA2 - 12 mm |
| REVEGO duo + duo | –            | LWA2 - 12 mm |

|      |                                                    |
|------|----------------------------------------------------|
| LWA  | Internal width within the application              |
| LWA1 | Internal width within the application, single door |
| LWA2 | Internal width within the application, double door |
| 6a   | Track                                              |
| 8a   | Track extension                                    |

## EXPANDO T




- EXPANDO T – fixing system
- Thin fronts measuring 8 mm or more
- Different front materials

### EXPANDO T – single

|  |               |                 |          |
|--|---------------|-----------------|----------|
|  | <b>Colour</b> | <b>Material</b> |          |
|  | Dark grey     | Nylon/steel     | 70T4532T |

### Drilling depth | Screw selection – EXPANDO T

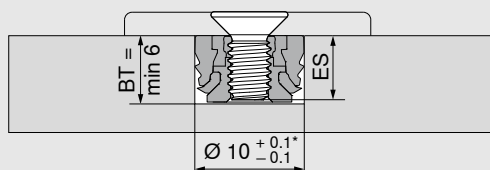

Screws with M4 thread have to be used for EXPANDO T single

Select the lowest possible drilling depth to suit the screw length when using the single dowel

BT Drilling depth


ES Screw penetration depth

ES min. = 4 mm

ES max. = BT - 0.5 mm

\* Stone and ceramic +0.2/-0.1 mm

### Assembly – EXPANDO T

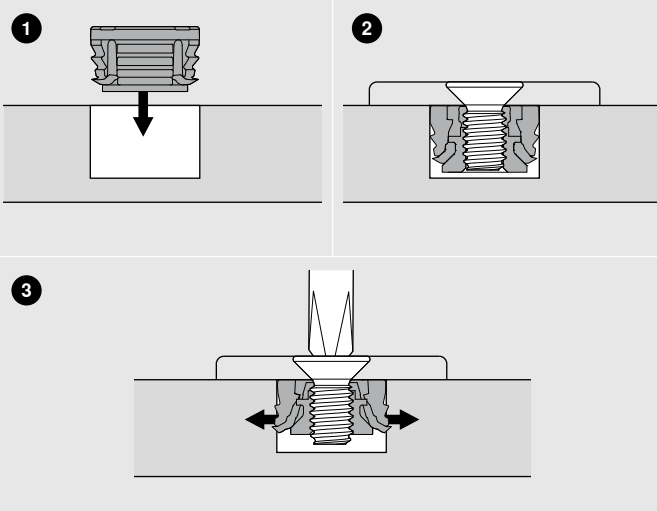

### Area of application and assembly recommendation

EXPANDO T is suitable for fixing Blum fittings to thin cabinet fronts of all types of materials. Front materials can be just 8 mm thick or more, provided they are sufficiently stable and strong.

A trial application is recommended.

Nm Minimum tightening torque

| Materials tested by Blum                                         | Nm  |
|------------------------------------------------------------------|-----|
| Chipboard (transverse tensile strength > 0.4 N/mm <sup>2</sup> ) | 1.5 |
| MDF (transverse tensile strength > 0.6 N/mm <sup>2</sup> )       | 1.5 |
| HDF                                                              | 2   |
| HPL                                                              | 2   |
| Mineral composites                                               | 2   |
| <b>Front weight</b>                                              |     |
| Max. 35 kg per front                                             |     |

### Limitation of liability

Blum accepts no liability for the use of EXPANDO T in combination with materials not listed or fittings from other manufacturers. It is recommended that assembly be carried out by an experienced furniture manufacturer.



Find more information on assembly and adjustment of EXPANDO T at  
[www.blum.com/rev13](http://www.blum.com/rev13)

### Gauge set for REVEGO pocket connector










- Drilling template for horizontal drillings of REVEGO pocket connectors on the pocket side wall
- Material: nylon/steel/aluminium

#### Ordering information

STL.8000

## Internal testing and inspection regulations
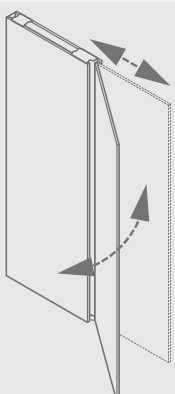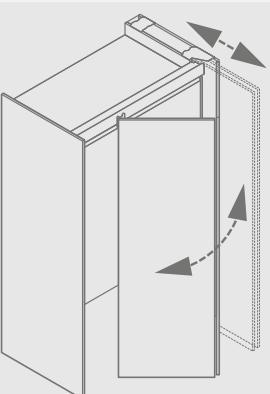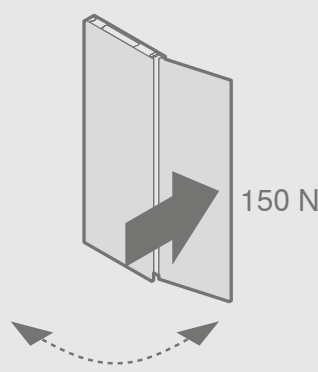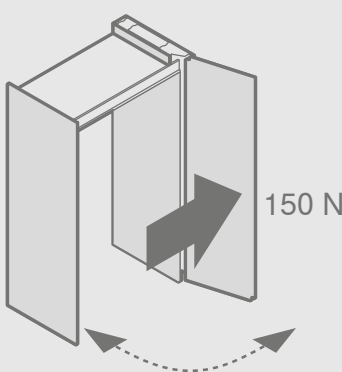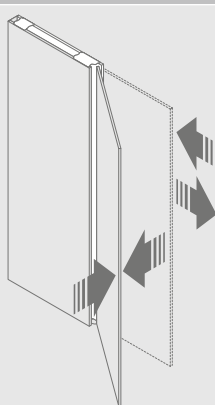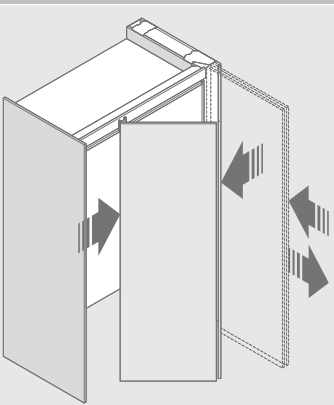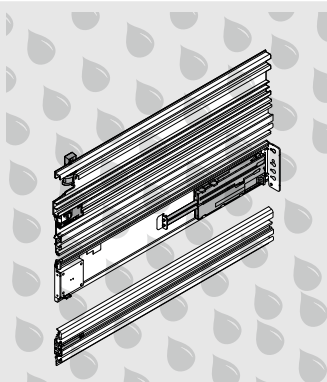
| Durability                                                                          |                                                                                      |                                                                                                       |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|
|    |    | 40,000 opening and closing cycles.                                                                    |
| Abuse test                                                                          |                                                                                      |                                                                                                       |
|   |   | Horizontal load test to ensure that system will withstand misuse                                      |
| Slam open/slam shut test                                                            |                                                                                      |                                                                                                       |
|  |  | To simulate overload when opening and closing and ensure that the fronts do not detach from fittings. |
| Corrosion testing                                                                   |                                                                                      |                                                                                                       |
|  |                                                                                      | Based on DIN EN ISO 9227 and DIN EN ISO 6270-2 for simulating corrosion influences.                   |

Blum U.K.  
Mandeville Drive  
Kingston, Milton Keynes  
GB-Buckinghamshire MK10 0AW  
Tel.: 01908 285700  
Fax: 01908 285701  
E-mail: [info.uk@blum.com](mailto:info.uk@blum.com)

Julius Blum GmbH  
6973 Höchst, Austria  
Tel.: +43 5578 705-0  
Fax: +43 5578 705-44  
E-mail: [info@blum.com](mailto:info@blum.com)  
[www.blum.com](http://www.blum.com)

Our sites in Austria, Poland and China are certified to the international standards mentioned below.  
Our site in the USA is certified to ISO 9001.  
Our site in Brazil is certified to ISO 9001, ISO 14001 and ISO 45001.



**ISO 9001**  
Certified Quality  
System



**ISO 14001**  
Certified Environmental  
System



**ISO 50001**  
Certified Energy  
System

 **blum**®



Look for our  
FSC®-certified  
products

All content is copyrighted by Blum.  
Subject to technical modifications and changes to the range without notice.  
IDNR: 000.000.0 - EP-649/2 EN-GB/10.25